



INSTALLATION INSTRUCTION

1. The fixture is for LED, NON.Replaceable LED.
2. Before installation, make sure that the power supply is off.
3. Follow the steps as down below for installation.
4. After finishing every step, tighten the screws, have the fixture fixed, then connect the power supply.
5. It is recommended that these products are installed by a qualified electrician.



Surface Mounted & Pendant Track




Product Performance

number	L
GOSDT-01	1500mm
GOSDT-02	2100mm
GOSDT-03	2500mm


Article number: GOSDT-05

Type: Surface mounted & pendant horizontal corner


Colours
 Black
 White




Article number : GOSDI-05
 Type : Pendant kit without power cord




Article number : GOSDI-06
 Type : Pendant kit without power cord




Article number: GOSDC-01
 Type: Surface mounted & Recessed power joint




Article number: GOSDC-02
 Type: Surface mounted & Recessed power joint




Article number : GOSDC-03
 Type : Surface mounted & trimless recessed end cap with power cord



Article number : GOSDC-04
 Type : Surface mounted & trimless recessed end cap without power cord.




Models: GOSDC-06
 Type: Reinforced Plate

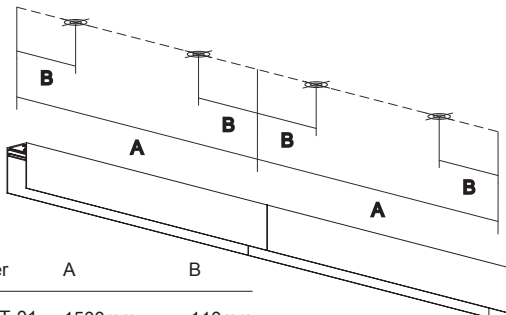


number	A	B
GOSDT-01	1500mm	110mm
GOSDT-02	2000mm	110mm
GOSDT-03	2500mm	110mm
GOSDT-06	760mm	110mm


GOSDC-03

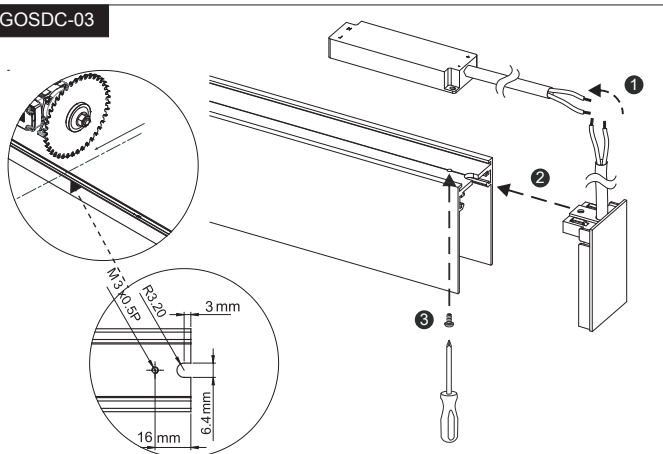




GOSDC-02

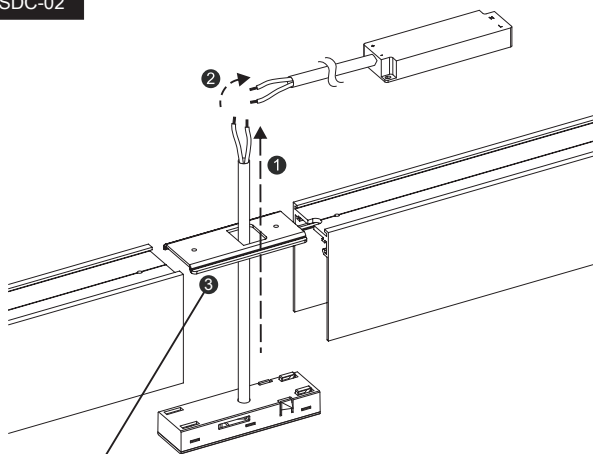


GOSDC-06

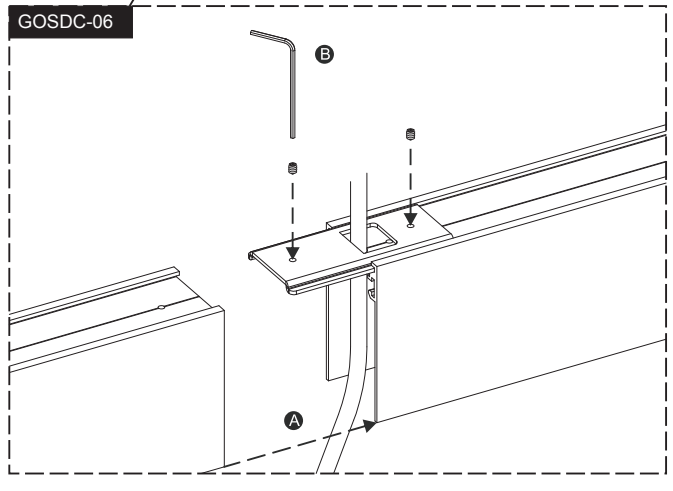


GOSDC-02

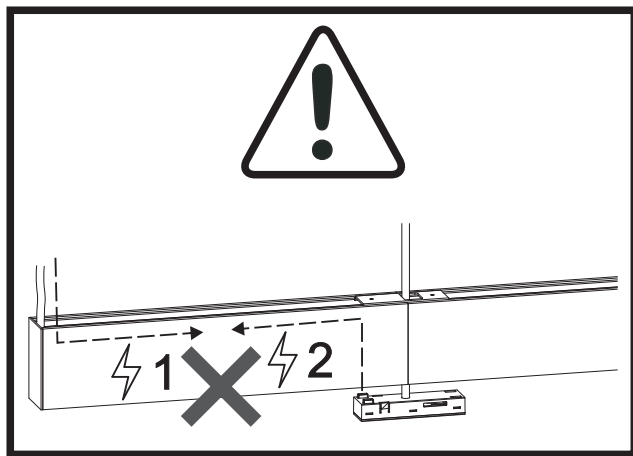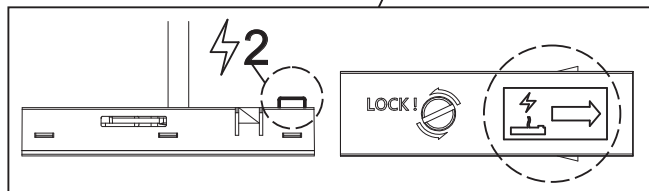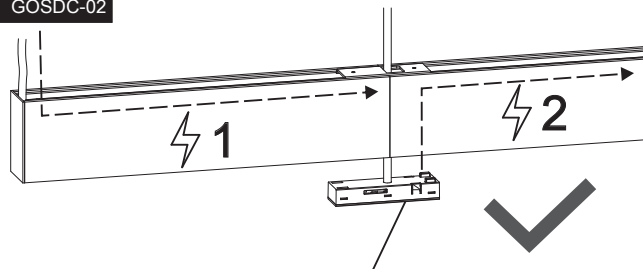


GOSDC-02

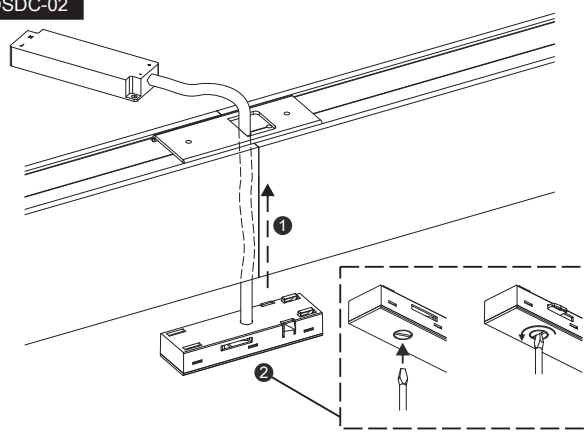



GOSDC-04

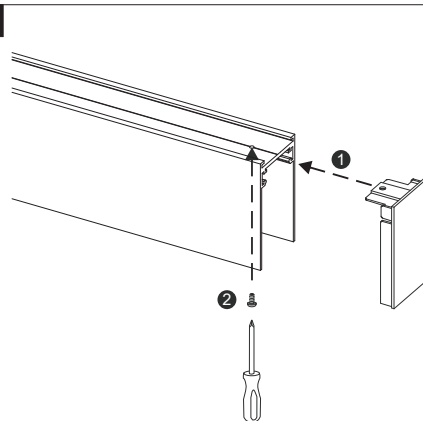




GOSDC-01

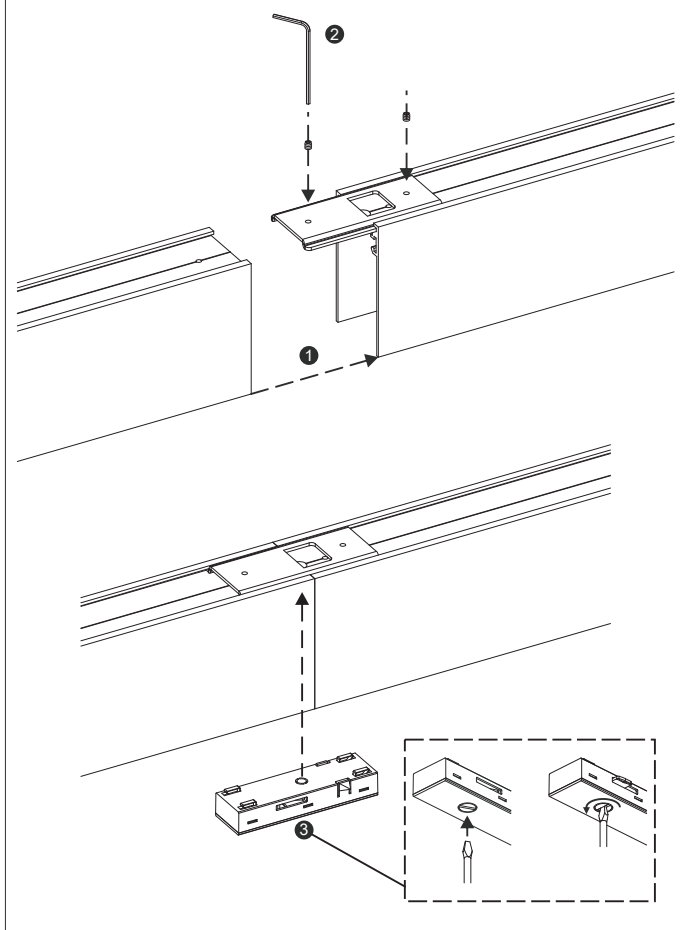

GOSDI-05

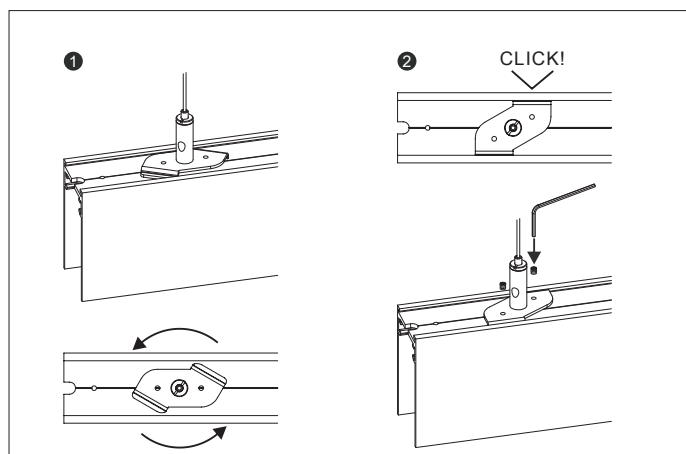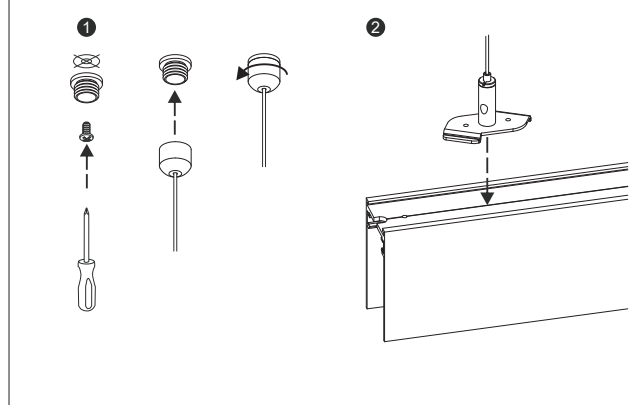


GOSDI-05

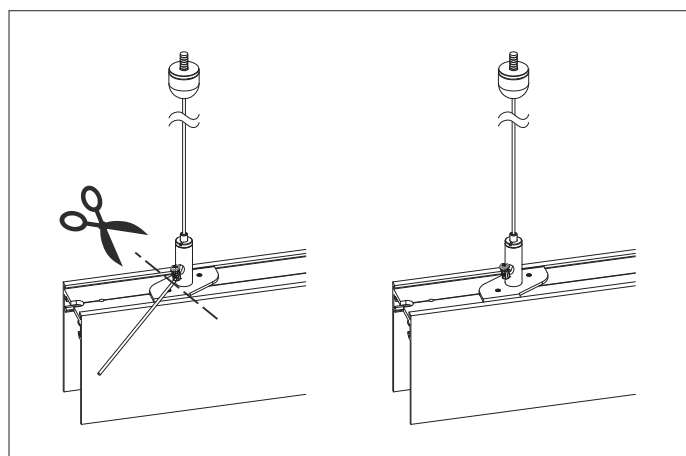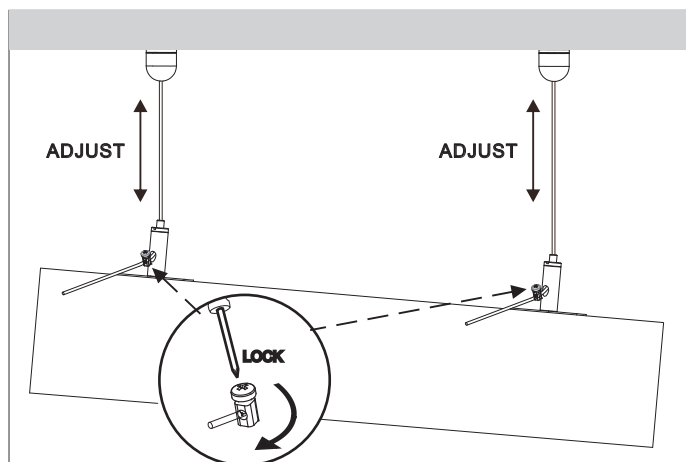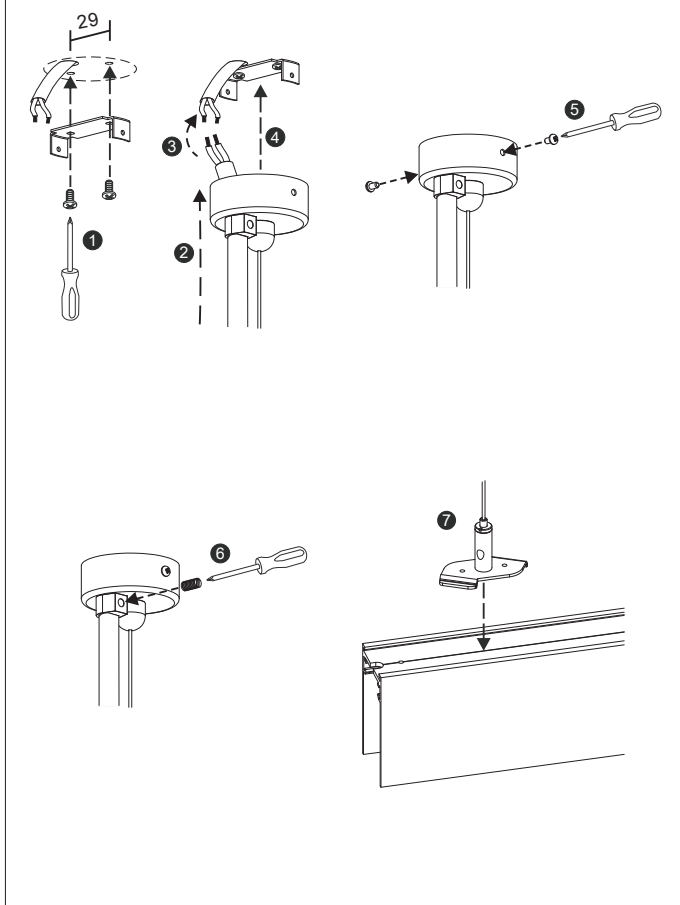

Installation Suspended Track

Application Illustration


⚠ Calculate Cable Length

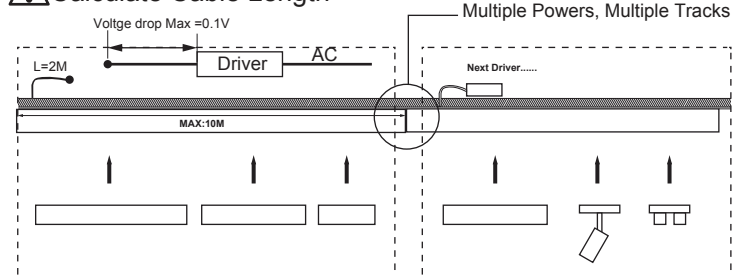

NOTE:



1. Max wattage linkable per loop for 24VDC is 150W.
2. Max length of track linkable per loop is 10M , and the max cable length between driver and track is 2M.
3. Dimming modules are compatible to PWM dimming driver only.
4. To use drivers not on recommended list , it require compatibility test before installation.
5. Tracks allows continuous linkable without limitation, also can divide into sections to light up individual area, making lighting application easy as 123.
6. Minimum voltage per loop is 22VDC (measure at the end of the loop), under 22VDC per loop might cause abnormal.
7. Calculating max wattage connection, save 20% buffer for linear modules, and 25% buffer for other modules.
8. Use driver not in the recommended list might cause module flickering, unstable dimming and/or noise, even causing module failure.
9. When multiple drivers are use in the connection, make sure the connector without circuit is used to divide the loop.
10. When installation tracks (pipes), make sure measuring the voltage from GOSDC-02 & GOSDC-03/GOSDC-03A with the driver connected first, without modules, to see if the voltage is 24VDC, then measure the track & GOSDC-02 & GOSDC-03 / GOSDC-03A to see if the voltage drop is $\leq 0.1V$, if the voltage drop is over 0.1V, make sure the connector is secured properly, warpage is not allowed in the connection, also check the cleanliness of the copper connector, copper connector can be cleaned using alcohol.

① Single Power , Single Track

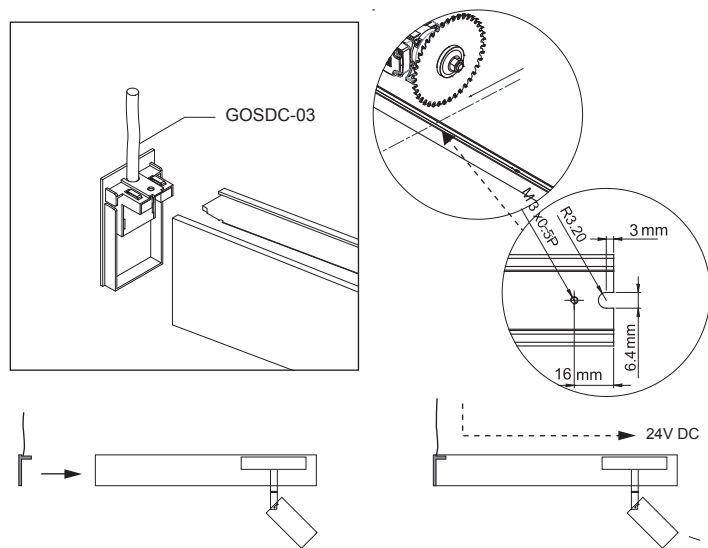

Using power end cap (GOSDC-03) as power feed

② Single Power, Multiple Tracks

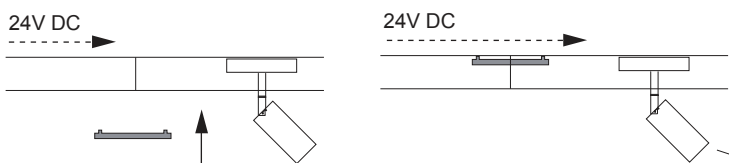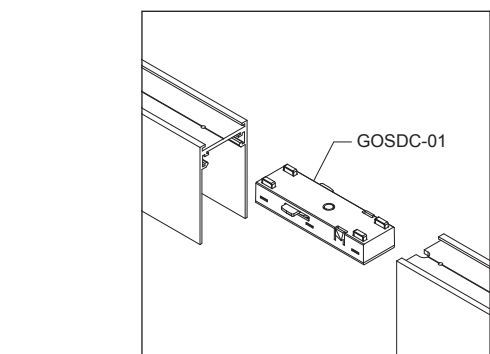

Using circuit joint (GOSDC-01) to connect between tracks

③ Multiple Powers, Multiple Tracks

