





Aeros



Rond pendel LED armatuur gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006). Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma. Gelijke licht dichtheid tussen verschillende afmetingen. De EasySense-sensor combineert beweging- en daglichtregeling. Tot 40 sensoren kunnen draadloos worden gegroepeerd. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Wordt geleverd inclusief pendel accessoires: staalkabels (3m) en snoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round pendant luminaire made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006). Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser. The EasySense sensor combines occupancy sensing, daylight harvesting and task tuning. Up to 40 sensors can be grouped wireless. Suitable for shopping centres, social and cultural amenities or representation areas. Delivered including pendant suspension, steel cables (3m) and mains cable (3,5m). Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty five years.

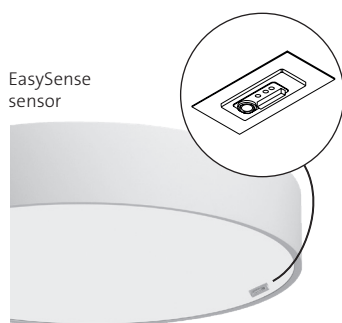


Micro Prisma / Micro Prism

Wattage Wattage	Kleur Colour	Diameter (mm) Diameter (mm)	Lumen* Lumen*	kg kg	Noodvoorz. (u) Emergency (h)	Artikelnr. Article number	Dali Dali
18w	3000k	350	2280	3,2	1/3	26006_M.35.30	26006_M.35.32
36w	3000k	600	4560	4,4	1/3	26006_M.60.30	26006_M.60.32
60w	3000k	900	7620	6,5	1/3	26006_M.90.30	26006_M.90.32
90w	3000k	1200	11.425	9,0	1/3	26006_M.120.30	26006_M.120.32
18w	4000k	350	2395	3,2	1/3	26006_M.35.40	26006_M.35.42
36w	4000k	600	4790	4,4	1/3	26006_M.60.40	26006_M.60.42
60w	4000k	900	8000	6,5	1/3	26006_M.90.40	26006_M.90.42
90w	4000k	1200	11.995	9,0	1/3	26006_M.120.40	26006_M.120.42

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

Opaal / Opal

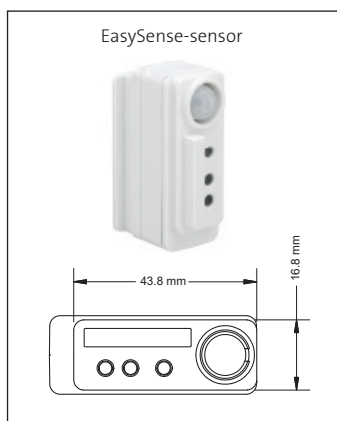

Wattage Wattage	Kleur Colour	Diameter (mm) Diameter (mm)	Lumen* Lumen*	kg kg	Noodvoorz. (u) Emergency (h)	Artikelnr. Article number	Dali Dali
18w	3000k	350	2170	3,2	1/3	26006_OP.35.30	26006_OP.35.32
36w	3000k	600	4345	4,4	1/3	26006_OP.60.30	26006_OP.60.32
60w	3000k	900	7255	6,5	1/3	26006_OP.90.30	26006_OP.90.32
90w	3000k	1200	10.880	9,0	1/3	26006_OP.120.30	26006_OP.120.32
18w	4000k	350	2280	3,2	1/3	26006_OP.35.40	26006_OP.35.42
36w	4000k	600	4560	4,4	1/3	26006_OP.60.40	26006_OP.60.42
60w	4000k	900	7620	6,5	1/3	26006_OP.90.40	26006_OP.90.42
90w	4000k	1200	11.425	9,0	1/3	26006_OP.120.40	26006_OP.120.42

_ W=wit / B=zwart / G=grijs

_ W=white / B=black / G=grey

*Lichtstroom van armatuur, tolerantie van +/- 10%


*Luminaire luminous flux, tolerance of +/- 10%

Opties:

- Geïntegreerde bewegingssensor
- EasySense-sensor

Options:

- Integrated motionsensor
- EasySense-sensor

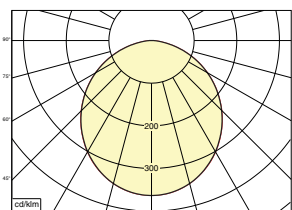

26006_M.35.30
18W 3000K 2280lm
ηLB 100%