



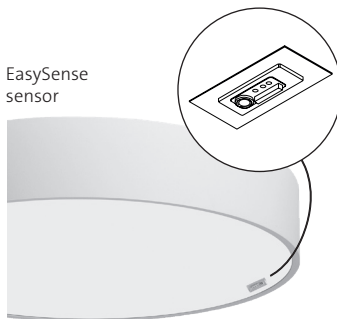

# Aeros

Rond opbouw LED armatuur gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006). Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma. Gelijke licht dichtheid tussen verschillende afmetingen. De EasySense-sensor combineert beweging- en daglichtregeling. Tot 40 sensoren kunnen draadloos worden gegroepeerd. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round surface mounted luminaire made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006). Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser. The EasySense sensor combines occupancy sensing, daylight harvesting and task tuning. Up to 40 sensors can be grouped wireless. Suitable for shopping centres, social and cultural amenities or representation areas. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Warranty five years.



## Micro Prisma / Micro Prism

Wattage Wattage	Kleur Colour	Lumen* Lumen*	Diameter (mm) Diameter (mm)	kg	Noodvoorz. (u) Emergency (h)	Artikelnr. Article number	Dali Dali	Casambi Casambi
16w	3000k	2145	350	3,2	1/3	26002_M.35.30	26002_M.35.32	26002_M.35.35
34w	3000k	4560	600	4,4	1/3	26002_M.60.30	26002_M.60.32	26002_M.60.35
60w	3000k	7620	900	6,5	1/3	26002_M.90.30	26002_M.90.32	26002_M.90.35
90w	3000k	11.425	1200	9,0	1/3	26002_M.120.30	26002_M.120.32	26002_M.120.35
16w	4000k	2250	350	3,2	1/3	26002_M.35.40	26002_M.35.42	26002_M.35.45
34w	4000k	4790	600	4,4	1/3	26002_M.60.40	26002_M.60.42	26002_M.60.45
60w	4000k	8000	900	6,5	1/3	26002_M.90.40	26002_M.90.42	26002_M.90.45
90w	4000k	11.995	1200	9,0	1/3	26002_M.120.40	26002_M.120.42	26002_M.120.45

\_ W=wit / B=zwart / G=grijs

\_ W=white / B=black / G=grey

## Opaal / Opal

Wattage Wattage	Kleur Colour	Lumen* Lumen*	Diameter (mm) Diameter (mm)	kg	Noodvoorz. (u) Emergency (h)	Artikelnr. Article number	Dali Dali	Casambi Casambi
16w	3000k	2040	350	3,2	1/3	26002_OP.35.30	26002_OP.35.32	26002_OP.35.35
34w	3000k	4345	600	4,4	1/3	26002_OP.60.30	26002_OP.60.32	26002_OP.60.35
60w	3000k	7255	900	6,5	1/3	26002_OP.90.30	26002_OP.90.32	26002_OP.90.35
90w	3000k	10.880	1200	9,0	1/3	26002_OP.120.30	26002_OP.120.32	26002_OP.120.35
16w	4000k	2145	350	3,2	1/3	26002_OP.35.40	26002_OP.35.42	26002_OP.35.45
34w	4000k	4560	600	4,4	1/3	26002_OP.60.40	26002_OP.60.42	26002_OP.60.45
60w	4000k	7620	900	6,5	1/3	26002_OP.90.40	26002_OP.90.42	26002_OP.90.45
90w	4000k	11.425	1200	9,0	1/3	26002_OP.120.40	26002_OP.120.42	26002_OP.120.45

\_ W=wit / B=zwart / G=grijs

\_ W=white / B=black / G=grey

\*Lichtstroom van armatuur, tolerantie van +/- 10%



\*Luminaire luminous flux, tolerance of +/- 10%

### Opties:

- Geïntegreerde bewegingssensor
- EasySense-sensor

### Options:

- Integrated motionsensor
- EasySense-sensor

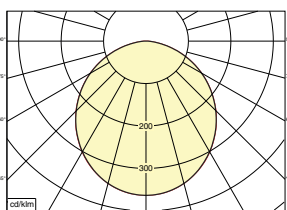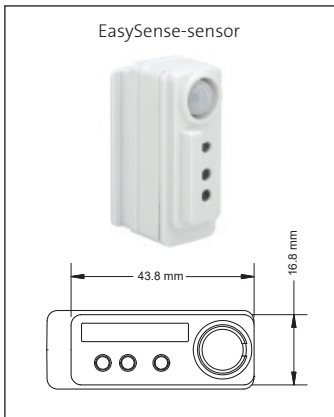

**26002\_M.35.30**  
16W 3000K 2145lm  
ηLB 100%