Aeros Square

PF>0,95 IP40

Vierkant opbouw LED armatuur gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006). Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma. Gelijke licht dichtheid tussen verschillende afmetingen. De EasySense-sensor combineert beweging- en daglichtregeling. Tot 40 sensoren kunnen draadloos worden gegroepeerd. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Square surface mounted luminaire made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006). Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser. The EasySense sensor combines occupancy sensing, daylight harvesting and task tuning. Up to 40 sensors can be grouped wireless. Suitable for shopping centres, social and cultural amenities or representation areas. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty five years.

Micro Prisma / *Micro Prism*

Wattage *Wattage*	**Kleur** *Colour*	**Lumen*** *Lumen**	**Lengte (mm)** *Length (mm)*	**Breedte(mm)** *Width(mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikelnr.** *Article number*	**Dali** *Dali*	**Casambi** *Casambi*	**EasySense** *Easysense*
16w	3000k	2100	400	400	3,2	1/3	26010_M.40.30	26010_M.40.32	26010_M.40.35	26010_M.40.37
34w	3000k	4465	600	600	4,4	1/3	26010_M.60.30	26010_M.60.32	26010_M.60.35	26010_M.60.37
60w	3000k	7875	900	900	6,5	1/3	26010_M.90.30	26010_M.90.32	26010_M.90.35	26010_M.90.37
16w	4000k	2205	400	400	3,2	1/3	26010_M.40.40	26010_M.40.42	26010_M.40.45	26010_M.40.47
34w	4000k	4690	600	600	4,4	1/3	26010_M.60.40	26010_M.60.42	26010_M.60.45	26010_M.60.47
60w	4000k	8270	900	900	6,5	1/3	26010_M.90.40	26010_M.90.42	26010_M.90.45	26010_M.90.47

Opaal / *Opal*


Wattage *Wattage*	**Kleur** *Colour*	**Lumen*** *Lumen**	**Lengte (mm)** *Length (mm)*	**Breedte(mm)** *Width(mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikelnr.** *Article number*	**Dali** *Dali*	**Casambi** *Casambi*	**EasySense** *EasySense*
16w	3000k	2000	400	400	3,2	1/3	26010_OP.40.30	26010_OP.40.32	26010_OP.40.35	26010_OP.40.37
34w	3000k	4250	600	600	4,4	1/3	26010_OP.60.30	26010_OP.60.32	26010_OP.60.35	26010_OP.60.37
60w	3000k	7500	900	900	6,5	1/3	26010_OP.90.30	26010_OP.90.32	26010_OP.90.35	26010_OP.90.37
16w	4000k	2100	400	400	3,2	1/3	26010_OP.40.40	26010_OP.40.42	26010_OP.40.45	26010_OP.40.47
34w	4000k	4465	600	600	4,4	1/3	26010_OP.60.40	26010_OP.60.42	26010_OP.60.45	26010_OP.60.47
60w	4000k	7875	900	900	6,5	1/3	26010_OP.90.40	26010_OP.90.42	26010_OP.90.45	26010_OP.90.47


_ W=wit / B=zwart / G=grijs


* Lichtstroom van armatuur, tolerantie van +/- 10%

_ W=white / B=black / G=grey

* *Luminaire luminous flux, tolerance of +/- 10%*



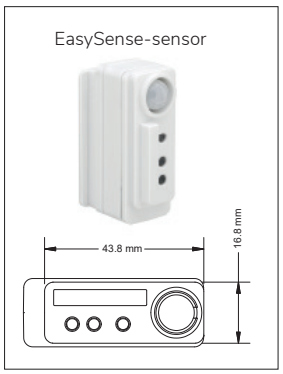

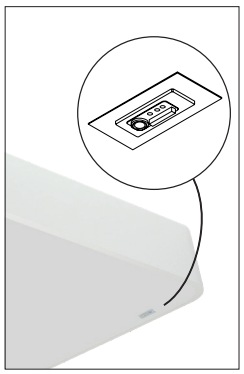


OPBOUW ARMATUREN

SURFACE MOUNTED LUMINAIRES



Opties:
- Geïntegreerde bewegingssensor
- EasySense-sensor

Options:
- *Integrated motionsensor*
- *EasySense-sensor*



26010_M.40.30
16W 3000K 2100lm
ηLB 100%

melis lighting