Aeros Square UP/DOWN

PF>0,95 IP40

Vierkant opbouw LED armatuur gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006), met zowel direct als indirecte uitstraling. Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma. Gelijke licht dichtheid tussen verschillende afmetingen. De EasySense-sensor combineert beweging- en daglichtregeling. Tot 40 sensoren kunnen draadloos worden gegroepeerd. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Square surface mounted luminaire made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006), with direct and indirect beam angle. Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser. The EasySense sensor combines occupancy sensing, daylight harvesting and task tuning. Up to 40 sensors can be grouped wireless. Suitable for shopping centres, social and cultural amenities or representation areas. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty five years.

Micro Prisma / *Micro Prism*

Wattage *Wattage*	**Kleur** *Colour*	**Lumen*** *Lumen**	**Lengte(mm)** *Length (mm)*	**Breedte(mm)** *Width(mm)*	**kg** *kg*	**Artikelnr.** *Article number*	**Dali** *Dali*	**Casambi** *Casambi*	**EasySense** *EasySense*
16w-10w	3000k	2100/1315	400	400	3,7	26016_M.40.30	26016_M.40.32	26016_M.40.35	26016_M.40.37
34w-16w	3000k	4465/2100	600	600	4,9	26016_M.60.30	26016_M.60.32	26016_M.60.35	26016_M.60.37
60w-23w	3000k	7875/3020	900	900	7,0	26016_M.90.30	26016_M.90.32	26016_M.90.35	26016_M.90.37
16w-10w	4000k	2205/1380	350	350	3,7	26016_M.35.40	26016_M.35.42	26016_M.35.45	26016_M.35.47
34w-16w	4000k	4690/2205	600	600	4,9	26016_M.60.40	26016_M.60.42	26016_M.60.45	26016_M.60.47
60w-23w	4000k	8270/3170	900	900	7,0	26016_M.90.40	26016_M.90.42	26016_M.90.45	26016_M.90.47

Opaal / *Opal*


Wattage *Wattage*	**Kleur** *Colour*	**Lumen*** *Lumen**	**Lengte (mm)** *Length (mm)*	**Breedte(mm)** *Width(mm)*	**kg** *kg*	**Artikelnr.** *Article number*	**Dali** *Dali*	**Casambi** *Casambi*	**EasySense** *EasySense*
16w-10w	3000k	2000/1250	400	400	3,7	26016_OP.40.30	26016_OP.40.32	26016_OP.40.35	26016_OP.40.37
34w-16w	3000k	4250/2000	600	600	4,9	26016_OP.60.30	26016_OP.60.32	26016_OP.60.35	26016_OP.60.37
60w-23w	3000k	7500/2875	900	900	7,0	26016_OP.90.30	26016_OP.90.32	26016_OP.90.35	26016_OP.90.37
16w-10w	4000k	2100/1315	350	350	3,7	26016_OP.35.40	26016_OP.35.42	26016_OP.35.45	26016_OP.35.47
34w-16w	4000k	4465/2100	600	600	4,9	26016_OP.60.40	26016_OP.60.42	26016_OP.60.45	26016_OP.60.47
60w-23w	4000k	7875/3020	900	900	7,0	26016_OP.90.40	26016_OP.90.42	26016_OP.90.45	26016_OP.90.47


_ W=wit / B=zwart / G=grijs


_ W=white / B=black / G=grey

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*



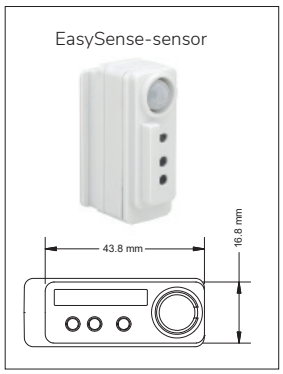

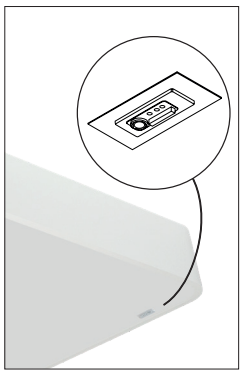




OPBOUW ARMATUREN

SURFACE MOUNTED LUMINAIRES





26016_M.40.30

16W-10w 3000K 2100-1315lm

ηLB 100%

melis lighting