Aeros SUSPENDED

PF>0,95 IP40

Rond pendel LED armatuur gemaakt uit wit gelakt (RAL 9003) aluminium (optioneel zwart RAL 9005 of zilvergrijs RAL 9006). Homogeen verlichte diffuser van dual satin opaal PMMA of Microprisma. Gelijke licht dichtheid tussen verschillende afmetingen. De EasySense-sensor combineert beweging- en daglichtregeling. Tot 40 sensoren kunnen draadloos worden gegroepeerd. Geschikt voor toepassing in onder andere winkelcentra, culturele gebouwen of kantoren. Wordt geleverd inclusief pendel accessoires: staalkabels (3m) en snoer (3,5m). Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round suspended LED luminaire made of white (RAL 9003) painted aluminium (optionally black RAL 9005 or silver grey RAL 9006). Completely homogeneously illuminated with dual satinised PMMA cover or micro prisma diffuser. The EasySense sensor combines occupancy sensing, daylight harvesting and task tuning. Up to 40 sensors can be grouped wireless. Suitable for shopping centres, social and cultural amenities or representation areas. Delivered including pendant suspension, steel cables (3m) and mains cable (3,5m).Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty five years.

Micro Prisma / *Micro Prism*

Wattage *Wattage*	**Kleur** *Colour*	**Diameter (mm)** *Diameter (mm)*	**Lumen*** *Lumen**	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikelnr.** *Article number*	**Dali** *Dali*	**Casambi** *Casambi*	**EasySense** *EasySense*
18w	3000k	350	2340	3,2	1/3	26006_M.35.30	26006_M.35.32	26006_M.35.35	26006_M.35.37**
36w	3000k	600	4680	4,4	1/3	26006_M.60.30	26006_M.60.32	26006_M.60.35	26006_M.60.37
65w	3000k	900	8450	6,5	1/3	26006_M.90.30	26006_M.90.32	26006_M.90.35	26006_M.90.37
90w	3000k	1200	11.700	9,0	1/3	26006_M.120.30	26006_M.120.32	26006_M.120.35	26006_M.120.37
18w	4000k	350	2455	3,2	1/3	26006_M.35.40	26006_M.35.42	26006_M.35.45	26006_M.35.47**
36w	4000k	600	4915	4,4	1/3	26006_M.60.40	26006_M.60.42	26006_M.60.45	26006_M.60.47
65w	4000k	900	8870	6,5	1/3	26006_M.90.40	26006_M.90.42	26006_M.90.45	26006_M.90.47
90w	4000k	1200	12.285	9,0	1/3	26006_M.120.40	26006_M.120.42	26006_M.120.45	26006_M.120.47

Opaal / *Opal*

Wattage *Wattage*	**Kleur** *Colour*	**Diameter (mm)** *Diameter (mm)*	**Lumen*** *Lumen**	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikelnr.** *Article number*	**Dali** *Dali*	**Casambi** *Casambi*	**EasySense** *EasySense*
18w	3000k	350	2225	3,2	1/3	26006_OP.35.30	26006_OP.35.32	26006_OP.35.35	26006_OP.35.37**
36w	3000k	600	4445	4,4	1/3	26006_OP.60.30	26006_OP.60.32	26006_OP.60.35	26006_OP.60.37
65w	3000k	900	8030	6,5	1/3	26006_OP.90.30	26006_OP.90.32	26006_OP.90.35	26006_OP.90.37
90w	3000k	1200	11.115	9,0	1/3	26006_OP.120.30	26006_OP.120.32	26006_OP.120.35	26006_OP.120.37
18w	4000k	350	2330	3,2	1/3	26006_OP.35.40	26006_OP.35.42	26006_OP.35.45	26006_OP.35.47**
36w	4000k	600	4670	4,4	1/3	26006_OP.60.40	26006_OP.60.42	26006_OP.60.45	26006_OP.60.47
65w	4000k	900	8425	6,5	1/3	26006_OP.90.40	26006_OP.90.42	26006_OP.90.45	26006_OP.90.47
90w	4000k	1200	11.670	9,0	1/3	26006_OP.120.40	26006_OP.120.42	26006_OP.120.45	26006_OP.120.47

_ W=wit / B=zwart / G=grijs


* Lichtstroom van armatuur, tolerantie van +/- 10%


** EasySense diameter 400mm


_ W=white / B=black / G=grey

* *Luminaire luminous flux, tolerance of +/- 10%*

** *EasySense diameter 400mm*



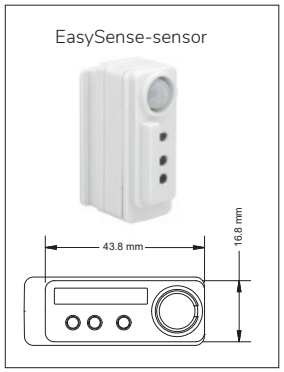

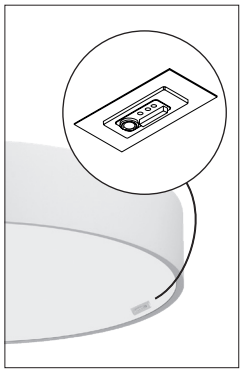


PENDEL ARMATUREN *SUSPENDED LUMINAIRES*



Opties:
- Geïntegreerde bewegingssensor
- EasySense-sensor

Options:
- *Integrated motionsensor*
- *EasySense-sensor*



26006_M.35.30
18W 3000K 2340lm
ηLB 100%

melis lighting