Air Grid

PF>0,95 IP40


Inlegarmatuur met decoratieve perforatie voor plenumafzuiging in rand. Voorzien van hoog rendement LED technologie. Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Voorzien van micro prisma (UGR<19) afscherming met brede uitstralingshoek >95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Recessed LED luminaire with decorative perforation for plenum ventilation in trim. Including high efficiency LED technology. Housing made of white painted (RAL 9003) sheet metal. Micro prism diffuser (UGR<19) with wide beam angle >95°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L90B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
24w	3000k	3374	>80	1195	147	4	1/3	61384WA.24.30	61384WA.24.32	61384WA.24.37
29w	3000k	4077	>80	1195	147	4	1/3	61384WA.29.30	61384WA.29.32	61384WA.29.37
34w	3000k	4780	>80	1195	147	4	1/3	61384WA.34.30	61384WA.34.32	61384WA.34.37
30w	3000k	4218	>80	1495	147	5	1/3	61384WB.30.30	61384WB.30.32	61384WB.30.37
36w	3000k	5062	>80	1495	147	5	1/3	61384WB.36.30	61384WB.36.32	61384WB.36.37
43w	3000k	6046	>80	1495	147	5	1/3	61384WB.43.30	61384WB.43.32	61384WB.44.37
30w	3000k	4218	>80	1720	147	5,5	1/3	61384WC.30.30	61384WC.30.32	61384WC.30.37
36w	3000k	5062	>80	1720	147	5,5	1/3	61384WC.36.30	61384WC.36.32	61384WC.36.37
43w	3000k	6046	>80	1720	147	5,5	1/3	61384WC.43.30	61384WC.43.32	61384WC.43.37
24w	4000k	3552	>80	1195	147	4	1/3	61384WA.24.40	61384WA.24.42	61384WA.24.47
29w	4000k	4292	>80	1195	147	4	1/3	61384WA.29.40	61384WA.29.42	61384WA.29.47
34w	4000k	5032	>80	1195	147	4	1/3	61384WA.34.40	61384WA.34.42	61384WA.34.47
30w	4000k	4440	>80	1495	147	5	1/3	61384WB.30.40	61384WB.30.42	61384WB.30.47
36w	4000k	5328	>80	1495	147	5	1/3	61384WB.36.40	61384WB.36.42	61384WB.36.47
43w	4000k	6364	>80	1495	147	5	1/3	61384WB.43.40	61384WB.43.42	61384WB.43.47
30w	4000k	4440	>80	1720	147	5,5	1/3	61384WC.30.40	61384WC.30.42	61384WC.30.47
36w	4000k	5328	>80	1720	147	5,5	1/3	61384WC.36.40	61384WC.36.42	61384WC.36.47
43w	4000k	6364	>80	1720	147	5,5	1/3	61384WC.43.40	61384WC.43.42	61384WC.43.47

* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

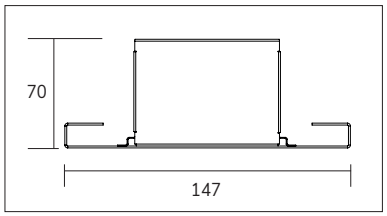



Opties:
- Daglicht en bewegingsregeling ingebouwd in de diffuser
- M625 plafondmaat
- 5000k
- CRI>90
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Options:
- *Daylight and motion control sensor build into the diffuser*
- *M625 ceiling size*
- *5000k*
- *CRI>90*
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*



61384WA.24.30
24w 3000k 3374 lm
ηLB 75%

melis lighting