Air Micro TW

PF>0,95 IP40

INBOUW ARMATUREN RECESSED LUMINAIRES

Tunable White


Inlegarmatuur met decoratieve perforatie voor plenumafzuiging in rand. Met hoog rendement Tuneable White LED technologie. Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Voorzien van micro prisma (UGR<18) afscherming met brede uitstralingshoek >95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Recessed LED luminaire with decorative perforation for plenum ventilation in trim. With high efficiency Tuneable white technology. Housing made of white painted (RAL 9003) sheet metal. Micro prism diffuser (UGR<18) with wide beam angle >95°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L90B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI (Ra)** CRI (Ra)	**Lengte (mm)** Length (mm)	**Breedte (mm)** Width (mm)	**Hoogte (mm)** Height (mm)	**Gewicht (kg)** Weight (kg)	**Noodvoorz. (u)** Emergency (h)	**Artikel nr.** Article no.
18w	2700k - 6500k	2265	>80	595	147	70	2	1	23010M.18.TW
36w	2700k - 6500k	4525	>80	1195	147	70	4	1	23010M.36.TW
46w	2700k - 6500k	5660	>80	1495	147	70	5	1	23010M.46.TW

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

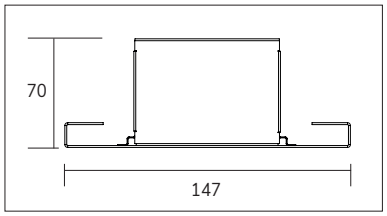




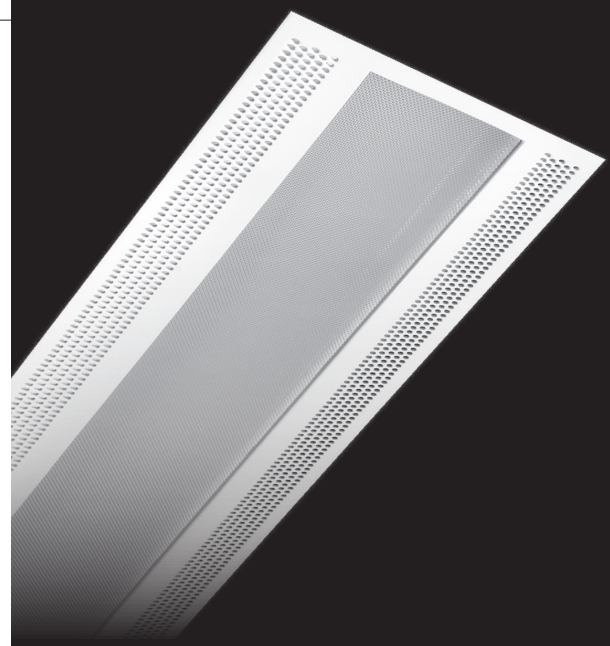

Opties:
- Daglicht en bewegingsregeling ingebouwd in de diffuser
- M625 plafondmaat
- 5000k
- CRI>90
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Options:
- *Daylight and motion control sensor build into the diffuser*
- *M625 ceiling size*
- *5000k*
- *CRI>90*
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*



23010M.36.TW
36w 2700k-6500k 4525lm
ηLB 75,4%

melis lighting