Air Micro

PF>0,95 IP40 RoHS


Inlegarmatuur met decoratieve perforatie voor plenumafzuiging in rand. Voorzien van hoog rendement LED technologie. Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Voorzien van micro prisma (UGR<19) afscherming met brede uitstralingshoek >95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Recessed LED luminaire with decorative perforation for plenum ventilation in trim. Including with high efficiency LED technology. Housing made of white painted (RAL 9003) sheet metal. Micro prism diffuser (UGR<19) with wide beam angle >95°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L90B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage Watts	**Kleur** Colour	**Lumen*** Lumen*	**CRI (Ra)** CRI (Ra)	**Lengte (mm)** Length (mm)	**Breedte (mm)** Width (mm)	**kg** kg	**Noodvoorz. (u)** Emergency (h)	**Artikel nr.** Article no.	**Dali** Dali	**EasySense** EasySense
16w	3000k	1856	>80	1195	147	4	1/3	61108WA.16.30	61108WA.16.32	61108WA.16.37
24w	3000k	2784	>80	1195	147	4	1/3	61108WA.24.30	61108WA.24.32	61108WA.24.37
32w	3000k	3712	>80	1195	147	4	1/3	61108WA.32.30	61108WA.32.32	61108WA.32.37
20w	3000k	2320	>80	1495	147	5	1/3	61108WB.20.30	61108WB.20.32	61108WB.20.37
30w	3000k	3480	>80	1495	147	5	1/3	61108WB.30.30	61108WB.30.32	61108WB.30.37
40w	3000k	4640	>80	1495	147	5	1/3	61108WB.40.30	61108WB.40.32	61108WB.40.37
20w	3000k	2320	>80	1720	147	5,5	1/3	61108WC.20.30	61108WC.20.32	61108WC.20.37
30w	3000k	3480	>80	1720	147	5,5	1/3	61108WC.30.30	61108WC.30.32	61108WC.30.37
40w	3000k	4640	>80	1720	147	5,5	1/3	61108WC.40.30	61108WC.40.32	61108WC.40.37
16w	4000k	1949	>80	1195	147	4	1/3	61108WA.16.40	61108WA.16.42	61108WA.16.47
24w	4000k	2923	>80	1195	147	4	1/3	61108WA.24.40	61108WA.24.42	61108WA.24.47
32w	4000k	3898	>80	1195	147	4	1/3	61108WA.32.40	61108WA.32.42	61108WA.32.47
20w	4000k	2436	>80	1495	147	5	1/3	61108WB.20.40	61108WB.20.42	61108WB.20.47
30w	4000k	3654	>80	1495	147	5	1/3	61108WB.30.40	61108WB.30.42	61108WB.30.47
40w	4000k	4872	>80	1495	147	5	1/3	61108WB.40.40	61108WB.40.42	61108WB.40.47
20w	4000k	2436	>80	1720	147	5,5	1/3	61108WC.20.40	61108WC.20.42	61108WC.20.47
30w	4000k	3654	>80	1720	147	5,5	1/3	61108WC.30.40	61108WC.30.42	61108WC.30.47
40w	4000k	4872	>80	1720	147	5,5	1/3	61108WC.40.40	61108WC.40.42	61108WC.40.47


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

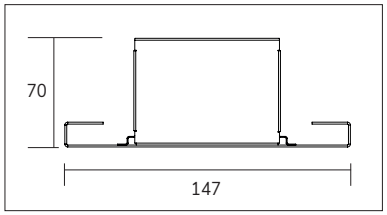


Optionele perforatie bij een breedte >150mm *Optional perforation width >150mm*



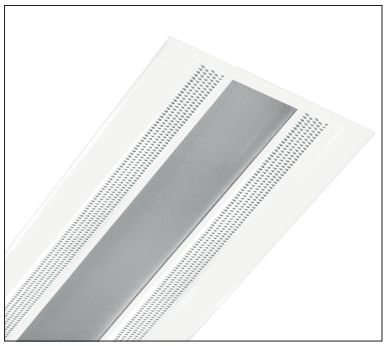




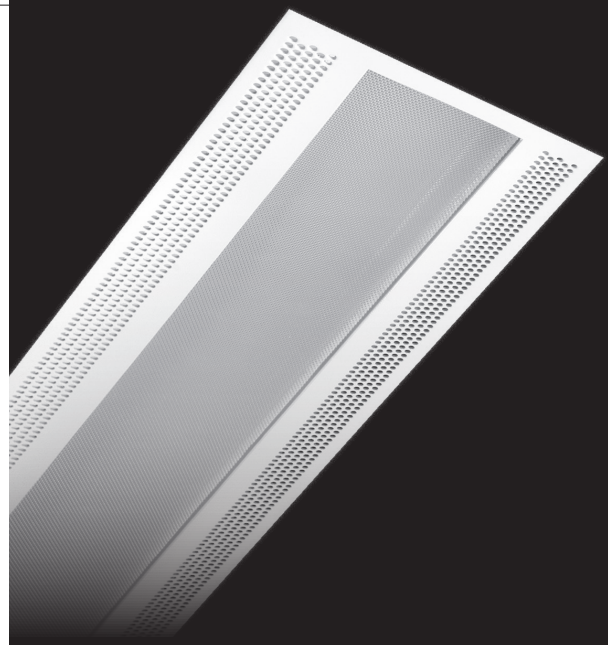

Opties:
- Daglicht en bewegingsregeling ingebouwd in de diffuser
- M625 plafondmaat
- 5000k
- CRI>90
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Options:
- *Daylight and motion control sensor build into the diffuser*
- *M625 ceiling size*
- *5000k*
- *CRI>90*
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*



61108WA.16.30
16w 3000k 1856lm
ηLB 75%

melis lighting