


Slank LED inlegarmatuur voor bandraster plafonds. Apollo is een modulaair systeem waarbij standaard maten light engine in op maat gemaakte bandrasterbehuizingen worden geassembleerd. Apollo wordt daarom uitsluitend als maatwerkproduct voor projecten geproduceerd. Breedte en lengte van het armatuur wordt aangepast aan het plafond. De met hoog voltage en hoog rendement LED lines en brede bundel (88°). Vervaardigd uit wit gelakt (RAL 9003) plaatstaal. Hoogglans aluminium Miro reflector met lage verblinding (UGR<17) en brede uitstralingshoek >92°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Slim recessed LED luminaire for metal grid ceilings. Apollo is a modular system where standard sized light engines are fitted into customized luminaire housings. Apollo is a product that is made specifically for each project. The length and width of the housing are made to fit each ceiling type. High voltage and high efficiency LED lines and wide beam angle (88°). Housing made of white painted (RAL 9003) sheet metal. With specular aluminum Miro louvre with low glare (UGR<17) and wide beam angle >92°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali	EasySense EasySense
28w	3000k	3360	>80	1195	147	4	1/3	21027WA.28.30	21027WA.28.32	21027WA.28.37
40w	3000k	4800	>80	1195	147	4	1/3	21027WA.40.30	21027WA.40.32	21027WA.40.37
28w	3000k	3360	>80	1495	147	5	1/3	21027WB.28.30	21027WB.28.32	21027WB.28.37
40w	3000k	4800	>80	1495	147	5	1/3	21027WB.40.30	21027WB.40.32	21027WB.40.37
28w	3000k	3360	>80	1720	147	5,5	1/3	21027WC.28.30	21027WC.28.32	21027WC.28.37
40w	3000k	4800	>80	1720	147	5,5	1/3	21027WC.40.30	21027WC.40.32	21027WC.40.37
28w	4000k	3528	>80	1195	147	4	1/3	21027WA.28.40	21027WA.28.42	21027WA.28.47
40w	4000k	5040	>80	1195	147	4	1/3	21027WA.40.40	21027WA.40.42	21027WA.40.47
28w	4000k	3528	>80	1495	147	5	1/3	21027WB.28.40	21027WB.28.42	21027WB.28.47
40w	4000k	5040	>80	1495	147	5	1/3	21027WB.40.40	21027WB.40.42	21027WB.40.47
28w	4000k	3528	>80	1720	147	5,5	1/3	21027WC.28.40	21027WC.28.42	21027WC.28.47
40w	4000k	5040	>80	1720	147	5,5	1/3	21027WC.40.40	21027WC.40.42	21027WC.40.47



* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%




Toelichting:
Buitenmaat = maatwerk

Illustration:
Customized outersize

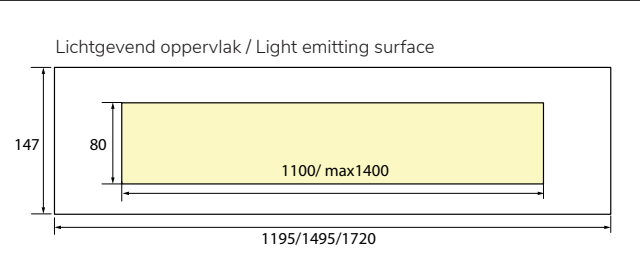

- Opties:**
- Daglichtregeling
 - Bewegingsmelder
 - Daglichtregeling & bewegingssensor
 - Plenum ventilatie achter het louvre
 - GST18i3® connector + BST14i2 connector
 - GST18i5® connector
 - Andere RAL kleur

- Optional:**
- Daylight control sensor
 - Motion sensor
 - Daylight control & motion sensor
 - Plenum ventilation behind the louvre
 - GST18i3® connector + BST14i2 connector
 - GST18i5® connector
 - Different RAL colour



21027WA.2830
28w 3000k 3360lm
ηLB 71,4%