

Slank LED inlegarmatuur voor bandraster plafonds. Apollo is een modulair systeem waarbij standaard maten light engine in op maat gemaakte bandrasterbehuizingen worden geassembleerd. Apollo wordt daarom uitsluitend als maatwerkproduct voor projecten geproduceerd. Breedte en lengte van het armatuur wordt aangepast aan het plafond. De met hoog voltage en hoog rendement LED lines en brede bundel (88°). Vervaardigd uit wit gelakt (RAL 9003) plaatstaal. Hoogglans aluminium Miro reflector met lage verblinding (UGR<17) en brede uitstralingshoek >92°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen en andere werkrumtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Slim recessed LED luminaire for metal grid ceilings. Apollo is a modular system where standard sized light engines are fitted into customized luminaire housings. Apollo is a product that is made specifically for each project. The length and width of the housing are made to fit each ceiling type. High voltage and high efficiency LED lines and wide beam angle (88°). Housing made of white painted (RAL 9003) sheet metal. With specular aluminum Miro louvre with low glare (UGR<17) and wide beam angle >92°. Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.



Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali	EasySense EasySense
15w	3000k	1685	>80	1195	147	4	1/3	21025WA.15.30	21025WA.15.32	21025WA.15.37
24w	3000k	2696	>80	1195	147	4	1/3	21025WA.24.30	21025WA.24.32	21025WA.24.37
29w	3000k	3257	>80	1195	147	4	1/3	21025WA.29.30	21025WA.29.32	21025WA.29.37
18w	3000k	2022	>80	1495	147	5	1/3	21025WB.18.30	21025WB.18.32	21025WB.18.37
27w	3000k	3033	>80	1495	147	5	1/3	21025WB.27.30	21025WB.27.32	21025WB.27.37
40w	3000k	4493	>80	1495	147	5	1/3	21025WB.40.30	21025WB.40.32	21025WB.40.37
50w	3000k	5616	>80	1495	147	5	1/3	21025WB.50.30	21025WB.50.32	21025WB.50.37
18w	3000k	2022	>80	1720	147	5,5	1/3	21025WC.18.30	21025WC.18.32	21025WC.18.37
27w	3000k	3033	>80	1720	147	5,5	1/3	21025WC.27.30	21025WC.27.32	21025WC.27.37
40w	3000k	4493	>80	1720	147	5,5	1/3	21025WC.40.30	21025WC.40.32	21025WC.40.37
50w	3000k	5616	>80	1720	147	5,5	1/3	21025WC.50.30	21025WC.50.32	21025WC.50.37
15w	4000k	1755	>80	1195	147	4	1/3	21025WA.15.40	21025WA.15.42	21025WA.15.47
24w	4000k	2808	>80	1195	147	4	1/3	21025WA.24.40	21025WA.24.42	21025WA.24.47
29w	4000k	3393	>80	1195	147	4	1/3	21025WA.29.40	21025WA.29.42	21025WA.29.47
18w	4000k	2106	>80	1495	147	5	1/3	21025WB.18.40	21025WB.18.42	21025WB.18.47
27w	4000k	3159	>80	1495	147	5	1/3	21025WB.27.40	21025WB.27.42	21025WB.27.47
40w	4000k	4680	>80	1495	147	5	1/3	21025WB.40.40	21025WB.40.42	21025WB.40.47
50w	4000k	5850	>80	1495	147	5	1/3	21025WB.50.40	21025WB.50.42	21025WB.50.47
18w	4000k	2106	>80	1720	147	5,5	1/3	21025WC.18.40	21025WC.18.42	21025WC.18.47
27w	4000k	3159	>80	1720	147	5,5	1/3	21025WC.27.40	21025WC.27.42	21025WC.27.47
40w	4000k	4680	>80	1720	147	5,5	1/3	21025WC.40.40	21025WC.40.42	21025WC.40.47
50w	4000k	5850	>80	1720	147	5,5	1/3	21025WC.50.40	21025WC.50.42	21025WC.50.47

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%


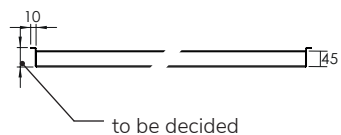


### Toelichting:

Buitenmaat = maatwerk

### Illustration:

Customized outersize

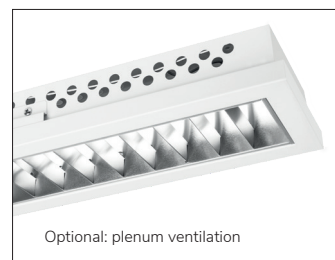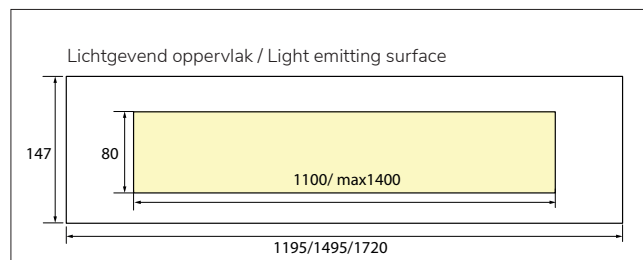


### Opties:

- Daglichtregeling
- Bewegingsmelder
- Daglichtregeling & bewegingssensor
- Plenum ventilatie achter het louvre
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

### Optional:

- Daylight control sensor
- Motion sensor
- Daylight control & motion sensor
- Plenum ventilation behind the louvre
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Different RAL colour



### 21025WA.15.30

15w 3000k 1685lm  
ηLB 71,4%