




Decoratief opbouw armatuur met hoog armatuur rendement (>125lm/w). Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Aanstuurbaar via Dali DT8 of Casambi. Directe verlichting via opaal en micro prisma afscherming. Brede uitstralingshoek (>100°) en zeer lage verblinding (UGR<19). Hierdoor zeer goed toepasbaar in gangen, kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Surface mounted luminaire with high luminaire efficiency (>125lm/w). Housing made of white painted (RAL 9003) sheet metal. Controllable trough Dali DT8 or Casambi. Direct lighting through opal and micro prisma diffuser. Low glare (UGR <19) and wide beam angle >100°. Very suitable in corridors, offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage Watts	Kleur Colour	Lumen Lumen	CRI (Ra) CRI (Ra)	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
25w	2700-6500k	3125	>80	600	600	65	6	1/3	29680MA.25.TW	29680MA.25.TWC
32w	2700-6500k	4000	>80	600	600	65	6	1/3	29680MA.32.TW	29680MA.32.TWC
38w	2700-6500k	4750	>80	600	600	65	6	1/3	29680MA.38.TW	29680MA.38.TWC
52w	2700-6500k	6500	>80	600	600	65	6	1/3	29680MA.52.TW	29680MA.52.TWC
38w	2700-6500k	4750	>80	300	1200	65	6	1/3	29680MB.38.TW	29680MB.38.TWC
76w	2700-6500k	9500	>80	300	1200	65	6	1/3	29680MB.76.TW	29680MB.76.TWC

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

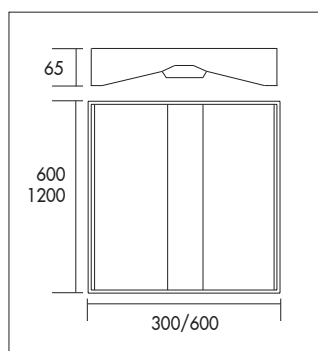

## OPBOUW ARMATUREN SURFACE MOUNTED LUMINAIRES




### Opties:

- Daglichtregeling
- Bewegingsmelder
- Daglichtregeling & bewegingssensor
- EasySense-sensor

### Optional:

- Daylight control sensor
- Motion sensor
- Daylight control & motion sensor
- EasySense-sensor



**29680MA.25.TW**  
25w 2700-6500k 3125lm  
ηLB 100%