Argon Micro Surface

PF>0,95 IP40


Decoratief opbouw armatuur met hoog armatuur rendement (>120lm/w). Vervaardigd uit witgelakt (RAL 9003) plaatstaal. Directe verlichting via opaal en micro prisma afscherming. Brede uitstralingshoek (> 100º) en zeer lage verblinding (UGR<19).Hierdoor zeer goed toepasbaar in gangen, kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Surface mounted luminaire with high luminaire efficiency (>120lm/w). Housing made of white painted (RAL 9003) sheet metal. Direct lighting through opal and micro prisma diffusor. Low glare (UGR <19) and wide beam angle >100º. Very suitable in corridors, offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**CRI (Ra)** *CRI (Ra)*	**B (mm)** *W (mm)*	**L (mm)** *L (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
25w	3000k	2970	>80	600	600	65	6	1/3	29680MA.25.30	29680MA.25.32	29680MA.25.37
32w	3000k	3800	>80	600	600	65	6	1/3	29680MA.32.30	29680MA.32.32	29680MA.32.37
38w	3000k	4510	>80	600	600	65	6	1/3	29680MA.38.30	29680MA.38.32	29680MA.38.37
52w	3000k	6175	>80	600	600	65	6	1/3	29680MA.52.30	29680MA.52.32	29680MA.52.37
38w	3000k	4510	>80	300	1200	65	6	1/3	29680MB.38.30	29680MB.38.32	29680MB.38.37
76w	3000k	9025	>80	300	1200	65	6	1/3	29680MB.76.30	29680MB.76.32	29680MB.76.37
25w	4000k	3125	>80	600	600	65	6	1/3	29680MA.25.40	29680MA.25.42	29680MA.25.47
32w	4000k	4000	>80	600	600	65	6	1/3	29680MA.32.40	29680MA.32.42	29680MA.32.47
38w	4000k	4750	>80	600	600	65	6	1/3	29680MA.38.40	29680MA.38.42	29680MA.38.47
52w	4000k	6500	>80	600	600	65	6	1/3	29680MA.52.40	29680MA.52.42	29680MA.52.47
38w	4000k	4750	>80	300	1200	65	6	1/3	29680MB.38.40	29680MB.38.42	29680MB.38.47
76w	4000k	9500	>80	300	1200	65	6	1/3	29680MB.76.40	29680MB.76.42	29680MB.76.47

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

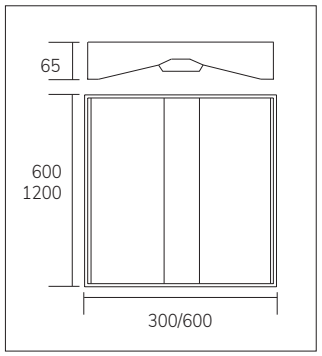


OPBOUW ARMATUREN

SURFACE MOUNTED LUMINAIRES



Opties:
- Daglichtregeling
- Bewegingsmelder
- Daglichtregeling & bewegingssensor
- EasySense-sensor

Optional:
- *Daylight control sensor*
- *Motion sensor*
- *Daylight control & motion sensor*
- *EasySense-sensor*



29680MA.25.30
25w 3000k 2970lm
ηLB 100%

melis lighting