

Atla Opal Eco




Slagvast water- en stofdicht IP65-66 LED armatuur met opalen afscherming (optioneel helder). Zeer hoog armatuur rendement (>132lm/w). Behuizing (uv-bestendig) en diffuser uit PC met PC clips voor sluiting en RVS ophangbeugel. Binnenreflector uit wit gelakt plaatstaal. Onderhoudsarm en hoge levensduurverwachting (70.000 uur L70 Ta. Max.+ 45°C). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie (Ta.Max -15°C).

Impact resistant water- and dust proof IP65-66 luminaire with high voltage LEDs. Housing (uv-resistant) made of PC, opal PC diffuser (optionally clear), polycarbonate clips and stainless steel suspension bracket. Inner reflector plate made of white painted sheet metal. High luminaire efficiency (>132lm/w). Low maintenance and high life expectancy (70.000 hours L70 Ta Max +45°C). Colour stability, Mac Adam <3. Warranty 5 years (Ta.Max -15°C).

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	Clips Clips	Ta.Max Ta.Max	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali
12w	3000k	1425	>80	665	84	99	6	45	1,5		69100A.12.30	69100A.12.32
21w	3000k	2460	>80	665	134	99	6	45	2,0	1/3	69100B.21.30	69100B.21.32
28w	3000k	3590	>80	1275	84	99	8	45	1,8	1/3	69100C.28.30	69100C.28.32
28w	3000k	3590	>80	1275	134	99	8	48	2,9	1/3	69100D.28.30	69100D.28.32
39w	3000k	4930	>80	1275	134	99	8	45	2,9	1/3	69100D.39.30	69100D.39.32
35w	3000k	4350	>80	1575	84	99	10	45	2,2	1/3	69100E.35.30	69100E.35.32
35w	3000k	4350	>80	1575	134	99	10	48	3,8	1/3	69100F.35.30	69100F.35.32
49w	3000k	6165	>80	1575	134	99	10	45	3,8	1/3	69100F.49.30	69100F.49.32
12w	4000k	1500	>80	665	84	99	6	45	1,5		69100A.12.40	69100A.12.42
21w	4000k	2590	>80	665	134	99	6	45	2,0	1/3	69100B.21.40	69100B.21.42
28w	4000k	3780	>80	1275	84	99	8	45	1,8	1/3	69100C.28.40	69100C.28.42
28w	4000k	3780	>80	1275	134	99	8	48	2,9	1/3	69100D.28.40	69100D.28.42
39w	4000k	5190	>80	1275	134	99	8	45	2,9	1/3	69100D.39.40	69100D.39.42
35w	4000k	4575	>80	1575	84	99	10	45	2,2	1/3	69100E.35.40	69100E.35.42
35w	4000k	4575	>80	1575	134	99	10	48	3,8	1/3	69100F.35.40	69100F.35.42
49w	4000k	6490	>80	1575	134	99	10	45	3,8	1/3	69100F.49.40	69100F.49.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

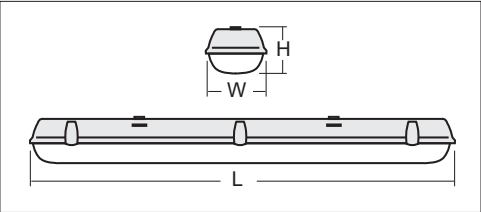

BUITEN VERLICHTING OUTDOOR LIGHTING




Opties:

- PC clips
- IP65 Wieland/Stucchi connector
- 5000k , 6500k
- Doorvoerbedrading
- CRI >90

Optional:

- PC clips
- IP65 Wieland/Stucchi connector
- 5000k, 6500k
- Through-wiring
- CRI >90



69100A.12.30

12w 1425lm 3000k
ηLB 100%

melis lighting