

Atla Opal Extreme





Slagvast water- en stofdicht IP65 LED armatuur met opalen afscherming (optioneel helder) voor extreme omstandigheden. Speciaal voor de landbouwindustrie om zijn hoge bescherming tegen agressief ammoniakgas in boerderijen. Zeer hoog armatuur rendement (>118lm/w). Glasvezelversterkte, uv-bestendige behuizing (polyester) en diffuser uit PC met RVS clips voor sluiting en RVS ophangbeugel. Binnenreflector uit wit gelakt plaatstaal. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10) of (65.000 uur L70 Ta. Max.+ 45°C). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie (Ta.Max -20°C). Optioneel speciale “vries” versie met hogere kwaliteit bekabeling en driver (Ta Max. -30°C).

Impact resistant water- and dust proof IP65 luminaire with high voltage LEDs for extreme environments. Special for the farming industry providing high protection against aggressive ammonia gas in farmhouses. Fiberglass reinforced polyester, uv-resistant housing, frosted PC diffuser. 2-part stainless steel clips with securing screws and stainless steel suspension bracket. Inner reflector plate made of white painted sheet metal. High luminaire efficiency (>118lm/w). Low maintenance and high life expectancy (50.000 hours L90B10) or (65.000 hours L70 Ta Max +45°C). Colour stability, Mac Adam <3. Warranty 5 years (Ta.Max -20°C). Optionally special “fridge” version with higher grade driver and wiring for Ta Max. -30°C.



Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	Clips Clips	Ta.Max Ta.Max	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali
13w	3000k	1860	>80	702	102	105	6	35	2,0	1/3	69568AX.13.30	69568AX.13.32
17w	3000k	2565	>80	1312	102	105	8	35	2,9	1/3	69568BX.17.30	69568BX.17.32
25w	3000k	3840	>80	1312	102	105	8	40	2,9	1/3	69568BX.27.30	69568BX.27.32
35w	3000k	5215	>80	1312	102	105	8	40	2,9	1/3	69568BX35.30	69568BX.35.32
20w	3000k	2765	>80	1612	102	105	10	35	3,6	1/3	69568CX.20.30	69568CX.20.32
31w	3000k	4800	>80	1612	102	105	10	40	3,6	1/3	69568CX.31.30	69568CX.31.32
13w	3000k	1865	>80	702	172	105	6	53	2,2	1/3	69568DX.13.30	69568DX.13.32
17w	3000k	2055	>80	702	172	105	6	53	2,2	1/3	69568DX.17.30	69568DX.17.32
23w	3000k	2890	>80	702	172	105	6	40	2,2	1/3	69568DX.23.30	69568DX.23.32
25w	3000k	3840	>80	1312	172	105	8	53	3,8	1/3	69568EX.25.30	69568EX.25.32
30w	3000k	4115	>80	1312	172	105	8	53	3,8	1/3	69568EX.30.30	69568EX.30.32
35w	3000k	5215	>80	1312	172	105	8	53	3,8	1/3	69568EX.35.30	69568EX.35.32
45w	3000k	5775	>80	1312	172	105	8	40	3,8	1/3	69568EX.45.30	69568EX.45.32
31w	3000k	4800	>80	1612	172	105	10	53	4,8	1/3	69568FX.31.30	69568FX.31.32
37w	3000k	5150	>80	1612	172	105	10	53	4,8	1/3	69568FX.37.30	69568FX.37.32
44w	3000k	6515	>80	1612	172	105	10	53	4,8	1/3	69568FX.44.30	69568FX.44.32
53w	3000k	7220	>80	1612	172	105	10	40	4,8	1/3	69568FX.53.30	69568FX.53.32
60w	3000k	8295	>80	1612	172	105	10	40	4,8	1/3	69568FX.60.30	69568FX.60.32
66w	3000k	8410	>80	1612	172	105	10	37	4,8	1/3	69568FX.66.30	69568FX.66.32
76w	3000k	9785	>80	1612	172	105	10	30	4,8	1/3	69568FX.76.30	69568FX.76.32
78w	3000k	10.610	>80	1612	172	105	10	30	4,8	1/3	69568FX.78.30	69568FX.78.32
82w	3000k	11.400	>80	1612	172	105	10	35	4,8	1/3	69568FX.82.30	69568FX.82.32
92w	3000k	13.015	>80	1612	172	105	10	30	4,8	1/3	69568FX.92.30	69568FX.92.32
104w	3000k	13.300	>80	1612	172	105	10	25	4,8	1/3	69568FX.104.30	69568FX.104.32

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

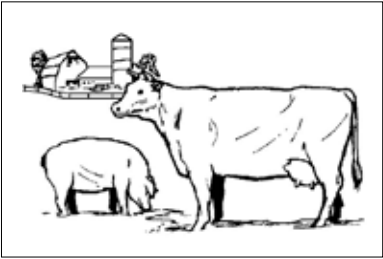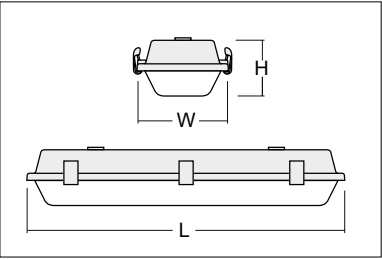

BUITEN VERLICHTING OUTDOOR LIGHTING

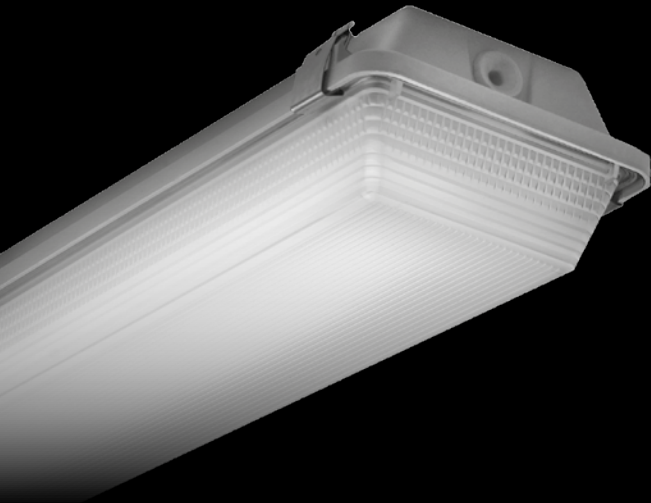

69568AX.13.30
13w 1960lm 3000k
ηLB 100%

melis lighting

Atla Opal Extreme


BUITEN VERLICHTING OUTDOOR LIGHTING

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Breedte (mm) Width (mm)	Hoogte (mm) Height (mm)	Clips Clips	Ta.Max Ta.Max	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali
13w	4000k	1960	>80	702	102	105	6	35	2,0	1/3	69568AX.13.40	69568AX.13.42
17w	4000k	2700	>80	1312	102	105	8	35	2,9	1/3	69568BX.17.40	69568BX.17.42
25w	4000k	4040	>80	1312	102	105	8	40	2,9	1/3	69568BX.27.40	69568BX.27.42
35w	4000k	5490	>80	1312	102	105	8	40	2,9	1/3	69568BX35.40	69568BX.35.42
20w	4000k	2940	>80	1612	102	105	10	35	3,6	1/3	69568CX.20.40	69568CX.20.42
31w	4000k	5050	>80	1612	102	105	10	40	3,6	1/3	69568CX.31.40	69568CX.31.42
13w	4000k	1960	>80	702	172	105	6	53	2,2	1/3	69568DX.13.40	69568DX.13.42
17w	4000k	2165	>80	702	172	105	6	53	2,2	1/3	69568DX.17.40	69568DX.17.42
23w	4000k	3040	>80	702	172	105	6	40	2,2	1/3	69568DX.23.40	69568DX.23.42
25w	4000k	4040	>80	1312	172	105	8	53	3,8	1/3	69568EX.25.40	69568EX.25.42
30w	4000k	4330	>80	1312	172	105	8	53	3,8	1/3	69568EX.30.40	69568EX.30.42
35w	4000k	5490	>80	1312	172	105	8	53	3,8	1/3	69568EX.35.40	69568EX.35.42
45w	4000k	6080	>80	1312	172	105	8	40	3,8	1/3	69568EX.45.40	69568EX.45.42
31w	4000k	5050	>80	1612	172	105	10	53	4,8	1/3	69568FX.31.40	69568FX.31.42
37w	4000k	5420	>80	1612	172	105	10	53	4,8	1/3	69568FX.37.40	69568FX.37.42
44w	4000k	5860	>80	1612	172	105	10	53	4,8	1/3	69568FX.44.40	69568FX.44.42
53w	4000k	7600	>80	1612	172	105	10	40	4,8	1/3	69568FX.53.40	69568FX.53.42
60w	4000k	8730	>80	1612	172	105	10	40	4,8	1/3	69568FX.60.40	69568FX.60.42
66w	4000k	8850	>80	1612	172	105	10	37	4,8	1/3	69568FX.66.40	69568FX.66.42
76w	4000k	10.300	>80	1612	172	105	10	30	4,8	1/3	69568FX.76.40	69568FX.76.42
78w	4000k	11.170	>80	1612	172	105	10	30	4,8	1/3	69568FX.78.40	69568FX.78.42
82w	4000k	12.000	>80	1612	172	105	10	35	4,8	1/3	69568FX.82.40	69568FX.82.42
92w	4000k	13.700	>80	1612	172	105	10	30	4,8	1/3	69568FX.92.40	69568FX.92.42
104w	4000k	14.000	>80	1612	172	105	10	25	4,8	1/3	69568FX.104.40	69568FX.104.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%



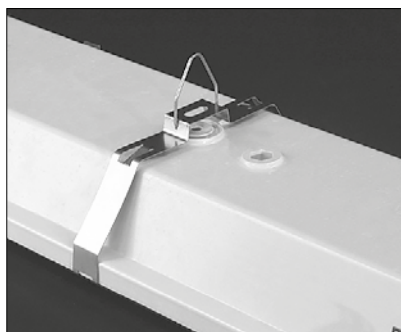

Ophang beugel / suspension bracket

smal/narrow 69568.beugel.1

breed/wide 69568.beugel.2

Opties:

- PC clips
- IP65 Wieland/Stucchi connector
- 5000k, 6500k
- Bewegingssensor (niet voor 655mm)
- Doorvoerbedrading
- CRI>90
- Speciale 'vries' versie
- Speciale amoniak bestendige behuizing

Optional:

- PC clips
- IP65 Wieland/Stucchi connector
- 5000k, 6500k
- Motion sensor (not for 665mm)
- Through-wiring
- CRI>90
- Special 'fridge' version
- Special amonia resistant housing