

Decoratief opbouw armatuur met afgeronde hoeken en hoog rendement LED technologie (>115lm/w). Vervaardigd uit witgelakt (RAL 9003) plaatstaal met "easy click" sluiting voor snel montage van diffuser. Verkrijgbaar met opalen (UGR<22) of micro prisma (UR<19) afscherming met brede uitstralingshoek >95°. Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B50). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Decorative surface mounted luminaire with bevelled edges and high efficiency LED technology (>115lm/w). Housing made of white painted (RAL 9003) sheet metal with "easy click" diffuser closing mechanism. Opal (UGR<22) or micro prism diffuser (UGR<19) with wide beam angle >95°. Very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (50.000 hours L90B50). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / Micro Prism


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	B (mm) W (mm)	L (mm) L (mm)	H (mm) H (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali	EasySense EasySense
17w	3000k	1572	>80	310	615	60	4	1/3	29524M.E17.30	29524M.E17.32	29524M.E17.37
27w	3000k	2447	>80	310	615	60	4	1/3	29524M.E27.30	29524M.E27.32	29524M.E27.37
32w	3000k	3261	>80	615	615	60	6,5	1/3	29524M.A32.30	29524M.A32.32	29524M.A32.37
53w	3000k	5405	>80	615	615	60	6,5	1/3	29524M.A53.30	29524M.A53.32	29524M.A53.37
32w	3000k	2791	>80	310	1285	60	6,5	1/3	29524M.C32.30	29524M.C32.32	29524M.C32.37
53w	3000k	4626	>80	310	1285	60	6,5	1/3	29524M.C53.30	29524M.C53.32	29524M.C53.37
64w	3000k	6205	>80	615	1285	60	9	1/3	29524M.B64.30	29524M.B64.32	29524M.B64.37
106w	3000k	10.977	>80	615	1285	60	9	1/3	29524M.B106.30	29524M.B106.32	29524M.B106.37
40w	3000k	3488	>80	310	1565	60	7,5	1/3	29524M.D40.30	29524M.D40.32	29524M.D40.37
54w	3000k	5290	>80	310	1565	60	7,5	1/3	29524M.D54.30	29524M.D54.32	29524M.D54.37
17w	4000k	1654	>80	310	615	60	4	1/3	29524M.E17.40	29524M.E17.42	29524M.E17.47
27w	4000k	2576	>80	310	615	60	4	1/3	29524M.E27.40	29524M.E27.42	29524M.E27.47
32w	4000k	3433	>80	615	615	60	6,5	1/3	29524M.A32.40	29524M.A32.42	29524M.A32.47
53w	4000k	5689	>80	615	615	60	6,5	1/3	29524M.A53.40	29524M.A53.42	29524M.A53.47
32w	4000k	2938	>80	310	1285	60	6,5	1/3	29524M.C32.40	29524M.C32.42	29524M.C32.47
53w	4000k	4869	>80	310	1285	60	6,5	1/3	29524M.C53.40	29524M.C53.42	29524M.C53.47
64w	4000k	6531	>80	615	1285	60	9	1/3	29524M.B64.40	29524M.B64.42	29524M.B64.47
106w	4000k	11.555	>80	615	1285	60	9	1/3	29524M.B106.40	29524M.B106.42	29524M.B106.47
40w	4000k	3672	>80	310	1565	60	7,5	1/3	29524M.D40.40	29524M.D40.42	29524M.D40.47
54w	4000k	5568	>80	310	1565	60	7,5	1/3	29524M.D54.40	29524M.D54.42	29524M.D54.47

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%



OPBOUW ARMATUREN
SURFACE MOUNTED LUMINAIRES

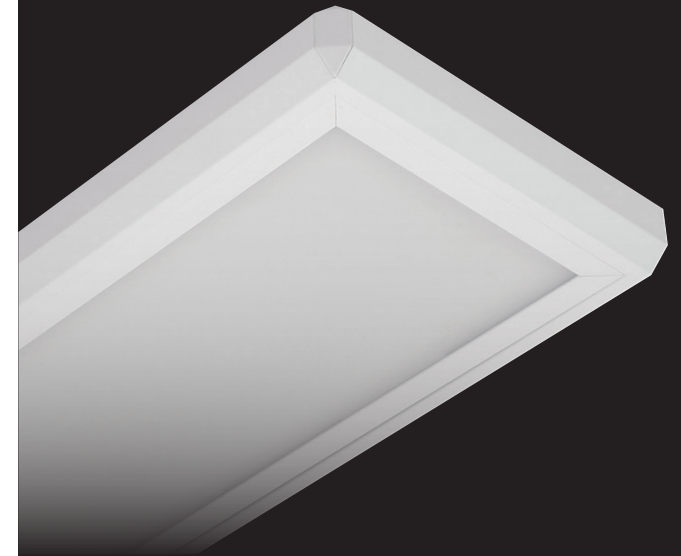


Opties:

- Daglicht en bewegingsregeling ingebouwd in de diffuser
- EasySense Sensor
- 6500k
- CRI > 90

Options:

- Daylight and motion control sensor build into the diffuser
- EasySense Sensor
- 6500k
- CRI > 90



29524M.E17.30
17w 3000k 1572lm
ηLB 100%

Opaal / Opal

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	B (mm) W (mm)	L (mm) L (mm)	H (mm) H (mm)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali	EasySense EasySense
17w	3000k	1965	>80	310	615	60	4	1/3	29524OP.E17.30	29524OP.E17.32	29524OP.E17.37
27w	3000k	3059	>80	310	615	60	4	1/3	29524OP.E27.30	29524OP.E27.32	29524OP.E27.37
32w	3000k	3953	>80	615	615	60	6,5	1/3	29524OP.A32.30	29524OP.A32.32	29524OP.A32.37
53w	3000k	6551	>80	615	615	60	6,5	1/3	29524OP.A53.30	29524OP.A53.32	29524OP.A53.37
32w	3000k	3383	>80	310	1285	60	6,5	1/3	29524OP.C32.30	29524OP.C32.32	29524OP.C32.37
53w	3000k	5607	>80	310	1285	60	6,5	1/3	29524OP.C53.30	29524OP.C53.32	29524OP.C53.37
64w	3000k	7521	>80	615	1285	60	9	1/3	29524OP.B64.30	29524OP.B64.32	29524OP.B64.37
106w	3000k	13.307	>80	615	1285	60	9	1/3	29524OP.B106.30	29524OPB106.32	29524OP.B106.37
40w	3000k	4228	>80	310	1565	60	7,5	1/3	29524OP.D40.30	29524OP.D40.32	29524OP.D40.37
54w	3000k	6412	>80	310	1565	60	7,5	1/3	29524OP.D54.30	29524OP.D54.32	29524OP.D54.37
17w	4000k	2068	>80	310	615	60	4	1/3	29524OP.E17.40	29524OP.E17.42	29524OP.E17.47
27w	4000k	3220	>80	310	615	60	4	1/3	29524OP.E27.40	29524OP.E27.42	29524OP.E27.47
32w	4000k	4161	>80	615	615	60	6,5	1/3	29524OP.A32.40	29524OP.A32.42	29524OP.A32.47
53w	4000k	6896	>80	615	615	60	6,5	1/3	29524OP.A53.40	29524OP.A53.42	29524OP.A53.47
32w	4000k	3561	>80	310	1285	60	6,5	1/3	29524OP.C32.40	29524OP.C32.42	29524OP.C32.47
53w	4000k	5902	>80	310	1285	60	6,5	1/3	29524OP.C53.40	29524OP.C53.42	29524OP.C53.47
64w	4000k	7917	>80	615	1285	60	9	1/3	29524OP.B64.40	29524OP.B64.42	29524OP.B64.47
106w	4000k	14.007	>80	615	1285	60	9	1/3	29524OP.B106.40	29524OPB106.42	29524OP.B106.47
40w	4000k	4451	>80	310	1565	60	7,5	1/3	29524OP.D40.40	29524OP.D40.42	29524OP.D40.47
54w	4000k	6749	>80	310	1565	60	7,5	1/3	29524OP.D54.40	29524OP.D54.42	29524OP.D54.47

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

