

Box Tilt Focus BLACK



Vierkante box met ronde kantelbare LED downlight voor krachtige accentverlichting. 350° draaibaar en 25° kantelbaar. Gefacetteerde hoogglans 99,98% aluminium reflector met helder gehard glazen afscherming en decoratieve sierrand voor lage verblinding (UGR<19). Dankzij een modulaire ring kunnen verschillende accessoires op de Aron geklikt worden. Hierdoor zeer geschikt als accent verlichting in hotels en winkels. Verkrijgbaar in RAL9003 (wit) en RAL 9005 (zwart). Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Square shaped box with round tiltable LED for powerful accent lighting. Rotates through 350° and pivots through 25°. Facetted glossy 99,98% aluminium reflector with clear hardened glass shielding and decorative trim for low glare (UGR<19). Onto the modular die cast aluminium trim several accessories can be clicked making it very suitable as spot light in shops, hotels and restaurants. Standard available in RAL9003 (white) or RAL 9005 (black). Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Five years warranty.



Behuizing (excl. lichtbron) Housing (excl. light source)	Gewicht (kg) Weight (kg)	Artikelnr. Article number
1-lamp black	1,7	26005B.200
2-lamp black	2,6	26005B.400

LICHTBRON (ARON) / LIGHTSOURCE (ARON)

Wattage Watts	Kleur Colour	Lumen Lumen	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr.* Article no.*	1-10V 1-10V	Dali Dali
9w	3000k	1150	>80	20°	1,6	20042FB.0920.30	20042FB.0920.31	20042FB.0920.32
12w	3000k	1565	>80	20°	1,6	20042FB.1220.30	20042FB.1220.31	20042FB.1220.32
18w	3000k	2150	>80	20°	1,6	20042FB.1820.30	20042FB.1820.31	20042FB.1820.32
25w	3000k	2900	>80	20°	1,6	20042FB.2520.30	20042FB.2520.31	20042FB.2520.32
33w	3000k	3585	>80	20°	1,6	20042FB.3320.30	20042FB.3320.31	20042FB.3320.32
39w	3000k	4070	>80	20°	1,6	20042FB.3920.30	20042FB.3920.31	20042FB.3920.32
9w	3000k	1150	>80	40°	1,6	20042FB.0940.30	20042FB.0940.31	20042FB.0940.32
12w	3000k	1565	>80	40°	1,6	20042FB.1240.30	20042FB.1240.31	20042FB.1240.32
18w	3000k	2150	>80	40°	1,6	20042FB.1840.30	20042FB.1840.31	20042FB.1840.32
25w	3000k	2900	>80	40°	1,6	20042FB.2540.30	20042FB.2540.31	20042FB.2540.32
33w	3000k	3585	>80	40°	1,6	20042FB.3340.30	20042FB.3340.31	20042FB.3340.32
39w	3000k	4070	>80	40°	1,6	20042FB.3940.30	20042FB.3940.31	20042FB.3940.32
9w	4000k	1210	>80	20°	1,6	20042FB.0920.40	20042FB.0920.41	20042FB.0920.42
12w	4000k	1650	>80	20°	1,6	20042FB.1220.40	20042FB.1220.41	20042FB.1220.42
18w	4000k	2260	>80	20°	1,6	20042FB.1820.40	20042FB.1820.41	20042FB.1820.42
25w	4000k	3045	>80	20°	1,6	20042FB.2520.40	20042FB.2520.41	20042FB.2520.42
33w	4000k	3765	>80	20°	1,6	20042FB.3320.40	20042FB.3320.41	20042FB.3320.42
39w	4000k	4285	>80	20°	1,6	20042FB.3920.40	20042FB.3920.41	20042FB.3920.42
9w	4000k	1210	>80	40°	1,6	20042FB.0940.40	20042FB.0940.41	20042FB.0940.42
12w	4000k	1650	>80	40°	1,6	20042FB.1240.40	20042FB.1240.41	20042FB.1240.42
18w	4000k	2260	>80	40°	1,6	20042FB.1840.40	20042FB.1840.41	20042FB.1840.42
25w	4000k	3045	>80	40°	1,6	20042FB.2540.40	20042FB.2540.41	20042FB.2540.42
33w	4000k	3765	>80	40°	1,6	20042FB.3340.40	20042FB.3340.41	20042FB.3340.42
39w	4000k	4285	>80	40°	1,6	20042FB.3940.40	20042FB.3940.41	20042FB.3940.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

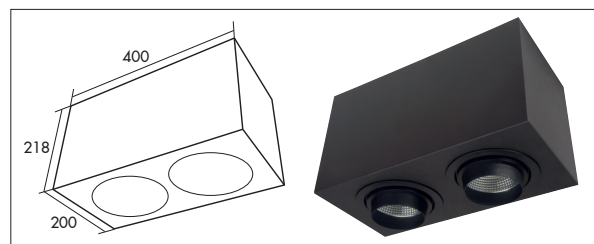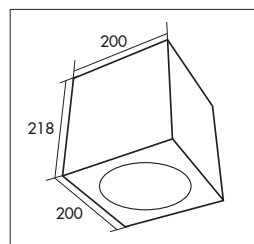

OPBOUW DOWNLIGHTS SURFACE MOUNTED DOWNLIGHTS




Opties:

- 2700K, 3500k, 5000k of hogere CRI waarde 90/97

Options:

- 2700k, 3500k, 5000k or higher CRI values 90/97



20042FB.2540.30
25w 3000k 40° 2900lm
ηLB 72%