Box Tilt Striped BLACK

Vierkante box met ronde kantelbare LED downlight voor krachtige accentverlichting. 350° draaibaar en 25° kantelbaar. Gefacetteerde hoogglans 99,98% aluminium reflector met helder gehard glazen afscherming met lineaire gravering voor ovale lichtbundel. Dankzij een modulaire ring kunnen verschillende accessoires op de Aron geklikt worden. Hierdoor zeer geschikt als accent verlichting in hotels en winkels. Verkrijgbaar in RAL 9003 (wit) en RAL 9005 (zwart). Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Square shaped box with round tiltable LED for powerful accent lighting. Rotates through 350° and pivots through 25°. Facetted glossy 99,98% aluminium reflector with clear hardened glass shielding with linear engraving for oval beam. Onto the modular die cast aluminium trim several accessories can be clicked making it very suitable as spot light in shops, hotels and restaurants. Standard available in RAL 9003 (white) or RAL 9005 (black). Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Five years warranty.


Behuizing (excl. lichtbron) *Housing (excl. light source)*	**Gewicht (kg)** *Weight (kg)*	**Artikelnr.** *Article number*
1-lamp black	1,7	26005B.200
2-lamp black	2,6	26005B.400

LICHTBRON (ARON) / *LIGHTSOURCE (ARON)*


Wattage *Watts*	**Kleur** *Colour*	**Lumen** *Lumen*	**CRI** *CRI*	**Graden** *Degree*	**Gewicht (kg)** *Weight (kg)*	**Artikel nr.*** *Article no.**	**1-10V** *1-10V*	**Dali** *Dali*
9w	3000k	1025	>80	20°	1,6	20042SB.0920.30	20042SB.0920.31	20042SB.0920.32
12w	3000k	1390	>80	20°	1,6	20042SB.1220.30	20042SB.1220.31	20042SB.1220.32
18w	3000k	1915	>80	20°	1,6	20042SB.1820.30	20042SB.1820.31	20042SB.1820.32
25w	3000k	2575	>80	20°	1,6	20042SB.2520.30	20042SB.2520.31	20042SB.2520.32
33w	3000k	3185	>80	20°	1,6	20042SB.3320.30	20042SB.3320.31	20042SB.3320.32
39w	3000k	3615	>80	20°	1,6	20042SB.3920.30	20042SB.3920.31	20042SB.3920.32
9w	3000k	1025	>80	40°	1,6	20042SB.0940.30	20042SB.0940.31	20042SB.0940.32
12w	3000k	1390	>80	40°	1,6	20042SB.1240.30	20042SB.1240.31	20042SB.1240.32
18w	3000k	1915	>80	40°	1,6	20042SB.1840.30	20042SB.1840.31	20042SB.1840.32
25w	3000k	2575	>80	40°	1,6	20042SB.2540.30	20042SB.2540.31	20042SB.2540.32
33w	3000k	3185	>80	40°	1,6	20042SB.3340.30	20042SB.3340.31	20042SB.3340.32
39w	3000k	3615	>80	40°	1,6	20042SB.3940.30	20042SB.3940.31	20042SB.3940.32
9w	4000k	1075	>80	20°	1,6	20042SB.0920.40	20042SB.0920.41	20042SB.0920.42
12w	4000k	1465	>80	20°	1,6	20042SB.1220.40	20042SB.1220.41	20042SB.1220.42
18w	4000k	2010	>80	20°	1,6	20042SB.1820.40	20042SB.1820.41	20042SB.1820.42
25w	4000k	2710	>80	20°	1,6	20042SB.2520.40	20042SB.2520.41	20042SB.2520.42
33w	4000k	3350	>80	20°	1,6	20042SB.3320.40	20042SB.3320.41	20042SB.3320.42
39w	4000k	3810	>80	20°	1,6	20042SB.3920.40	20042SB.3920.41	20042SB.3920.42
9w	4000k	1075	>80	40°	1,6	20042SB.0940.40	20042SB.0940.41	20042SB.0940.42
12w	4000k	1465	>80	40°	1,6	20042SB.1240.40	20042SB.1240.41	20042SB.1240.42
18w	4000k	2010	>80	40°	1,6	20042SB.1840.40	20042SB.1840.41	20042SB.1840.42
25w	4000k	2710	>80	40°	1,6	20042SB.2540.40	20042SB.2540.41	20042SB.2540.42
33w	4000k	3350	>80	40°	1,6	20042SB.3340.40	20042SB.3340.41	20042SB.3340.42
39w	4000k	3810	>80	40°	1,6	20042SB.3940.40	20042SB.3940.41	20042SB.3940.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*





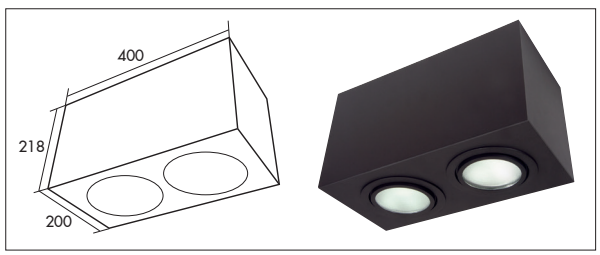


OPBOUW DOWNLIGHTS

SURFACE MOUNTED DOWNLIGHTS



Opties:
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97

Options:
- *2700k, 3500k, 5000k or higher CRI values 90/97*



20042SB.2540.30
25w 3000k 40° 2575lm
ηLB 64%

melis lighting