









Extreem lage inbouw LED downlight (27mm) met wit gelakte aluminium behuizing (RAL 9003). Zeer hoge kwaliteit LED's met hoge kleurweergave (CRI>80). Speciale combinatie PMMA diffusers voor egale lichtverdeling met 115° uitstralingshoek. Standaard instelbaar 3000-5500k. Zeer goed toepasbaar in hallen, trappenhuizen en ruimtes met weinig inbouw ruimte. Wordt geleverd inclusief externe driver (**instelbare kleur + GST18i3 kabel**). Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <2. Vijf jaar garantie.

Extremely shallow recessed LED downlight (27mm) white painted aluminium housing (RAL 9003). Very high quality LEDs with high colour rendering (CRI>80). Due to a special combination of PMMA diffusers the light distributions is very even and has a 115° beam angle. Adjustable 3000–5500K (standard). Very suitable in toilets, corridors, stairways and rooms with limited build-in height. Delivered including external driver (**adjustable color + GST18i3 cable**). Direct connection to 220-240VAC. Fast and easy mounting with springs. Low maintenance and high life expectancy (50.000 hours L80B10). Color stability, Mac Adam <2. Five years warranty.

Wattage	Kleur	Max mA	Max Lumen*	Diameter (mm)	Zaagmaat	Hoogte(mm)	kg	Artikelnr.	Dali-2	Casambi
Wattage	Colour	Max mA	Max Lumen*	Diameter (mm)	Cutsizes	Height(mm)	kg	Article number	Dali-2	Casambi
9w	3000/4000/5500k	275	880-970	120	100	27	0,12	61649W.A.09.0	61649W.A.09.2	61649W.A.09.5
13w	3000/4000/5500k	375	1500-1610	170	150	27	0,21	61649W.B.13.0	61649W.B.13.2	61649W.B.13.5
18w	3000/4000/5500k	500	2000-2160	220	200	27	0,33	61649W.C.18.0	61649W.C.18.2	61649W.C.18.5

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

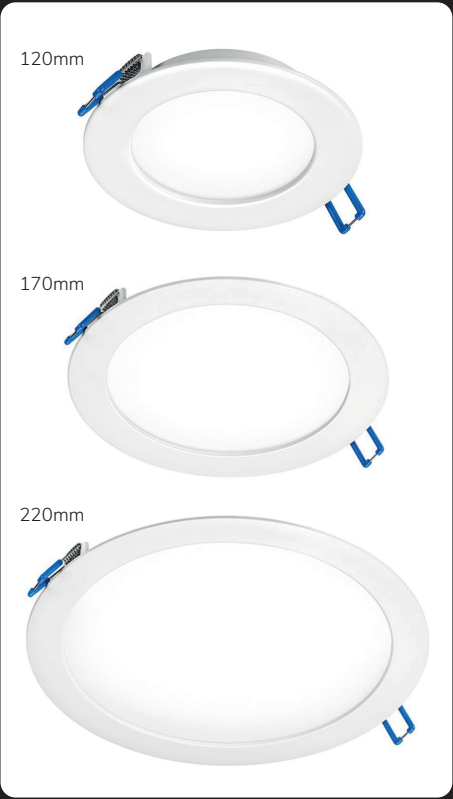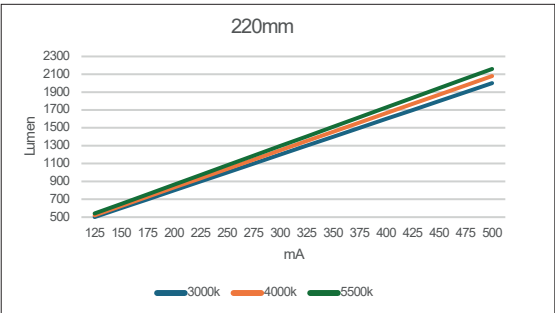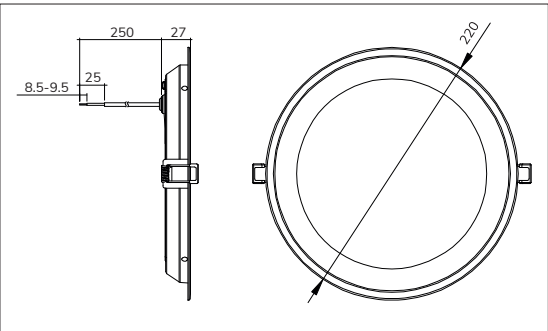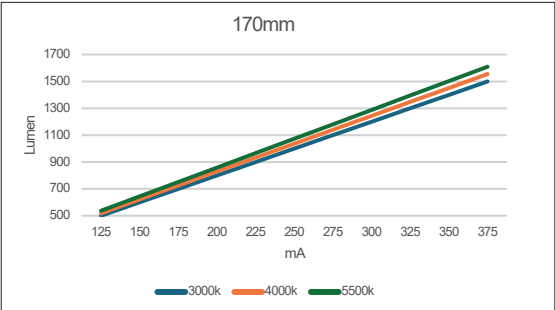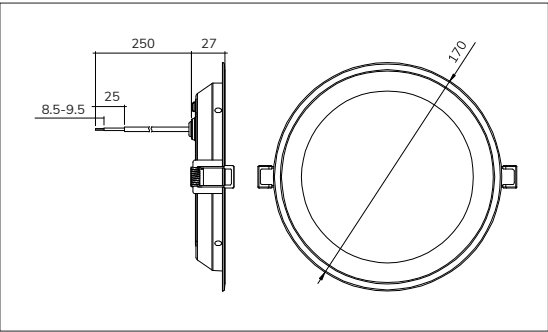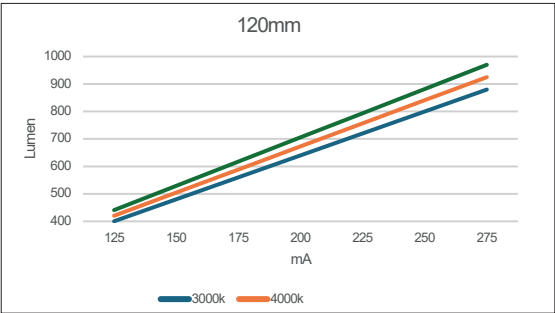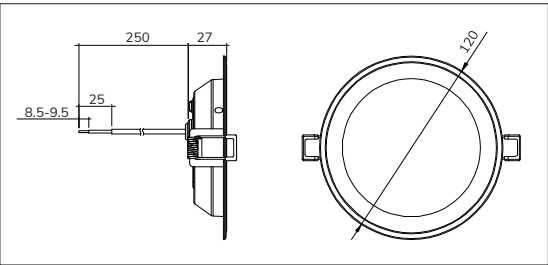

61649W.A.09.0
9W 3000/4000/5500K 880-970lm
ηLB 100%