

# Colombo 186 BLACK




Ronde kardanische LED spot voor krachtige accent- of basisverlichting. 350° draaibaar en 30° kantelbaar. Voorzien van LED met hoge lichtopbrengst (max. 141lm/w). Gefacetteerde hoogglans 99,98% aluminium reflector met helder gehard glazen afscherming. Zwart (RAL 9005) gelakte gegoten aluminium behuizing. Geschikt als spot verlichting in winkels. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Snelle en eenvoudige montage met veren. Vijf jaar garantie.

Round cardanic LED spot light for powerful general or accent lighting. Rotates through 350° and pivots through 30°. With high efficiency LED (max. 141lm/w). Facetted glossy 99,98% aluminium reflector with clear tempered glass diffuser. very suitable as spot light in shops. Standard available in white (RAL9003) or black (RAL 9005). Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	1-10V 1-10V	Dali Dali
18w	3000k	2425	>80	20°	1,4	1/3	20046B.18.20.30	20046B.18.20.31	20046B.18.20.32
25w	3000k	3260	>80	20°	1,4	1/3	20046B.25.20.30	20046B.25.20.31	20046B.25.20.32
33w	3000k	4030	>80	20°	1,4	1/3	20046B.33.20.30	20046B.33.20.31	20046B.33.20.32
39w	3000k	4580	>80	20°	1,4	1/3	20046B.39.20.30	20046B.39.20.31	20046B.39.20.32
45w	3000k	5100	>80	20°	1,4	1/3	20046B.45.20.30	20046B.45.20.31	20046B.45.20.32
54w	3000k	5760	>80	20°	1,4	1/3	20046B.54.20.30		20046B.54.20.32
18w	3000k	2575	>80	40°	1,4	1/3	20046B.18.40.30	20046B.18.40.31	20046B.18.40.32
25w	3000k	3460	>80	40°	1,4	1/3	20046B.25.40.30	20046B.25.40.31	20046B.25.40.32
33w	3000k	4280	>80	40°	1,4	1/3	20046B.33.40.30	20046B.33.40.31	20046B.33.40.32
39w	3000k	4860	>80	40°	1,4	1/3	20046B.39.40.30	20046B.39.40.31	20046B.39.40.32
45w	3000k	5420	>80	40°	1,4	1/3	20046B.45.40.30	20046B.45.40.31	20046B.45.40.32
54w	3000k	6115	>80	40°	1,4	1/3	20046B.54.40.30		20046B.54.40.32
18w	3000k	2400	>80	60°	1,4	1/3	20046B.18.60.30	20046B.18.60.31	20046B.18.60.32
25w	3000k	3220	>80	60°	1,4	1/3	20046B.25.60.30	20046B.25.60.31	20046B.25.60.32
33w	3000k	3980	>80	60°	1,4	1/3	20046B.33.60.30	20046B.33.60.31	20046B.33.60.32
39w	3000k	4520	>80	60°	1,4	1/3	20046B.39.60.30	20046B.39.60.31	20046B.39.60.32
45w	3000k	5040	>80	60°	1,4	1/3	20046B.45.60.30	20046B.45.60.31	20046B.45.60.32
54w	3000k	5690	>80	60°	1,4	1/3	20046B.54.60.30		20046B.54.60.32
18w	4000k	2545	>80	20°	1,4	1/3	20046B.18.20.40	20046B.18.20.41	20046B.18.20.42
25w	4000k	3425	>80	20°	1,4	1/3	20046B.25.20.40	20046B.25.20.41	20046B.25.20.42
33w	4000k	4240	>80	20°	1,4	1/3	20046B.33.20.40	20046B.33.20.41	20046B.33.20.42
39w	4000k	4820	>80	20°	1,4	1/3	20046B.39.20.40	20046B.39.20.41	20046B.39.20.42
45w	4000k	5380	>80	20°	1,4	1/3	20046B.45.20.40	20046B.45.20.41	20046B.45.20.42
54w	4000k	6070	>80	20°	1,4	1/3	20046B.54.20.40		20046B.54.20.42
18w	4000k	2700	>80	40°	1,4	1/3	20046B.18.40.40	20046B.18.40.41	20046B.18.40.42
25w	4000k	3640	>80	40°	1,4	1/3	20046B.25.40.40	20046B.25.40.41	20046B.25.40.42
33w	4000k	4500	>80	40°	1,4	1/3	20046B.33.40.40	20046B.33.40.41	20046B.33.40.42
39w	4000k	5120	>80	40°	1,4	1/3	20046B.39.40.40	20046B.39.40.41	20046B.39.40.42
45w	4000k	5710	>80	40°	1,4	1/3	20046B.45.40.40	20046B.45.40.41	20046B.45.40.42
54w	4000k	6445	>80	40°	1,4	1/3	20046B.54.40.40		20046B.54.40.42
18w	4000k	2515	>80	60°	1,4	1/3	20046B.18.60.40	20046B.18.60.41	20046B.18.60.42
25w	4000k	3385	>80	60°	1,4	1/3	20046B.25.60.40	20046B.25.60.41	20046B.25.60.42
33w	4000k	4185	>80	60°	1,4	1/3	20046B.33.60.40	20046B.33.60.41	20046B.33.60.42
39w	4000k	4760	>80	60°	1,4	1/3	20046B.39.60.40	20046B.39.60.41	20046B.39.60.42
45w	4000k	5315	>80	60°	1,4	1/3	20046B.45.60.40	20046B.45.60.41	20046B.45.60.42
54w	4000k	6000	>80	60°	1,4	1/3	20046B.54.60.40		20046B.54.60.42

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

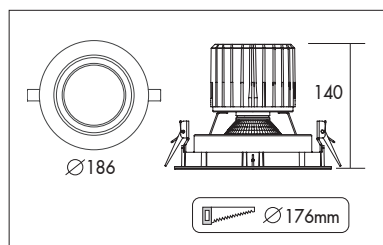

SPOTS SPOTS

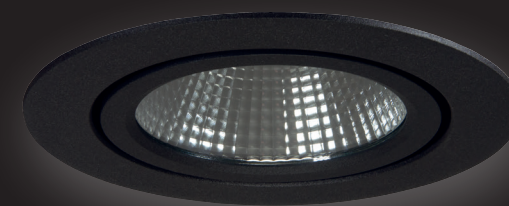


### Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White

### Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White



20046B.25.40.30

25w 3000k 40° 3460lm  
ηLB 81%

melis lighting