Cruiser BLACK UP/DOWN

PF>0,9 IP40

Elegant en slank LED wandarmatuur met directe/indirecte lichtbundel. Behuizing gemaakt van geëxtrudeerd zwart gelakt (RAL 9005) aluminium. Voorzien van breedstralende (>94°) hoogwaardig Micro Prisma of Opale diffuser (UGR<19). Wordt geleverd inclusief wandbeugel. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim wallmounted LED luminaire with direct/indirect beam angle. Housing made out of extruded black (RAL 9005) painted aluminium. Equipped with high quality wide angle (>94°) Micro Prism or Opal diffuser (UGR<19). Comes with a wall bracket. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / *Micro Prism*


Wattage Watts	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
15w-15w	3000k	1475-1475	600	82	100	0,9	1/3	61548BM.30.30DI	61548BM.30.32DI	61548BM.30.37DI
22w-22w	3000k	2280-2280	900	82	100	1,3	1/3	61548BM.44.30DI	61548BM.44.32DI	61548BM.44.37DI
15w-15w	4000k	1550-1550	600	82	100	0,9	1/3	61548BM.30.40DI	61548BM.30.42DI	61548BM.30.47DI
22w-22w	4000k	2400-2400	900	82	100	1,3	1/3	61548BM.44.40DI	61548BM.44.42DI	61548BM.44.47DI

Opaal / *Opal*


Wattage Watts	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
15w-15w	3000k	1400-1400	600	82	100	0,9	1/3	61548BP.30.30DI	61548BP.30.32DI	61548BP.30.37DI
22w-22w	3000k	2165-2165	900	82	100	1,3	1/3	61548BP.44.30DI	61548BP.44.32DI	61548BP.44.37DI
15w-15w	4000k	1475-1475	600	82	100	0,9	1/3	61548BP.30.40DI	61548BP.30.42DI	61548BP.30.47DI
22w-22w	4000k	2280-2280	900	82	100	1,3	1/3	61548BP.44.40DI	61548BP.44.42DI	61548BP.44.47DI

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

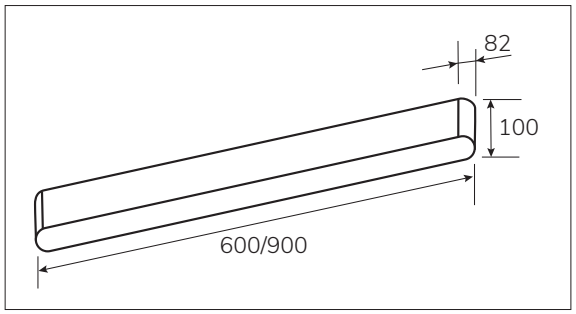




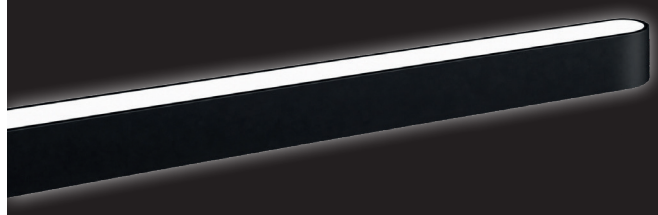

Opties:
- Geïntegreerde bewegingssensor
- Corridor functie
- EasySense-sensor

Options:
- *Integrated motionsensor*
- *Corridor function*
- *EasySense-sensor*



61548BM.30.30DI
15w-15w 3000k 1475-1475lm
ηLB 100%

melis lighting