Cruiser BLACK

PF>0,9 IP40

WAND EN PLAFOND *WALL AND CEILING*

Elegant en slank LED wandarmatuur. Behuizing gemaakt van geëxtrudeerd zwart gelakt (RAL 9005) aluminium. Voorzien van breedstralende (>94°) hoogwaardig Micro Prisma of Opale diffuser (UGR<19). Wordt geleverd inclusief wandbeugel. Geschikt voor o.a. scholen, kantoren, recepties en galerieën. Alle elektronische componenten in de behuizing. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Elegant slim wallmounted LED luminaire. Housing made out of extruded black (RAL 9005) painted aluminium. Equipped with high quality wide angle (>94°) Micro Prism or Opal diffuser (UGR<19). Comes with a wall bracket. Suitable for schools, offices, reception areas, and galleries. All electronic components inside the housing. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Micro Prisma / *Micro Prism*


Wattage Watts	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
20w	3000k	2000	600	82	100	0,9	1/3	61548BM.20.30D	61548BM.20.32D	61548BM.20.37D
30w	3000k	3090	900	82	100	1,3	1/3	61548BM.30.30D	61548BM.30.32D	61548BM.30.37D
20w	4000k	2100	600	82	100	0,9	1/3	61548BM.20.40D	61548BM.20.42D	61548BM.20.47D
30w	4000k	3250	900	82	100	1,3	1/3	61548BM.30.40D	61548BM.30.42D	61548BM.30.47D

Opaal / *Opal*


Wattage Watts	**Kleur** *Colour*	**Lumen** *Lumen*	**L (mm)** *L (mm)*	**B (mm)** *W (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*	**EasySense** *EasySense*
20w	3000k	1900	600	82	100	0,9	1/3	61548BP.20.30D	61548BP.20.32D	61548BP.20.37D
30w	3000k	2935	900	82	100	1,3	1/3	61548BP.30.30D	61548BP.30.32D	61548BP.30.37D
20w	4000k	1995	600	82	100	0,9	1/3	61548BP.20.40D	61548BP.20.42D	61548BP.20.47D
30w	4000k	3090	900	82	100	1,3	1/3	61548BP.30.40D	61548BP.30.42D	61548BP.30.47D

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

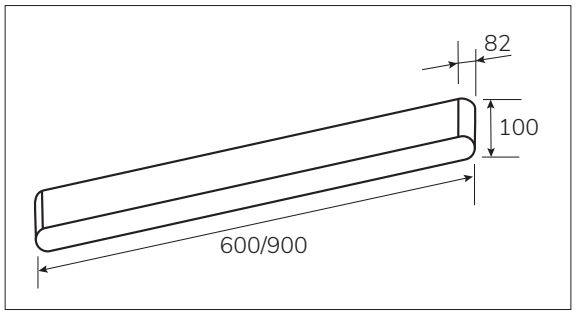




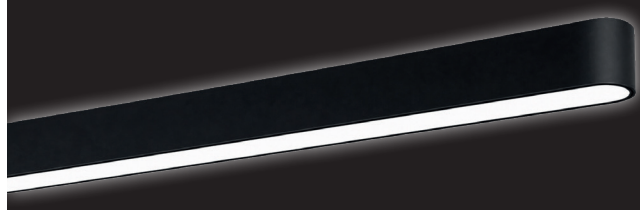

Opties:
- Geïntegreerde bewegingssensor
- Corridor functie
- EasySense-sensor

Options:
- *Integrated motionsensor*
- *Corridor function*
- *EasySense-sensor*



61548BM.20.30D
20w 3000k 2000lm
ηLB 100%

melis lighting