Crystal Multiwatt

PF>0,9 IP40 IK02


Decoratief opbouwarmatuur met strakke cilindrische vorm voor wand of plafond montage. Hoog rendement tot 115lm/w. Afscherming vervaardigd uit zeer hoogwaardig dual satin opaal PMMA. Montageplaat uit witgelakt plaatstaal. Voorzien van kroonsteen voor doorvoerbedrading. Diffuser eenvoudig te monteren met 3-punts bajonetsluiting. Armaturen zijn met dip-switches aan te passen qua vermogen. O.a. toepasbaar als basisverlichting in trappenhallen en gangen. Ook leverbaar met ingebouwde hoogfrequente sensormodule (bewegingssensor) met instelbaar detectiebereik. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Decorative surface mounted luminaire with modern cilindrical shape for wall or ceiling. High efficiency up to 115lm/w. Diffuser made of high quality dual satinised PMMA cover. Mounting plate made of white painted (RAL 9003) sheet metal. With internal connector block for through-wiring. Easy mounting with 3-point bajonet system. Luminaires can be adjusted in terms of power with dip switches. Applicable in corridors and stair houses. Also available with built-in high-frequency sensor module (motion sensor) with adjustable detection range. Low maintenance and high life expectancy (50.000 hours L80B10). Color stability, Mac Adam <3. Five years warranty.

Wattage Watts	**Kleur** Colour	**Lumen** Lumen	**CRI (Ra)** CRI (Ra)	**Diameter (mm)** Diameter (mm)	**Hoogte (mm)** Height (mm)	**Gewicht (kg)** Weight (kg)	**Artikel nr.** Article no.	**Dali** Dali	**Bewegings-sensor** Motion sensor
9-12w	3000-4000k	1400-1500	>90	290	70	0,7	23009A.0	23009A.2	23009A.S
12-24w	3000-4000k	2000-2100	>90	360	70	1,1	23009B.0	23009B.2	23009B.S
25-39w	3000-4000k	2100-2200	>90	464	70	1,8	23009C.0	23009C.2	23009C.S


* Lichtstroom van armatuur, tolerantie van +/- 10%


* *Luminaire luminous flux, tolerance of +/- 10%*

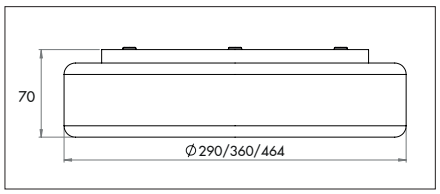

_____*.__.__65 *IP65 Upgrade*
Emergency pack 3 hour (internal)
Emergency pack 3 hour (internal) AUTOTEST
_____A.__.__PC *Polycarbonate Diffuser Upgrade IK10 290mm*
_____B.__.__PC *Polycarbonate Diffuser Upgrade IK10 360mm*
_____C.__.__PC *Polycarbonate Diffuser Upgrade IK10 464mm*


dip-switch control

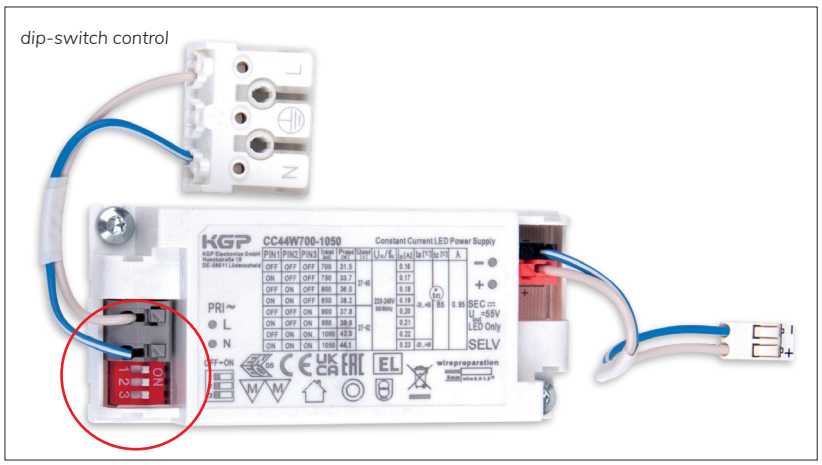



WAND EN PLAFOND *WALL AND CEILING*





23009A.0
9-12w 3000-4000k 1400-1500lm
ηLB 100%

melis lighting