


Ronde kantelbare LED downlight voor krachtige accentverlichting. 355° draaibaar en 30° kantelbaar. Gefacetteerde hoogglans 99,98% PC reflector met heldere PC afscherming. Zeer geschikt als accent verlichting in hotels en winkels. Verkrijgbaar in RAL9006 (zilver grijs). Directe aansluiting op 220-240VAC. Inclusief halogeenvrij snoer. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (60.000 uur L70B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round tiltable LED downlight for powerful accent lighting. Rotates through 350° and pivots through 25°. Facetted glossy 99,98% PC reflector with clear tempered PC diffuser. Very suitable as spot light in shops, hotels and restaurants. Standard available in RAL9006 (silver grey). Direct connection to 220-240VAC. Includes halogen-free cord. Fast and easy mounting with springs. Low maintenance and high life expectancy (60.000 hours L70B10). Colour stability, Mac Adam <3. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali-2 Dali-2
25w	2700k	2565	>90	12°	1,0	1/3	61278.G2512.27	61278.G2512.272
25w	2700k	2565	>90	24°	1,0	1/3	61278.G2524.27	61278.G2524.272
25w	2700k	2565	>90	35°	1,0	1/3	61278.G2535.27	61278.G2535.272
25w	3000k	2670	>90	12°	1,0	1/3	61278.G2512.30	61278.G2512.32
25w	3000k	2670	>90	24°	1,0	1/3	61278.G2524.30	61278.G2524.32
25w	3000k	2670	>90	35°	1,0	1/3	61278.G2535.30	61278.G2535.32
25w	4000k	2712	>90	12°	1,0	1/3	61278.G2512.40	61278.G2512.42
25w	4000k	2712	>90	24°	1,0	1/3	61278.G2524.40	61278.G2524.42
25w	4000k	2712	>90	35°	1,0	1/3	61278.G2535.40	61278.G2535.42

* Lichtstroom van armatuur, tolerantie van +/- 10%


* Luminaire luminous flux, tolerance of +/- 10%

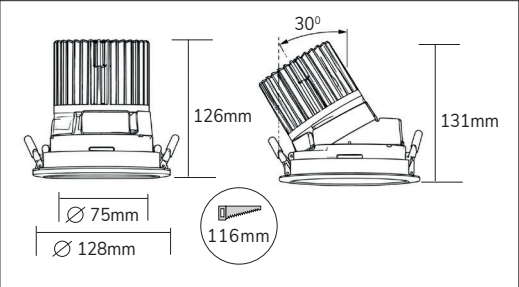


61278.honey (honeycom louvre)



61278.glas (wove glass)



SPOTS SPOTS



61278.G2512.27
25w 2700K
2565 lumen 12°