

Epic 112 BLACK ROUND TILT






Modulaire ronde kantelbare miniatuur LED spot. Zwarte behuizing uit gegoten aluminium (RAL9005). Verdiepte lens voor extra hoog comfort en lage UGR (smalle bundels). Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie.

Modular round tiltable LED spot light. Housing made of die casted black painted aluminium (RAL 9005). Deep baffle with lens for extra comfort and low glare (narrow beam angles). Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Amperage (mA) Amperage (mA)	Lumen* Lumen*	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
9w	3000k	250	1147	30°	0,6	61511B.093030	61511B.093032	61511B.093035
13w	3000k	350	1605	30°	0,6	61511B.133030	61511B.133032	61511B.133035
17w	3000k	500	2293	30°	0,6	61511B.173030	61511B.173032	61511B.173035
25w	3000k	700	2890	30°	0,6	61511B.253030	61511B.253032	61511B.253035
9w	3000k	250	1225	40°	0,6	61511B.094030	61511B.094032	61511B.094035
13w	3000k	350	1715	40°	0,6	61511B.134030	61511B.134032	61511B.134035
17w	3000k	500	2450	40°	0,6	61511B.174030	61511B.174032	61511B.174035
25w	3000k	700	3087	40°	0,6	61511B.254030	61511B.254032	61511B.254035
9w	3000k	250	1231	50°	0,6	61511B.095030	61511B.095032	61511B.095035
13w	3000k	350	1724	50°	0,6	61511B.135030	61511B.135032	61511B.135035
17w	3000k	500	2463	50°	0,6	61511B.175030	61511B.175032	61511B.175035
25w	3000k	700	3104	50°	0,6	61511B.255030	61511B.255032	61511B.255035
9w	3000k	250	1184	60°	0,6	61511B.096030	61511B.096032	61511B.096035
13w	3000k	350	1658	60°	0,6	61511B.136030	61511B.136032	61511B.136035
17w	3000k	500	2368	60°	0,6	61511B.176030	61511B.176032	61511B.176035
25w	3000k	700	2984	60°	0,6	61511B.256030	61511B.256032	61511B.256035
9w	4000k	250	1187	30°	0,6	61511B.093040	61511B.093042	61511B.093045
13w	4000k	350	1662	30°	0,6	61511B.133040	61511B.133042	61511B.133045
17w	4000k	500	2375	30°	0,6	61511B.173040	61511B.173042	61511B.173045
25w	4000k	700	2992	30°	0,6	61511B.253040	61511B.253042	61511B.253045
9w	4000k	250	1269	40°	0,6	61511B.094040	61511B.094042	61511B.094045
13w	4000k	350	1776	40°	0,6	61511B.134040	61511B.134042	61511B.134045
17w	4000k	500	2537	40°	0,6	61511B.174040	61511B.174042	61511B.174045
25w	4000k	700	3198	40°	0,6	61511B.254040	61511B.254042	61511B.254045
9w	4000k	250	1276	50°	0,6	61511B.095040	61511B.095042	61511B.095045
13w	4000k	350	1786	50°	0,6	61511B.135040	61511B.135042	61511B.135045
17w	4000k	500	2552	50°	0,6	61511B.175040	61511B.175042	61511B.175045
25w	4000k	700	3215	50°	0,6	61511B.255040	61511B.255042	61511B.255045
9w	4000k	250	1225	60°	0,6	61511B.096040	61511B.096042	61511B.096045
13w	4000k	350	1715	60°	0,6	61511B.136040	61511B.136042	61511B.136045
17w	4000k	500	2450	60°	0,6	61511B.176040	61511B.176042	61511B.176045
25w	4000k	700	3086	60°	0,6	61511B.256040	61511B.256042	61511B.256045

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

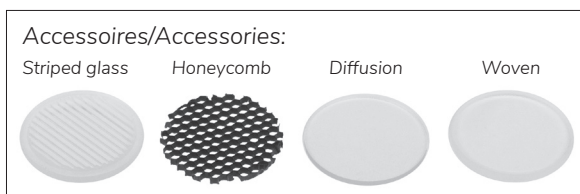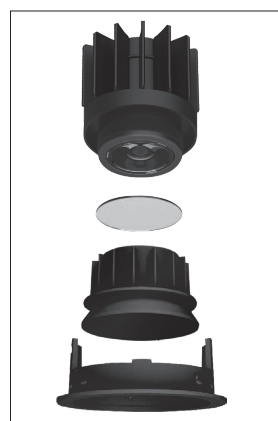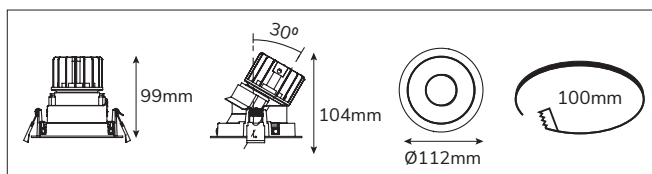

SPOTS SPOTS





Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version



61511B.093030

9w 3000K

1147 lumen 30°

melis lighting

Epic 88 GOOF RING 128

61625B.88.128



Epic 112 GOOF RING 128

61626B.112.128



Epic 112 GOOF RING 181

61626B.112.181

