

# Epic 112 BLACK ROUND WALLWASHER



Modulaire ronde vaste miniatuur LED spot. Zwarte behuizing uit gegoten aluminium (RAL9005). Vlakke reflector met wallwash lens om wanden tot aan het plafond aan te stralen. Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie

Modular round fixed LED spot light. Housing made of die casted black painted aluminium (RAL 9005). Flush reflector with wallwash effect to light the walls as high as the ceiling. Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Amperage (mA) Amperage (mA)	Lumen* Lumen*	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
9w	3000k	250	845	wallwash	0,4	61558B.0930	61558B.0932	61558B.0935
13w	3000k	350	1183	wallwash	0,4	61558B.1330	61558B.1332	61558B.1335
17w	3000k	500	1690	wallwash	0,4	61558B.1730	61558B.1732	61558B.1735
25w	3000k	700	2248	wallwash	0,4	61558B.2530	61558B.2532	61558B.2535
9w	4000k	250	875	wallwash	0,4	61558B.0930	61558B.0932	61558B.0935
13w	4000k	350	1226	wallwash	0,4	61558B.1330	61558B.1332	61558B.1335
17w	4000k	500	1751	wallwash	0,4	61558B.1730	61558B.1732	61558B.1735
25w	4000k	700	2328	wallwash	0,4	61558B.2530	61558B.2532	61558B.2535

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

SPOTS SPOTS






## Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

## Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version





61558B.0930

9w 3000K

845 lumen

melis lighting

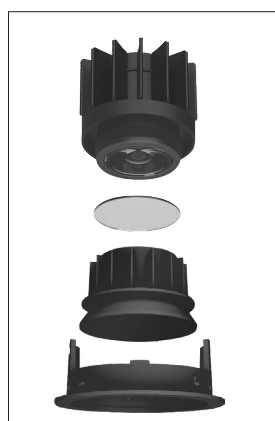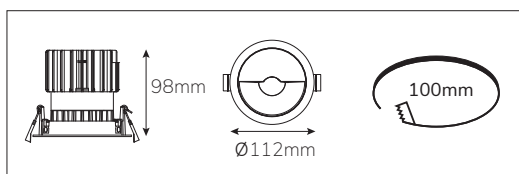

Epic 88 GOOF RING 128

61625B.88.128



Epic 112 GOOF RING 128

61626B.112.128



Epic 112 GOOF RING 181

61626B.112.181

