

Epic 112 WHITE ROUND TILT



SPOTS SPOTS



Modulaire ronde kantelbare miniatuur LED spot. Witte behuizing uit gegoten aluminium (RAL9003). Verdiepte lens voor extra hoog comfort en lage UGR (smalle bundels). Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie.

Modular round tiltable LED spot light. Housing made of die casted white painted aluminium (RAL 9003). Deep baffle with lens for extra comfort and low glare (narrow beam angles). Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Amperage (mA) Amperage (mA)	Lumen* Lumen*	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
9w	3000k	250	1147	30°	0,6	61511W.093030	61511W.093032	61511W.093035
13w	3000k	350	1605	30°	0,6	61511W.133030	61511W.133032	61511W.133035
17w	3000k	500	2293	30°	0,6	61511W.173030	61511W.173032	61511W.173035
25w	3000k	700	2890	30°	0,6	61511W.253030	61511W.253032	61511W.253035
9w	3000k	250	1225	40°	0,6	61511W.094030	61511W.094032	61511W.094035
13w	3000k	350	1715	40°	0,6	61511W.134030	61511W.134032	61511W.134035
17w	3000k	500	2450	40°	0,6	61511W.174030	61511W.174032	61511W.174035
25w	3000k	700	3087	40°	0,6	61511W.254030	61511W.254032	61511W.254035
9w	3000k	250	1231	50°	0,6	61511W.095030	61511W.095032	61511W.095035
13w	3000k	350	1724	50°	0,6	61511W.135030	61511W.135032	61511W.135035
17w	3000k	500	2463	50°	0,6	61511W.175030	61511W.175032	61511W.175035
25w	3000k	700	3104	50°	0,6	61511W.255030	61511W.255032	61511W.255035
9w	3000k	250	1184	60°	0,6	61511W.096030	61511W.096032	61511W.096035
13w	3000k	350	1658	60°	0,6	61511W.136030	61511W.136032	61511W.136035
17w	3000k	500	2368	60°	0,6	61511W.176030	61511W.176032	61511W.176035
25w	3000k	700	2984	60°	0,6	61511W.256030	61511W.256032	61511W.256035
9w	4000k	250	1187	30°	0,6	61511W.093040	61511W.093042	61511W.093045
13w	4000k	350	1662	30°	0,6	61511W.133040	61511W.133042	61511W.133045
17w	4000k	500	2375	30°	0,6	61511W.173040	61511W.173042	61511W.173045
25w	4000k	700	2992	30°	0,6	61511W.253040	61511W.253042	61511W.253045
9w	4000k	250	1269	40°	0,6	61511W.094040	61511W.094042	61511W.094045
13w	4000k	350	1776	40°	0,6	61511W.134040	61511W.134042	61511W.134045
17w	4000k	500	2537	40°	0,6	61511W.174040	61511W.174042	61511W.174045
25w	4000k	700	3198	40°	0,6	61511W.254040	61511W.254042	61511W.254045
9w	4000k	250	1276	50°	0,6	61511W.095040	61511W.095042	61511W.095045
13w	4000k	350	1786	50°	0,6	61511W.135040	61511W.135042	61511W.135045
17w	4000k	500	2552	50°	0,6	61511W.175040	61511W.175042	61511W.175045
25w	4000k	700	3215	50°	0,6	61511W.255040	61511W.255042	61511W.255045
9w	4000k	250	1225	60°	0,6	61511W.096040	61511W.096042	61511W.096045
13w	4000k	350	1715	60°	0,6	61511W.136040	61511W.136042	61511W.136045
17w	4000k	500	2450	60°	0,6	61511W.176040	61511W.176042	61511W.176045
25w	4000k	700	3086	60°	0,6	61511W.256040	61511W.256042	61511W.256045

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

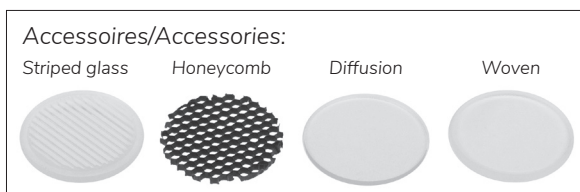
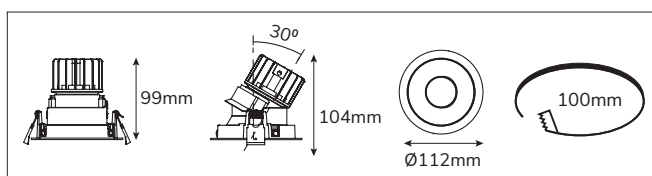


Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version



61511W.093030

9w 3000K

1147 lumen 30°

melis lighting

Epic 88 GOOF RING 128

61625W.88.128



Epic 112 GOOF RING 128

61626W.112.128



Epic 112 GOOF RING 181

61626W.112.181

