

Epic 112 WHITE SQUARE TILT






Modulaire vierkante kantelbare miniatuur LED spot. Witte behuizing uit gegoten aluminium (RAL9003). Verdiepte lens voor extra hoog comfort en lage UGR (smalle bundels). Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie.

Modular square tiltable LED spot light. Housing made of die casted white painted aluminium (RAL 9003). Deep baffle with lens for extra comfort and low glare (narrow beam angles). Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

| Wattage Watts | Kleur Colour | Amperage (mA) Amperage (mA) | Lumen* Lumen* | Graden Degree | Gewicht (kg) Weight (kg) | Artikel nr. Article no. | Dali Dali | Casambi Casambi |
|------------------|-----------------|--------------------------------|------------------|------------------|-----------------------------|----------------------------|---------------|--------------------|
| 9w | 3000k | 250 | 1147 | 30° | 0,6 | 61512W.093030 | 61512W.093032 | 61512W.093035 |
| 13w | 3000k | 350 | 1605 | 30° | 0,6 | 61512W.133030 | 61512W.133032 | 61512W.133035 |
| 17w | 3000k | 500 | 2293 | 30° | 0,6 | 61512W.173030 | 61512W.173032 | 61512W.173035 |
| 25w | 3000k | 700 | 2890 | 30° | 0,6 | 61512W.253030 | 61512W.253032 | 61512W.253035 |
| 9w | 3000k | 250 | 1225 | 40° | 0,6 | 61512W.094030 | 61512W.094032 | 61512W.094035 |
| 13w | 3000k | 350 | 1715 | 40° | 0,6 | 61512W.134030 | 61512W.134032 | 61512W.134035 |
| 17w | 3000k | 500 | 2450 | 40° | 0,6 | 61512W.174030 | 61512W.174032 | 61512W.174035 |
| 25w | 3000k | 700 | 3087 | 40° | 0,6 | 61512W.254030 | 61512W.254032 | 61512W.254035 |
| 9w | 3000k | 250 | 1231 | 50° | 0,6 | 61512W.095030 | 61512W.095032 | 61512W.095035 |
| 13w | 3000k | 350 | 1724 | 50° | 0,6 | 61512W.135030 | 61512W.135032 | 61512W.135035 |
| 17w | 3000k | 500 | 2463 | 50° | 0,6 | 61512W.175030 | 61512W.175032 | 61512W.175035 |
| 25w | 3000k | 700 | 3104 | 50° | 0,6 | 61512W.255030 | 61512W.255032 | 61512W.255035 |
| 9w | 3000k | 250 | 1184 | 60° | 0,6 | 61512W.096030 | 61512W.096032 | 61512W.096035 |
| 13w | 3000k | 350 | 1658 | 60° | 0,6 | 61512W.136030 | 61512W.136032 | 61512W.136035 |
| 17w | 3000k | 500 | 2368 | 60° | 0,6 | 61512W.176030 | 61512W.176032 | 61512W.176035 |
| 25w | 3000k | 700 | 2984 | 60° | 0,6 | 61512W.256030 | 61512W.256032 | 61512W.256035 |
| 9w | 4000k | 250 | 1187 | 30° | 0,6 | 61512W.093040 | 61512W.093042 | 61512W.093045 |
| 13w | 4000k | 350 | 1662 | 30° | 0,6 | 61512W.133040 | 61512W.133042 | 61512W.133045 |
| 17w | 4000k | 500 | 2375 | 30° | 0,6 | 61512W.173040 | 61512W.173042 | 61512W.173045 |
| 25w | 4000k | 700 | 2992 | 30° | 0,6 | 61512W.253040 | 61512W.253042 | 61512W.253045 |
| 9w | 4000k | 250 | 1269 | 40° | 0,6 | 61512W.094040 | 61512W.094042 | 61512W.094045 |
| 13w | 4000k | 350 | 1776 | 40° | 0,6 | 61512W.134040 | 61512W.134042 | 61512W.134045 |
| 17w | 4000k | 500 | 2537 | 40° | 0,6 | 61512W.174040 | 61512W.174042 | 61512W.174045 |
| 25w | 4000k | 700 | 3198 | 40° | 0,6 | 61512W.254040 | 61512W.254042 | 61512W.254045 |
| 9w | 4000k | 250 | 1276 | 50° | 0,6 | 61512W.095040 | 61512W.095042 | 61512W.095045 |
| 13w | 4000k | 350 | 1786 | 50° | 0,6 | 61512W.135040 | 61512W.135042 | 61512W.135045 |
| 17w | 4000k | 500 | 2552 | 50° | 0,6 | 61512W.175040 | 61512W.175042 | 61512W.175045 |
| 25w | 4000k | 700 | 3215 | 50° | 0,6 | 61512W.255040 | 61512W.255042 | 61512W.255045 |
| 9w | 4000k | 250 | 1225 | 60° | 0,6 | 61512W.096040 | 61512W.096042 | 61512W.096045 |
| 13w | 4000k | 350 | 1715 | 60° | 0,6 | 61512W.136040 | 61512W.136042 | 61512W.136045 |
| 17w | 4000k | 500 | 2450 | 60° | 0,6 | 61512W.176040 | 61512W.176042 | 61512W.176045 |
| 25w | 4000k | 700 | 3086 | 60° | 0,6 | 61512W.256040 | 61512W.256042 | 61512W.256045 |

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

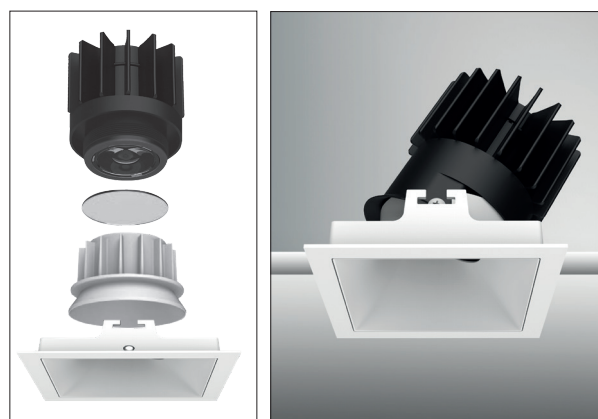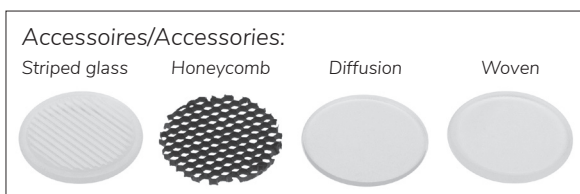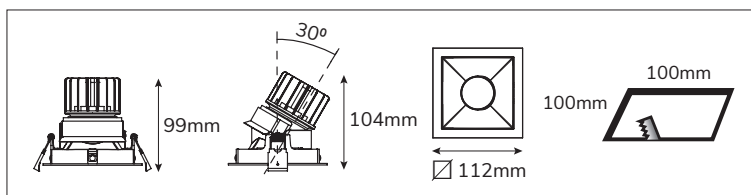

SPOTS SPOTS





Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version

trimless version optional



61512W.093030

9w 3000K

1147 lumen 30°

melis lighting