

Epic 65 WHITE SQUARE TILT

PF>0,95

MAX 30mm

IP44

F

CE

RoHS

□




Modulaire vierkante kantelbare miniatuur LED spot. Witte behuizing uit gegoten aluminium (RAL9003). Verdiepte lens voor extra hoog comfort en lage UGR (smalle bundels). Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie.

Modular square tiltable LED spot light. Housing made of die casted white painted aluminium (RAL 9003). Deep baffle with lens for extra comfort and low glare (narrow beam angles). Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Amperage (mA) Amperage (mA)	Lumen* Lumen*	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
5w	3000k	150	567	30°	0,3	61504W.053030	61504W.053032	61504W.053035
9w	3000k	250	945	30°	0,3	61504W.093030	61504W.093032	61504W.093035
13w	3000k	350	1324	30°	0,3	61504W.133030	61504W.133032	61504W.133035
5w	3000k	150	623	35°	0,3	61504W.053530	61504W.053532	61504W.053535
9w	3000k	250	1038	35°	0,3	61504W.093530	61504W.093532	61504W.093535
13w	3000k	350	1453	35°	0,3	61504W.133530	61504W.133532	61504W.133535
5w	3000k	150	623	50°	0,3	61504W.055030	61504W.055032	61504W.055035
9w	3000k	250	1038	50°	0,3	61504W.095030	61504W.095032	61504W.095035
13w	3000k	350	1453	50°	0,3	61504W.135030	61504W.135032	61504W.135035
5w	3000k	150	1007	60°	0,3	61504W.060530	61504W.060532	61504W.060535
9w	3000k	250	1007	60°	0,3	61504W.096030	61504W.096032	61504W.096035
13w	3000k	350	1410	60°	0,3	61504W.136030	61504W.136032	61504W.136035
5w	4000k	150	588	30°	0,3	61504W.053040	61504W.053042	61504W.053045
9w	4000k	250	980	30°	0,3	61504W.093040	61504W.093042	61504W.093045
13w	4000k	350	1372	30°	0,3	61504W.133040	61504W.133042	61504W.133045
5w	4000k	150	644	35°	0,3	61504W.053540	61504W.053542	61504W.053545
9w	4000k	250	1073	35°	0,3	61504W.093540	61504W.093542	61504W.093545
13w	4000k	350	1502	35°	0,3	61504W.133540	61504W.133542	61504W.133545
5w	4000k	150	644	50°	0,3	61504W.055040	61504W.055042	61504W.055045
9w	4000k	250	1073	50°	0,3	61504W.095040	61504W.095042	61504W.095045
13w	4000k	350	1502	50°	0,3	61504W.135040	61504W.135042	61504W.135045
5w	4000k	150	1042	60°	0,3	61504W.060540	61504W.060542	61504W.060545
9w	4000k	250	1042	60°	0,3	61504W.096040	61504W.096042	61504W.096045
13w	4000k	350	1459	60°	0,3	61504W.136040	61504W.136042	61504W.136045

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

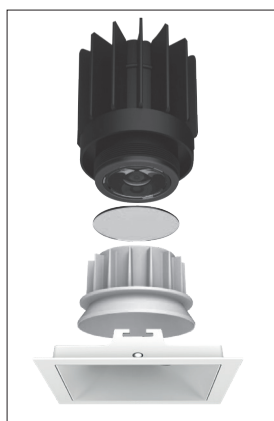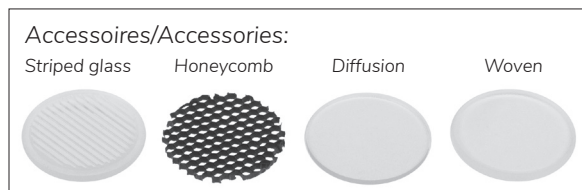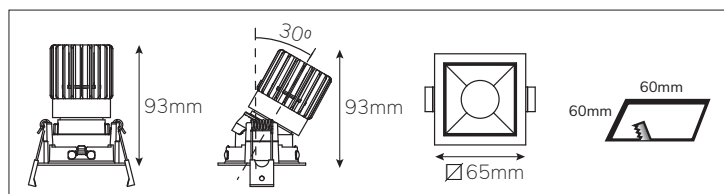

SPOTS SPOTS


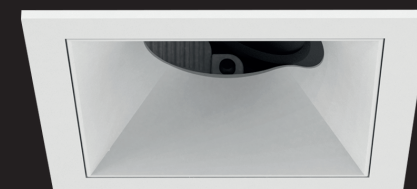


Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version



61504W.053030

5w 3000K

567 lumen 30°

melis lighting