

# Epic 88 BLACK ROUND TILT






Modulaire ronde kantelbare miniatuur LED spot. Zwarte behuizing uit gegoten aluminium (RAL9005). Verdiepte lens voor extra hoog comfort en lage UGR (smalle bundels). Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie.

Modular round tiltable LED spot light. Housing made of die casted black painted aluminium (RAL 9005). Deep baffle with lens for extra comfort and low glare (narrow beam angles). Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Amperage (mA) Amperage (mA)	Lumen* Lumen*	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
5w	3000k	150	596	30°	0,4	61507B.053030	61507B.053032	61507B.053035
9w	3000k	250	993	30°	0,4	61507B.093030	61507B.093032	61507B.093035
13w	3000k	350	1390	30°	0,4	61507B.133030	61507B.133032	61507B.133035
17w	3000k	500	1787	30°	0,4	61507B.173030	61507B.173032	61507B.173035
5w	3000k	150	729	35°	0,4	61507B.053530	61507B.053532	61507B.053535
9w	3000k	250	1214	35°	0,4	61507B.093530	61507B.093532	61507B.093535
13w	3000k	350	1700	35°	0,4	61507B.133530	61507B.133532	61507B.133535
17w	3000k	500	2186	35°	0,4	61507B.173530	61507B.173532	61507B.173535
5w	3000k	150	734	50°	0,4	61507B.055030	61507B.055032	61507B.055035
9w	3000k	250	1224	50°	0,4	61507B.095030	61507B.095032	61507B.095035
13w	3000k	350	1714	50°	0,4	61507B.135030	61507B.135032	61507B.135035
17w	3000k	500	2203	50°	0,4	61507B.175030	61507B.175032	61507B.175035
5w	3000k	150	761	60°	0,4	61507B.056030	61507B.056032	61507B.056035
9w	3000k	250	1205	60°	0,4	61507B.096030	61507B.096032	61507B.096035
13w	3000k	350	1686	60°	0,4	61507B.136030	61507B.136032	61507B.136035
17w	3000k	500	2169	60°	0,4	61507B.176030	61507B.176032	61507B.176035
5w	4000k	150	685	30°	0,4	61507B.053040	61507B.053042	61507B.053045
9w	4000k	250	1142	30°	0,4	61507B.093040	61507B.093042	61507B.093045
13w	4000k	350	1599	30°	0,4	61507B.133040	61507B.133042	61507B.133045
17w	4000k	500	2055	30°	0,4	61507B.173040	61507B.173042	61507B.173045
5w	4000k	150	754	35°	0,4	61507B.053540	61507B.053542	61507B.053545
9w	4000k	250	1258	35°	0,4	61507B.093540	61507B.093542	61507B.093545
13w	4000k	350	1761	35°	0,4	61507B.133540	61507B.133542	61507B.133545
17w	4000k	500	2264	35°	0,4	61507B.173540	61507B.173542	61507B.173545
5w	4000k	150	761	50°	0,4	61507B.055040	61507B.055042	61507B.055045
9w	4000k	250	1267	50°	0,4	61507B.095040	61507B.095042	61507B.095045
13w	4000k	350	1775	50°	0,4	61507B.135040	61507B.135042	61507B.135045
17w	4000k	500	2282	50°	0,4	61507B.175040	61507B.175042	61507B.175045
5w	4000k	150	788	60°	0,4	61507B.056040	61507B.056042	61507B.056045
9w	4000k	250	1248	60°	0,4	61507B.096040	61507B.096042	61507B.096045
13w	4000k	350	1747	60°	0,4	61507B.136040	61507B.136042	61507B.136045
17w	4000k	500	2247	60°	0,4	61507B.176040	61507B.176042	61507B.176045

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

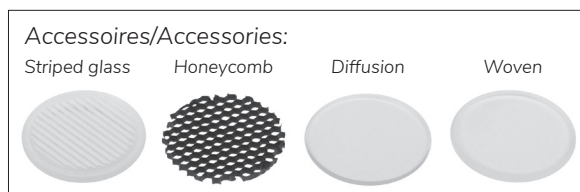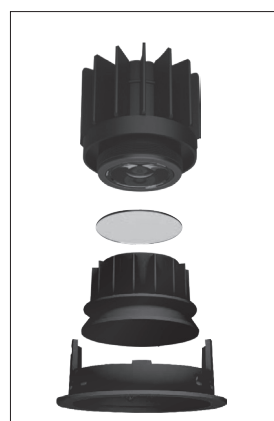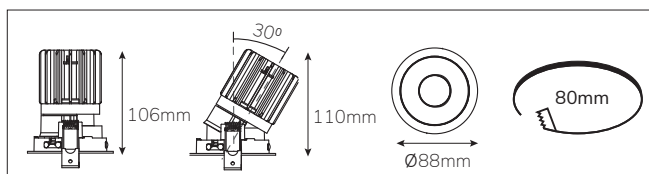

SPOTS SPOTS





### Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

### Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version



61507B.0530030

5w 3000K

596 lumen 30°

melis lighting

Epic 88 GOOF RING 128

61625B.88.128



Epic 112 GOOF RING 128

61626B.112.128



Epic 112 GOOF RING 181

61626B.112.181

