

Epic 88 WHITE ROUND WALLWASHER

PF>0,95



IP65



CE

RoHS



Modulaire ronde vaste miniatuur LED spot. Witte behuizing uit gegoten aluminium (RAL9003). Vlakke reflector met wallwash lens om wanden tot aan het plafond aan te stralen. Standaard geleverd met CRI > 90 (R9 > 80) COB SDCM < 2. Verkrijgbaar met verschillende bundels en met grote keus aan accessoires. Wordt geleverd inclusief externe driver. Snelle en eenvoudige montage met veren. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting (L90B10 50.000 uur). Vijf jaar garantie


Modular round fixed LED spot light. Housing made of die casted white painted aluminium (RAL 9003). Flush reflector with wallwash effect to light the walls as high as the ceiling. Standard delivered in CRI > 90 (R9 > 80) COB SDCM < 2. Available with different beam angles and large range of accessories. Delivered with external driver. Direct connection to mains. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Amperage (mA) Amperage (mA)	Lumen* Lumen*	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
5w	3000k	150	480	wallwash	0,4	61556W.0530	61556W.0532	61556W.0535
9w	3000k	250	800	wallwash	0,4	61556W.0930	61556W.0932	61556W.0935
13w	3000k	350	1119	wallwash	0,4	61556W.1330	61556W.1332	61556W.1335
17w	3000k	500	1439	wallwash	0,4	61556W.1730	61556W.1732	61556W.1735
5w	4000k	150	681	wallwash	0,4	61556W.0530	61556W.0532	61556W.0535
9w	4000k	250	1135	wallwash	0,4	61556W.0930	61556W.0932	61556W.0935
13w	4000k	350	1589	wallwash	0,4	61556W.1330	61556W.1332	61556W.1335
17w	4000k	500	2043	wallwash	0,4	61556W.1730	61556W.1732	61556W.1735

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

SPOTS SPOTS







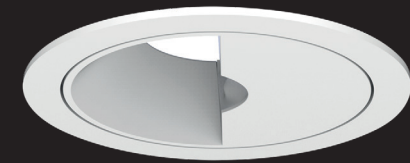


Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + helder glas
- Trimless versie

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- IP65 upgrade, ring + clear glass
- Trimless version

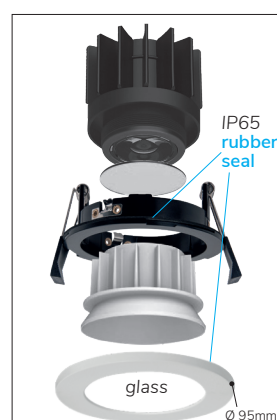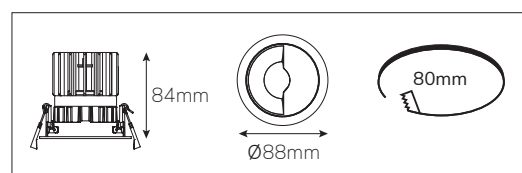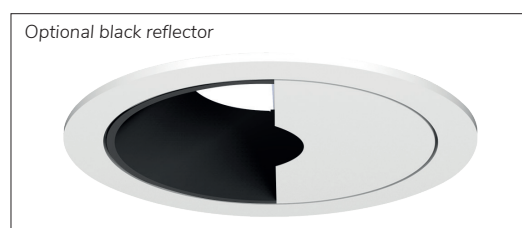

61556W.0530
5w 3000K
480 lumen

melis lighting