

Focus BLACK LARGE





Ronde LED spotlight met uitschuifbare kop voor maximale flexibiliteit. 350° draaibaar en 55° kantelbaar. Gefacetteerde hoogglans 99,98% aluminium reflector met helder gehard glazen afscherming. Lage verblinding (UGR<17). Standaard verkrijgbaar in RAL 9005 (zwart). Zeer geschikt als accent en basisverlichting in hotels, en restaurants. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round tiltable LED spot light with extractable luminaire head for maximum flexibility. Rotates through 350° and pivots through 55°. Facetted glossy 99,98% aluminium reflector with clear tempered glass diffuser. Low glare (UGR<17). Very suitable in hotels, bars and restaurants. Standard available in RAL 9005 (black). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI(Ra)	Graden Degree	Gewicht (kg) Weight (kg)	Artikel nr. Article no.	Dali Dali	Casambi Casambi
25w	3000k	3454	>80	15°	1,6	20070B251530	20070B251532	20070B251535
25w	3000k	3437	>80	22°	1,6	20070B252230	20070B252232	20070B252235
25w	3000k	3435	>80	24°	1,6	20070B252430	20070B252432	20070B252435
25w	3000k	3428	>80	40°	1,6	20070B254030	20070B254032	20070B254035
25w	3000k	3405	>80	65°	1,6	20070B256530	20070B256532	20070B256535
25w	4000k	3627	>80	15°	1,6	20070B251530	20070B251532	20070B251535
25w	4000k	3609	>80	22°	1,6	20070B252230	20070B252232	20070B252235
25w	4000k	3607	>80	24°	1,6	20070B252430	20070B252432	20070B252435
25w	4000k	3599	>80	40°	1,6	20070B254030	20070B254032	20070B254035
26w	4000k	3575	>80	65°	1,6	20070B256530	20070B256532	20070B256535
33w	3000k	4441	>80	15°	1,6	20070B331530	20070B331532	20070B331535
33w	3000k	4419	>80	22°	1,6	20070B332230	20070B332232	20070B332235
33w	3000k	4416	>80	24°	1,6	20070B332430	20070B332432	20070B332435
33w	3000k	4407	>80	40°	1,6	20070B334030	20070B334032	20070B334035
33w	3000k	4378	>80	65°	1,6	20070B336530	20070B336532	20070B336535
33w	4000k	4663	>80	15°	1,6	20070B331530	20070B331532	20070B331535
33w	4000k	4640	>80	22°	1,6	20070B332230	20070B332232	20070B332235
33w	4000k	4637	>80	24°	1,6	20070B332430	20070B332432	20070B332435
33w	4000k	4627	>80	40°	1,6	20070B334030	20070B334032	20070B334035
33w	4000k	4597	>80	65°	1,6	20070B336530	20070B336532	20070B336535
39w	3000k	5181	>80	15°	1,6	20070B391530	20070B391532	20070B391535
39w	3000k	5156	>80	22°	1,6	20070B392230	20070B392232	20070B392235
39w	3000k	5152	>80	24°	1,6	20070B392430	20070B392432	20070B392435
39w	3000k	5142	>80	40°	1,6	20070B394030	20070B394032	20070B394035
39w	3000k	5108	>80	65°	1,6	20070B396530	20070B396532	20070B396535
39w	4000k	5440	>80	15°	1,6	20070B391530	20070B391532	20070B391535
39w	4000k	5413	>80	22°	1,6	20070B392230	20070B392232	20070B392235
39w	4000k	5410	>80	24°	1,6	20070B392430	20070B392432	20070B392435
39w	4000k	5398	>80	40°	1,6	20070B394030	20070B394032	20070B394035
39w	4000k	5363	>80	65°	1,6	20070B396530	20070B396532	20070B396535

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

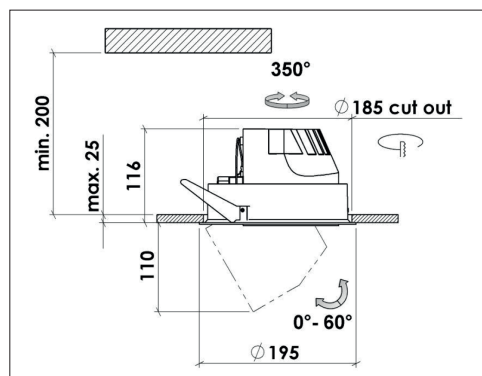

20070B331530
33w 3000K
4441 lumen 15°

melis lighting

SPOTS SPOTS



Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- 2700K, 3500k of hogere CRI waarde 90
- Vlees, brood of Crisp White

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- 2700k, 3500k or higher CRI values 90
- Meat, bread or Crisp White