

Fora WHITE TW




Tunable white LED spotlight voor 3-fase rails. Behuizing wit (RAL 9003) gelakt aluminium met passieve koeling. 350° draaibaar en 90° kantelbaar. Gefacetteerde hoogrendement hoogglans reflector met heldere afscherming en lage verblinding (UGR<19). Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K (CRI>92). Zeer geschikt als richtspot in winkels. Inclusief interne DALI DT8 driver. Voorzien van 3-Fase adapter. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Tunable white LED spot light for 3-phase tracks. Die casted aluminium white (RAL 9003) painted housing. Rotates through 350° and pivots through 90°. Facetted high efficiency reflector with clear diffuser and low glare (UGR<19). Very suitable as directional spot light in shops. Delivered including internal DALI DT8 driver. Supplied including 3-phase adapter. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Dali DT8 Dali DT8	Casambi Casambi
13w	2700-6500k	1348-1575	>92	12°	1,6	20600W.13.12.TW	20600W.13.12.TWC
21w	2700-6500k	1845-2160	>92	12°	1,6	20600W.21.12.TW	20600W.21.12.TWC
26w	2700-6500k	2610-3070	>92	12°	1,6	20600W.26.12.TW	20600W.26.12.TWC
39w	2700-6500k	3595-4210	>92	12°	1,6	20600W.39.12.TW	20600W.39.12.TWC
47w	2700-6500k	4525-5310	>92	12°	1,6	20600W.47.12.TW	20600W.47.12.TWC
13w	2700-6500k	1348-1575	>92	24°	1,6	20600W.13.24.TW	20600W.13.24.TWC
21w	2700-6500k	1845-2160	>92	24°	1,6	20600W.21.24.TW	20600W.21.24.TWC
26w	2700-6500k	2610-3070	>92	24°	1,6	20600W.26.24.TW	20600W.26.24.TWC
39w	2700-6500k	3595-4210	>92	24°	1,6	20600W.39.24.TW	20600W.39.24.TWC
47w	2700-6500k	4525-5310	>92	24°	1,6	20600W.47.24.TW	20600W.47.24.TWC
13w	2700-6500k	1348-1575	>92	40°	1,6	20600W.13.40.TW	20600W.13.40.TWC
21w	2700-6500k	1845-2160	>92	40°	1,6	20600W.21.40.TW	20600W.21.40.TWC
26w	2700-6500k	2610-3070	>92	40°	1,6	20600W.26.40.TW	20600W.26.40.TWC
39w	2700-6500k	3595-4210	>92	40°	1,6	20600W.39.40.TW	20600W.39.40.TWC
47w	2700-6500k	4525-5310	>92	40°	1,6	20600W.47.40.TW	20600W.47.40.TWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

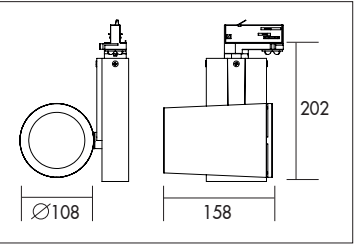


TRACK SYSTEEM TRACK SYSTEM



- Accessoires:**

 - Focus
 - Ribbelglas
 - Honingraat
- Accessories:**

 - Snooth
 - Striped glass
 - Honeycomb



20600W.13.12.TW
13w 2700-6500k 1348-1575lm
ηLB 87%