

Fortimo Panel EasySense





De Fortimo LED Panelen zijn ontworpen om ruimtes in kantoor- en bedrijfspanden te verlichten. Met hun slanke ontwerp kunnen ze eenvoudig worden geïnstalleerd. De Fortimo-panelen bieden uitstekende prestaties (131 lm/w CRI>80), betrouwbaarheid (L90B10 50.000 uur) en lichtkwaliteit. Het is ontworpen om te voldoen aan de normen voor kantoorverlichting (UGR<18). Met een DIP switch kan gekozen worden tussen 3000k en 4000k. De geïntegreerde EasySense-sensor combineert beweging- en daglichtregeling. Tot 100 sensoren kunnen draadloos worden gegroepeerd. Directe aansluiting op 220-240VAC. Onderhoudsarm en hoge levensduurverwachting. Kleurstabiliteit, Mac Adam <3. Vijf jaar garantie.

The Fortimo LED Panels are designed to illuminate spaces in office and commercial buildings. With their slim design, they can be easily installed. The Fortimo panels offer excellent performance (131 lm/w CRI>80), reliability (L90B10 50,000 hours), and light quality. It is designed to meet office lighting standards (UGR<18). A DIP switch allows selection between 3000k and 4000k. The integrated EasySense sensor combines motion and daylight control. Up to 100 sensors can be grouped wirelessly. Direct connection to 220-240VAC. Low maintenance and long lifespan. Color stability, Mac Adam <3. Five-year warranty.

Wattage Watts	Kleur Colour	CRI (Ra) CRI (Ra)	Lumen Lumen	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	EasySense EasySense
13w	3000k-4000k	>80	1655-1750	596	596	37	60917.G3.137
19w	3000k-4000k	>80	2364-2500	596	596	37	60917.G3.197
27w	3000k-4000k	>80	3310-3500	596	596	37	60917.G3.277
40w	3000k-4000k	>80	4965-5250	596	596	37	60917.G3.407

* Lichtstroom van armatuur, tolerantie van +/- 10%


* Luminaire luminous flux, tolerance of +/- 10%

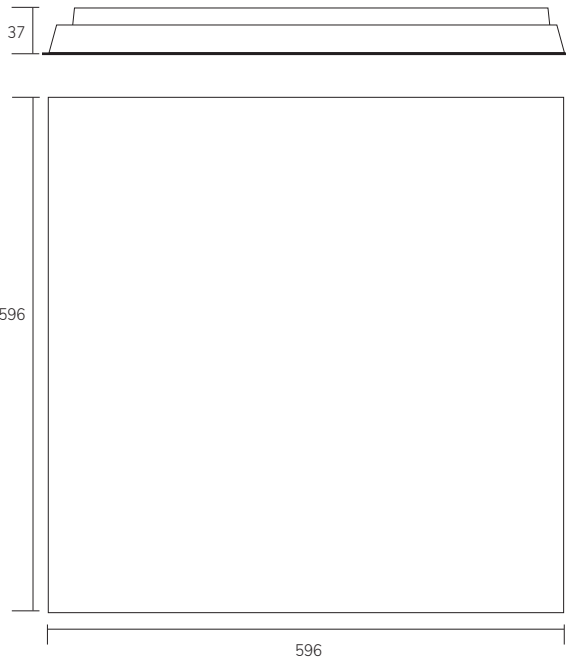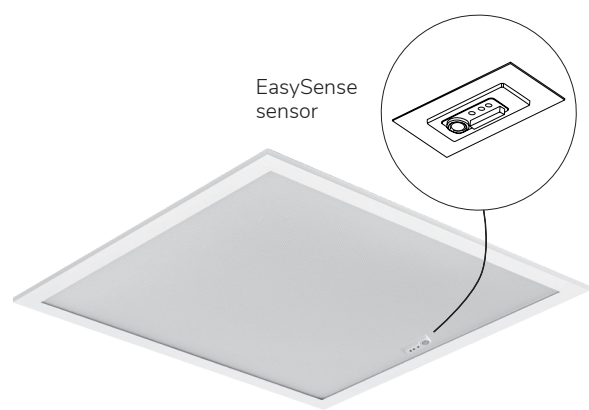

INBOUW ARMATUREN RECESSED LUMINAIRES



The FORTIMO trademark is owned by Signify Holding B.V.




60917.G3.277
27w 3000k-4000k 3310-3500lm
ηLB 100%

melis lighting

Fortimo LED panelen Accessoires

Om ervoor te zorgen dat Fortimo en Certaflux LED-panelen kunnen worden gebruikt in een grotere verscheidenheid aan binnentoepassingen, kan er een breed scala aan accessoires worden gebruikt. Door deze accessoires te selecteren kunnen de panelen als pendel of opbouw worden gebruikt als armatuur, in verschillende soorten plafonds zoals gipsplafonds.

To enable Fortimo and Certaflux LED panels to be used in a wider variety of indoor applications, a wide range of accessories can be used. By selecting these accessories the panels can be used as a pendant or surface mounted luminaire, or in different types of ceilings like plaster ceilings.

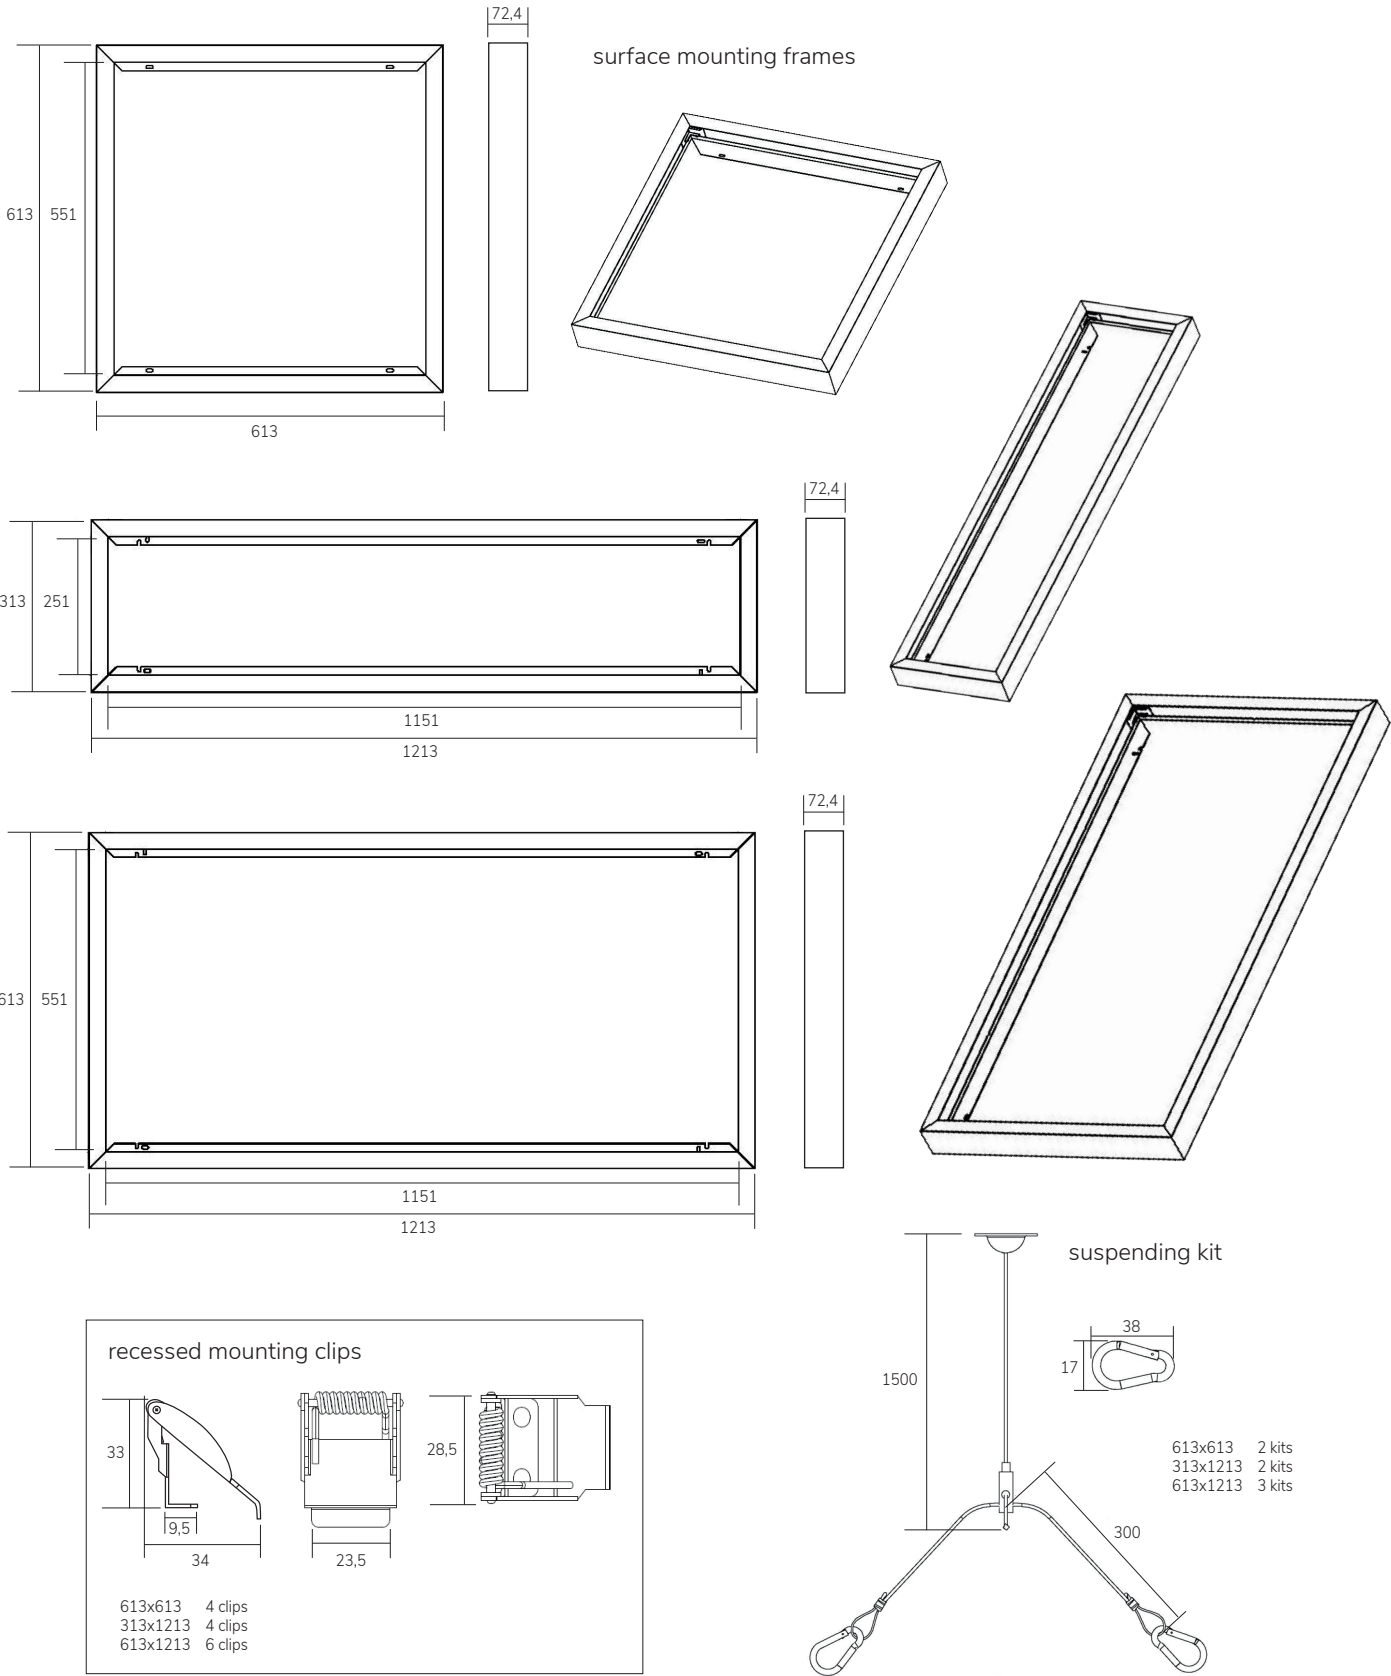

INBOUW ARMATUREN RECESSED LUMINAIRES

Key features and benefits

- Pendant cable set for suspension applications
- Surface mounted kit and Surface mounted kit basic for surface mounted applications
- Recessed frame and recessed clips to be used in recessed applications like plaster ceilings
- See the application matrix to see which accessory can be used with which panel




The FORTIMO trademark is owned by Signify Holding B.V.

- 60917.FRAME

Surface mounting frame 613x613x73mm (one piece set)
- 61305.FRAME

Surface mounting frame 313x1213x73mm (one piece set)
- 60983.FRAME

Surface mounting frame 313x1213x73mm (one piece set)

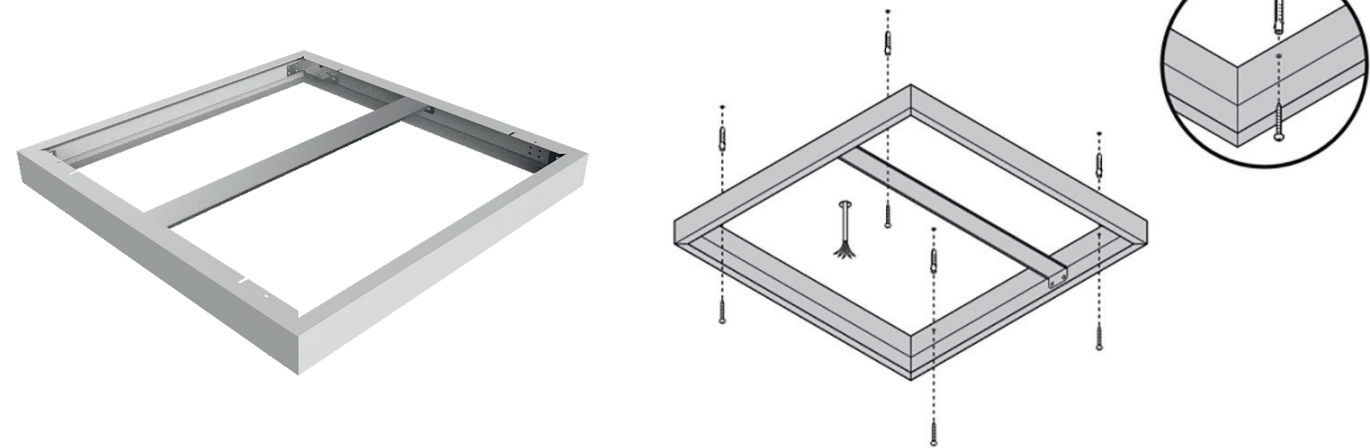


- 60917.FR.BASIC

Surface mounting frame 613x613x73mm
- 61305.FR.BASIC




Surface mounting frame 313x1213x73mm
- 60983.FR.BASIC

Surface mounting frame 313x1213x73mm

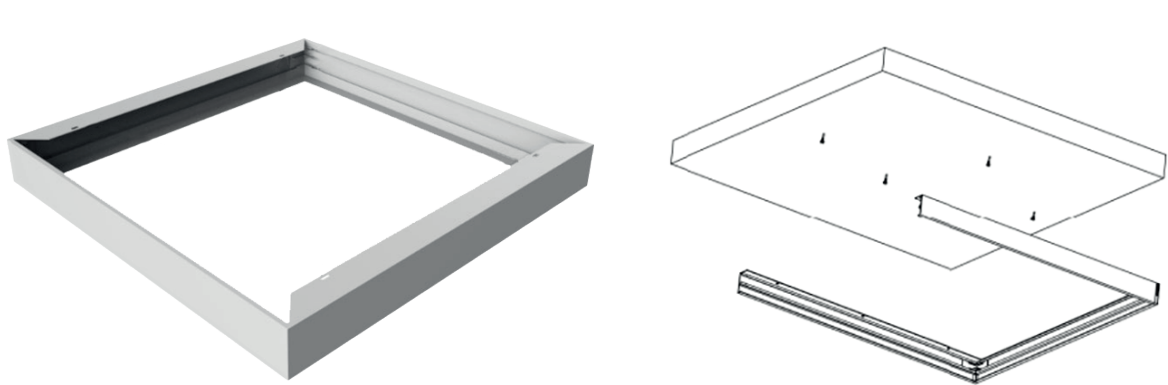

- 60917.GYPSUM

Gypsum Ceiling frame 625x625 (suitable for 596x596 panels)

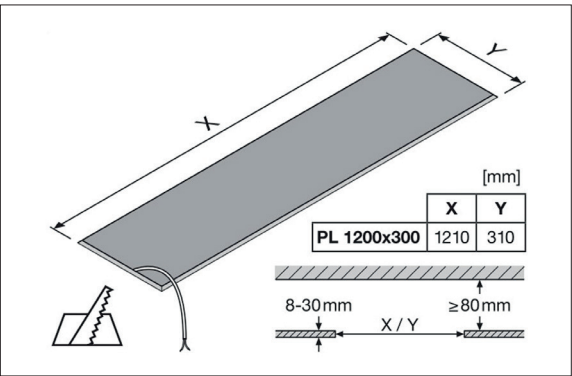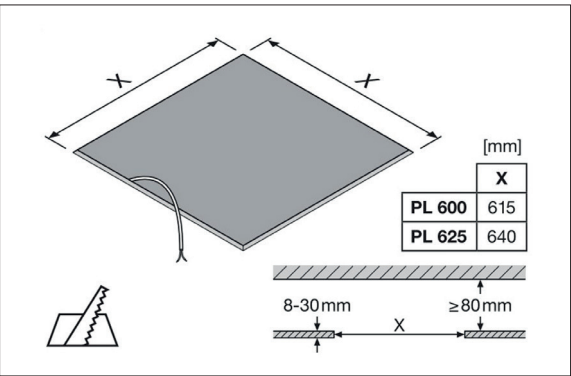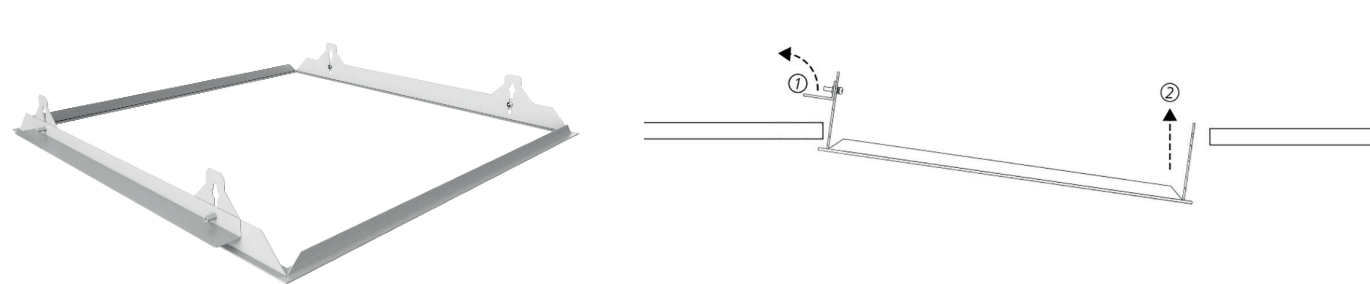

The FORTIMO trademark is owned by Signify Holding B.V.

- 60917.CLIPS

Clips Set for 596x596mm panels (4pc)

- 61305.CLIPS

Clips Set for 296x1196mm panels (4pc)

- 60983.CLIPS

Clips Set for 596x1196mm panels (6pc)

- 60917.SUSP

Suspension Set for 596x596mm panels (2pc)

- 61305.SUSP

Suspension Set for 296x1196mm panels (2pc)

- 60983.SUSP

Suspension Set for 596x1196mm panels (3pc)