


De Fortimo LED Panelen zijn ontworpen om ruimtes in kantoor- en bedrijfspanden te verlichten. Met hun ultraslanke ontwerp kunnen ze eenvoudig worden geïnstalleerd. De Fortimo-panelen bieden uitstekende prestaties (139 lm/w bij 4000K CRI80), betrouwbaarheid (50.000 uur) en lichtkwaliteit. Het is ontworpen om te voldoen aan de normen voor kantoorverlichting (UGR <18). Ruime keuze in verschillende formaten en kleurtemperaturen kunnen gecombineerd worden met een ruime keuze aan Xitanium-drivers die perfect bij uw toepassing passen.

The Fortimo LED Panels are designed to light up spaces in office and commercial buildings. With their ultra-slim design they can be installed easily. The Fortimo panels offer an excellent performance (139 lm/w at 4000K CRI80), reliability (50,000 hours) and quality of light. It's designed to meet the standards for office lighting (UGR <18). A wide range of choices in different sizes and color temperatures can be combined with a wide choice of Xitanium drivers to perfectly match your application.

Wattage Watts	Kleur Colour	CRI (Ra) CRI (Ra)	Lumen Lumen	Breedte (mm) Width (mm)	Lengte (mm) Length (mm)	Hoogte (mm) Height (mm)	Artikel nr. Article no.	Dali Dali
18w	3000k	>80	2393	596	596	10	60917.G3.1830	60917.G3.1832
25w	3000k	>80	3350	596	596	10	60917.G3.2530	60917.G3.2532
32w	3000k	>80	4307	596	596	10	60917.G3.3230	60917.G3.3232
38w	3000k	>80	4786	596	596	10	60917.G3.3830	60917.G3.3832
18w	3000k	>80	2393	296	1196	10	61305.G3.1830	61305.G3.1832
25w	3000k	>80	3350	296	1196	10	61305.G3.2530	61305.G3.2532
32w	3000k	>80	4307	296	1196	10	61305.G3.3230	61305.G3.3232
38w	3000k	>80	4786	296	1196	10	61305.G3.3830	61305.G3.3832
19w	3000k	>80	2733	596	1196	10	60983.G3.1930	60983.G3.1932
27w	3000k	>80	3904	596	1196	10	60983.G3.2730	60983.G3.2732
35w	3000k	>80	5020	596	1196	10	60983.G3.3530	60983.G3.3532
40w	3000k	>80	5857	596	1196	10	60983.G3.4030	60983.G3.4032
18w	4000k	>80	2500	596	596	10	60917.G3.1840	60917.G3.1842
25w	4000k	>80	3500	596	596	10	60917.G3.2540	60917.G3.2542
32w	4000k	>80	4500	596	596	10	60917.G3.3240	60917.G3.3242
38w	4000k	>80	5000	596	596	10	60917.G3.3840	60917.G3.3842
18w	4000k	>80	2500	296	1196	10	61305.G3.1840	61305.G3.1842
25w	4000k	>80	3500	296	1196	10	61305.G3.2540	61305.G3.2542
32w	4000k	>80	4500	296	1196	10	61305.G3.3240	61305.G3.3242
38w	4000k	>80	5000	296	1196	10	61305.G3.3840	61305.G3.3842
19w	4000k	>80	2855	596	1196	10	60983.G3.1940	60983.G3.1942
27w	4000k	>80	4079	596	1196	10	60983.G3.2740	60983.G3.2742
35w	4000k	>80	5245	596	1196	10	60983.G3.3540	60983.G3.3542
40w	4000k	>80	6119	596	1196	10	60983.G3.4040	60983.G3.4042

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

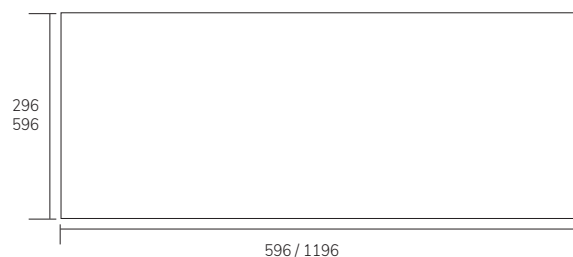


Key features and benefits

- Efficacy up to 139 lm/W on module level
- Ultra-slim LED module
- Excellent light uniformity
- Meeting office standards for low UGR
- Good quality of light (CRI >80)
- A wide range of different sizes
- High flexibility of lumen output due to wide driver choice
- 5 year system warranty
- Module is provided with integrated quick install connector
- Excellent color consistency of 3 SDCM
- Single packaging for each panel



The FORTIMO trademark is owned by Signify Holding B.V.

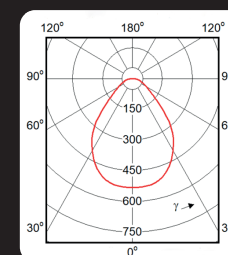

60917.G3.1830


18w 3000k 2393lm

ηLB 100%

Fortimo LED panelen Accessoires

Om ervoor te zorgen dat Fortimo en Certaflux LED-panelen kunnen worden gebruikt in een grotere verscheidenheid aan binnentoepassingen, kan er een breed scala aan accessoires worden gebruikt. Door deze accessoires te selecteren kunnen de panelen als pendel of opbouw worden gebruikt als armatuur, in verschillende soorten plafonds zoals gipsplafonds.

To enable Fortimo and Certaflux LED panels to be used in a wider variety of indoor applications, a wide range of accessories can be used. By selecting these accessories the panels can be used as a pendant or surface mounted luminaire, or in different types of ceilings like plaster ceilings.

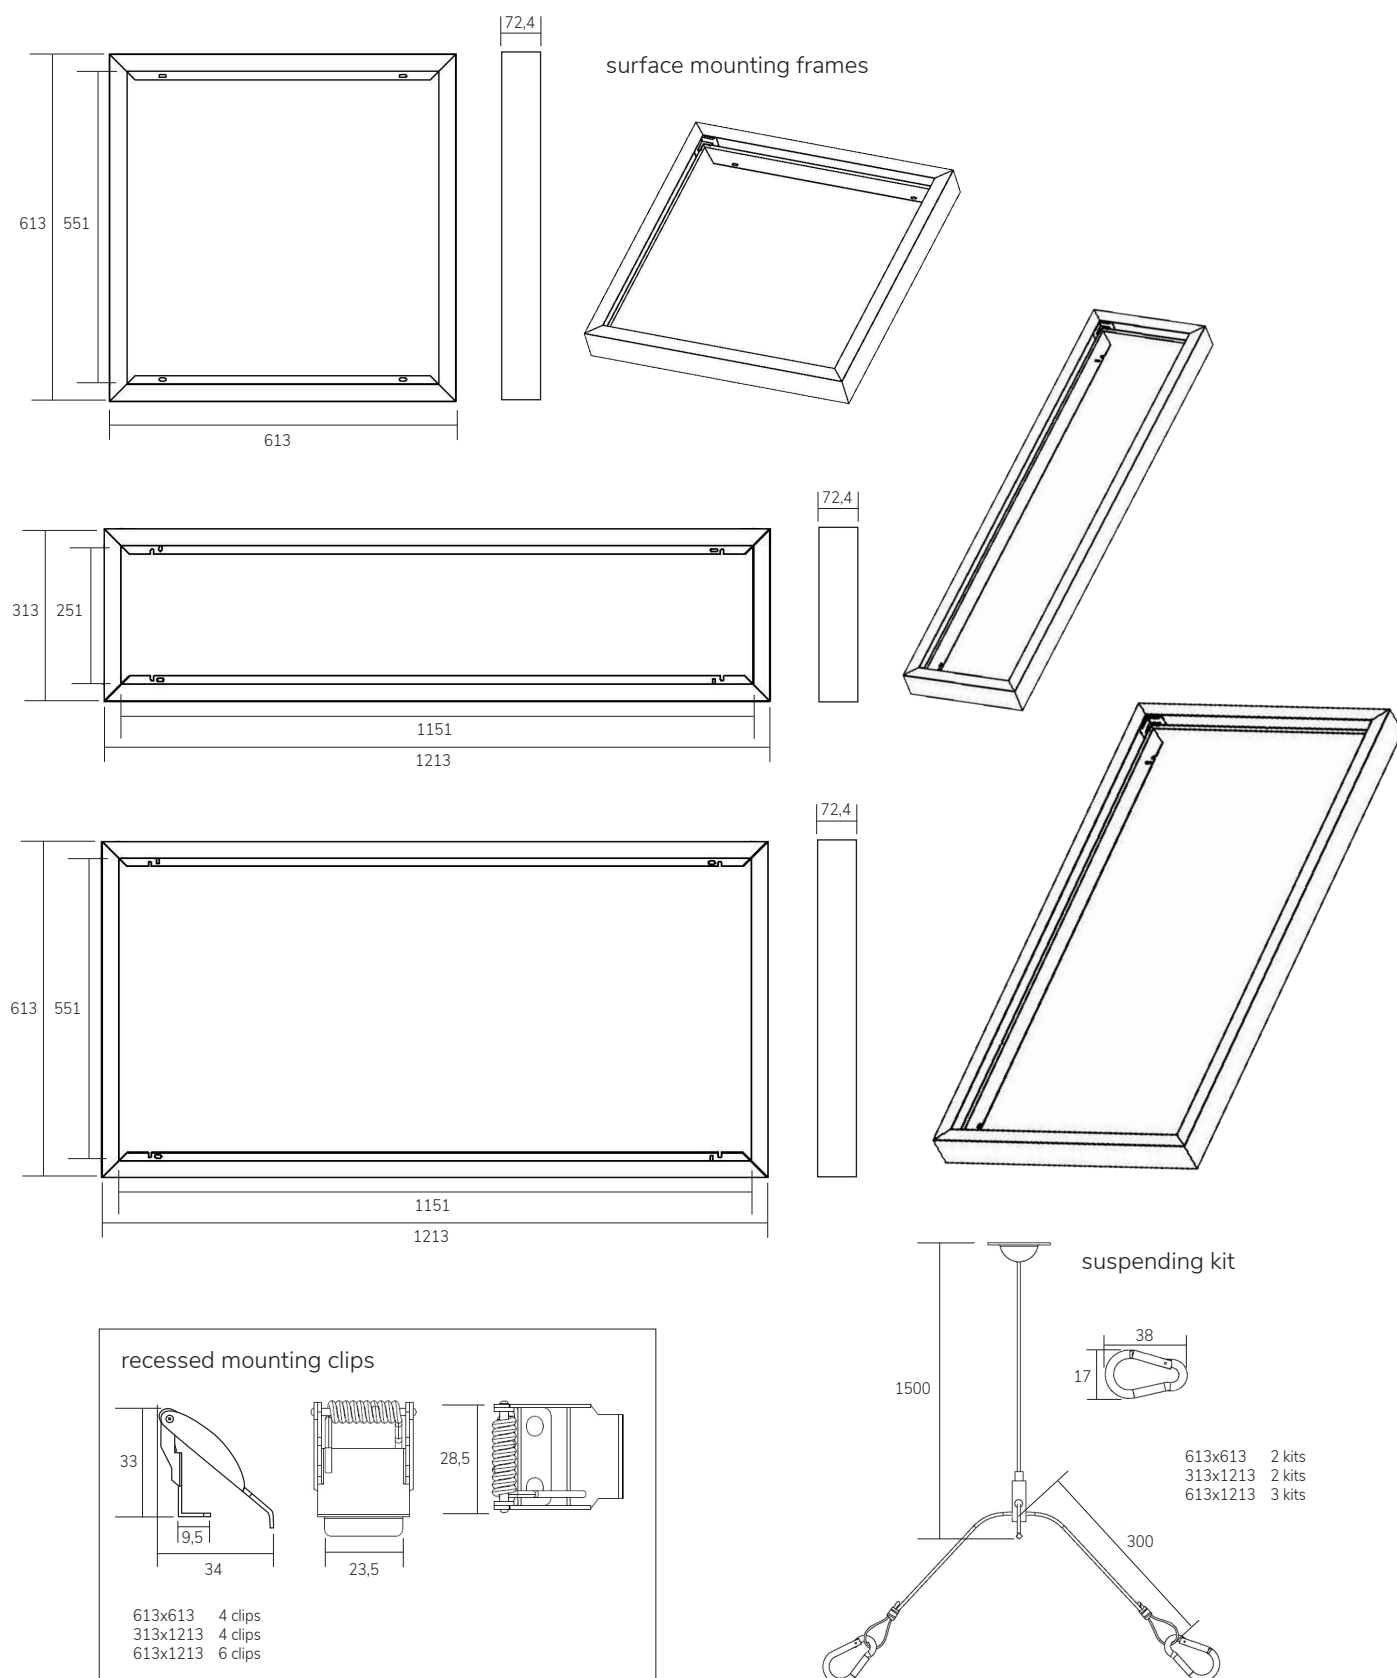



Key features and benefits

- Pendant cable set for suspension applications
- Surface mounted kit and Surface mounted kit basic for surface mounted applications
- Recessed frame and recessed clips to be used in recessed applications like plaster ceilings
- See the application matrix to see which accessory can be used with which panel





The FORTIMO trademark is owned by Signify Holding B.V.





- 60917.FRAME Surface mounting frame 613x613x73mm (one piece set)
 61305.FRAME Surface mounting frame 313x1213x73mm (one piece set)
 60983.FRAME Surface mounting frame 313x1213x73mm (one piece set)

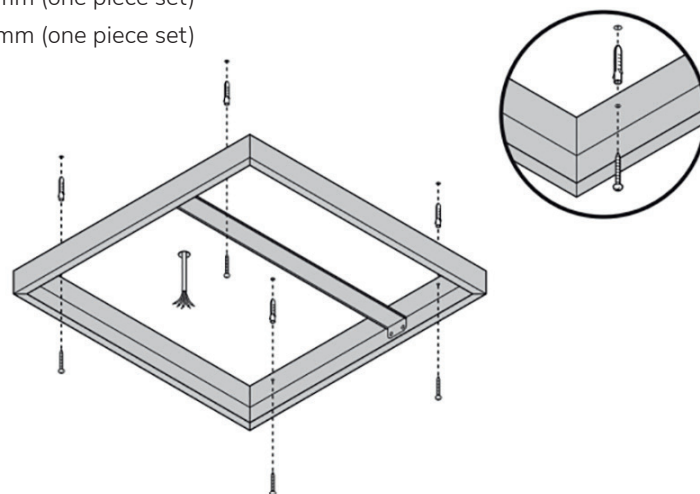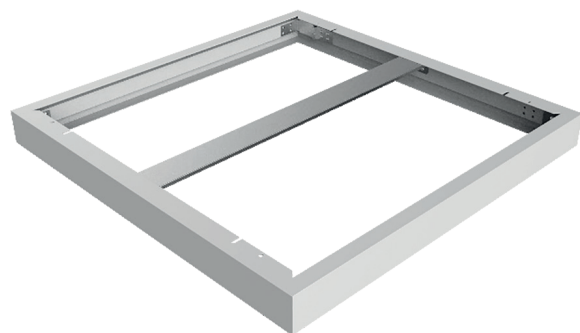

- 60917.FR.BASIC Surface mounting frame 613x613x73mm
 61305.FR.BASIC Surface mounting frame 313x1213x73mm
 60983.FR.BASIC Surface mounting frame 313x1213x73mm

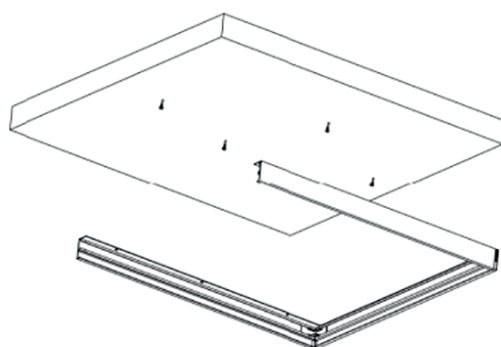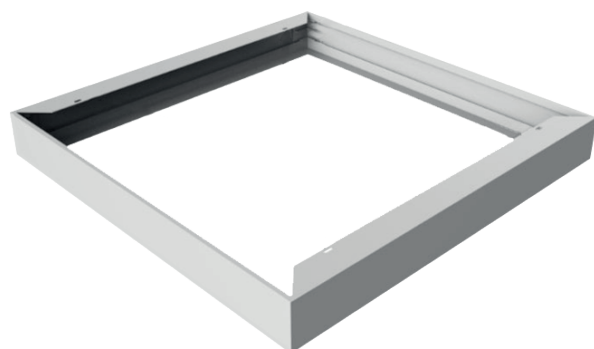

- 60917.GYPSUM Gypsum Ceiling frame 625x625 (suitable for 596x596 panels)

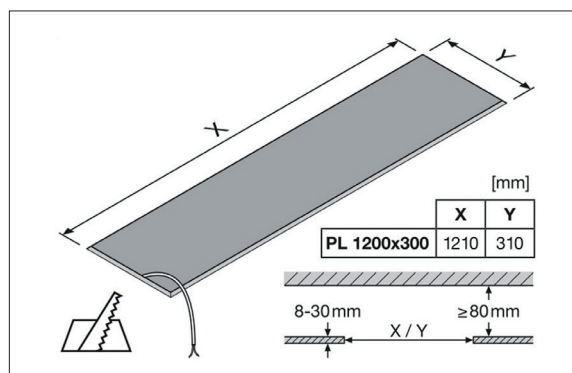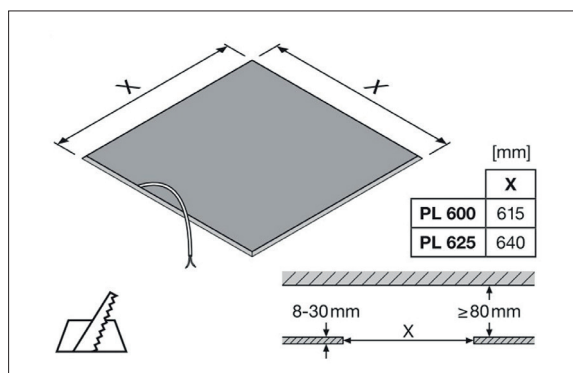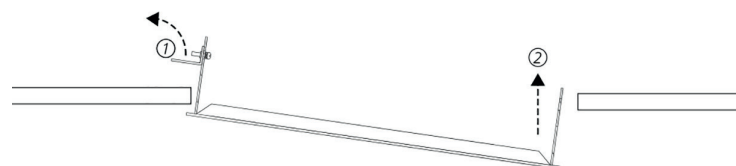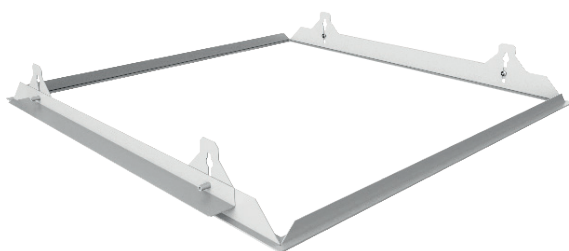

Signify

The FORTIMO trademark is owned by Signify Holding B.V.

60917.CLIPS

Clips Set for 596x596mm panels (4pc)

61305.CLIPS

Clips Set for 296x1196mm panels (4pc)

60983.CLIPS

Clips Set for 596x1196mm panels (6pc)

60917.SUSP

Suspension Set for 596x596mm panels (2pc)

61305.SUSP

Suspension Set for 296x1196mm panels (2pc)

60983.SUSP

Suspension Set for 596x1196mm panels (3pc)