


Zeer lage rechthoekig opbouw armatuur met twee ronde compacte LED spots, welke draai en kantelbaar zijn. Behuizing van witgelakt (RAL9003) plaatstaal en gegoten aluminium spots. Gefacetteerde hoogglans kunststof reflector met helder gehard glazen afscherming (UGR<19). Geschikt als accent- of basisverlichting in gangen en openbare ruimtes. Wordt geleverd inclusief interne driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Very low rectangular surface mounted luminaire with two round compact LED spots, which can be rotated and tilted. Housing made of white painted (RAL9003) sheet metal and cast aluminum spots. Faceted high-gloss plastic reflector with clear hardened glass shielding (UGR<19). Suitable as accent or general lighting in corridors and public areas. Comes with internal driver. Direct connection to 220-240VAC. Quick and easy assembly. Low maintenance and high life expectancy (50,000 hours L80B10). Colour stability, Mac Adam <3. Five year warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Gewicht (kg)	Artikel nr. Article no.	1-10V 1-10V	Dali Dali	Fase Dim Phase Dim
2x6w	3000k	2x600	>90	13°	1,2	29650.12.13.30	29650.12.13.31	29650.12.13.32	29650.12.13.33
2x6w	3000k	2x600	>90	25°	1,2	29650.12.25.30	29650.12.25.31	29650.12.25.32	29650.12.25.33
2x6w	3000k	2x600	>90	40°	1,2	29650.12.40.30	29650.12.40.31	29650.12.40.32	29650.12.40.33

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

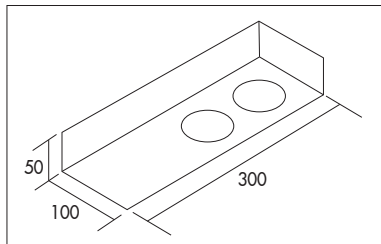

OPBOUW DOWNLIGHTS SURFACE MOUNTED DOWNLIGHTS

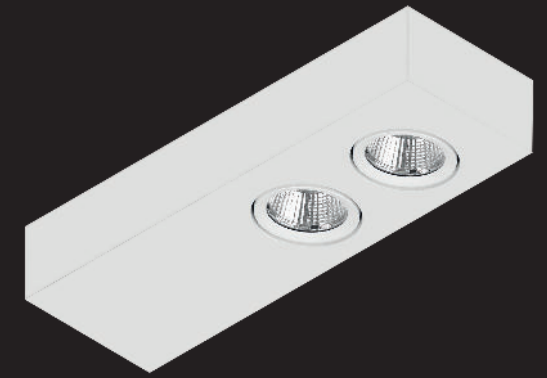


Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)



29650.12.13.30
2x6w 3000K
2x600 lumen 13°