Grid 40 RECESSED

PF>0,95 IP40

Inlegmodule met hoog armatuur rendement 145lm/w met standaard afmetingen voor systeemplafonds (M600) of gipsplafonds. Vervaardigd uit wit gelakt (RAL 9003) plaatstaal met Uv-bestendige kunststof reflectoren met interne lens techniek (UGR<19). Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Insert module with high efficiency 145lm/w with standard measurements for suspended ceilings (M600) or plasterboard ceilings. Housing made of white painted sheet metal (RAL 9003) with UV-resistant plastic reflectors with internal lens technology (UGR<19). Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**LED rij** *LED row*	**B (mm)** *W (mm)*	**L (mm)** *L (mm)*	**H (mm)** *H (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
8W	3000k	1100	>80	1	295	595	45	2,5	1/3	61298WA.8.30	61298WA.8.32
15W	3000k	2065	>80	1	295	595	45	2,5	1/3	61298WA.15.30	61298WA.15.32
20W	3000k	2755	>80	2	595	595	45	5,0	1/3	61298WB.20.30	61298WB.20.32
30W	3000k	4130	>80	2	595	595	45	5,0	1/3	61298WB.30.30	61298WB.30.32
20W	3000k	2755	>80	1	295	1195	45	5,0	1/3	61298WC.20.30	61298WC.20.32
30W	3000k	4130	>80	1	295	1195	45	5,0	1/3	61298WC.30.30	61298WC.30.32
19W	3000k	2615	>80	1	295	1495	45	6,5	1/3	61298WD.19.30	61298WD.19.32
37,5W	3000k	5165	>80	1	295	1495	45	6,5	1/3	61298WD.37.30	61298WD.37.32
8W	4000k	1160	>80	1	295	595	45	2,5	1/3	61298WA.8.40	61298WA.8.42
15W	4000k	2175	>80	1	295	595	45	2,5	1/3	61298WA.15.40	61298WA.15.42
20W	4000k	2900	>80	2	595	595	45	5,0	1/3	61298WB.20.40	61298WB.20.42
30W	4000k	4350	>80	2	595	595	45	5,0	1/3	61298WB.30.40	61298WB.30.42
20W	4000k	2900	>80	1	295	1195	45	5,0	1/3	61298WC.20.40	61298WC.20.42
30W	4000k	4350	>80	1	295	1195	45	5,0	1/3	61298WC.30.40	61298WC.30.42
19W	4000k	2755	>80	1	295	1495	45	6,5	1/3	61298WD.19.40	61298WD.19.42
37,5W	4000k	5435	>80	1	295	1495	45	6,5	1/3	61298WD.37.40	61298WD.37.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*




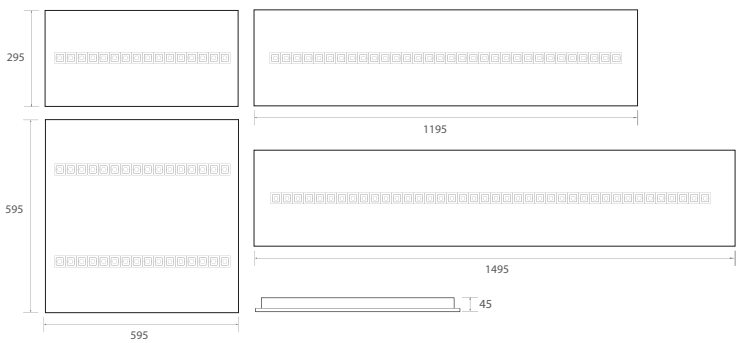



Opties:
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur

Optional:
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*



61298WA.8.30
8w 3000k 1100lm
ηLB 100%

melis lighting