Grid Clima 40

PF>0,95 IP40

Inlegmodule met hoog armatuur rendement 140lm/w. Vervaardigd uit wit gelakt (RAL 9003) plaatstaal met Uv-bestendige kunststof reflectoren met interne lens techniek (UGR<19). Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Insert module with high efficiency 140lm/w. Housing made of white painted sheet metal (RAL 9003) with UV-resistant plastic reflectors with internal lens technology (UGR<19). Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage Watts	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**LED rij** *LED row*	**B (mm)** *W (mm)*	**L (mm)** *L (mm)*	**H (mm)** *H (mm)*	**Gewicht (kg)** *Weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
7W	3000k	931	>80	1	40	280	45	0,4	1/3	61424WA.7.30_	61424WA.7.32_
14W	3000k	1862	>80	1	40	559	45	0,8	1/3	61424WB.14.30_	61424WB.14.32_
21W	3000k	2793	>80	1	40	839	45	1,2	1/3	61424WC.21.30_	61424WC.21.32_
28W	3000k	3724	>80	1	40	1118	45	1,6	1/3	61424WD.28.30_	61424WD.28.32_
35W	3000k	4655	>80	1	40	1398	45	2,0	1/3	61424WE.35.30_	61424WE.35.32_
42W	3000k	5586	>80	1	40	1677	45	2,4	1/3	61424WF.42.30_	61424WF.42.32_
7W	4000k	980	>80	1	40	280	45	0,4	1/3	61424WA.7.40_	61424WA.7.42_
14W	4000k	1960	>80	1	40	559	45	0,8	1/3	61424WB.14.40_	61424WB.14.42_
21W	4000k	2940	>80	1	40	839	45	1,2	1/3	61424WC.21.40_	61424WC.21.42_
28W	4000k	3920	>80	1	40	1118	45	1,6	1/3	61424WD.28.40_	61424WD.28.42_
35W	4000k	4900	>80	1	40	1398	45	2,0	1/3	61424WE.35.40_	61424WE.35.42_
42W	4000k	5880	>80	1	40	1677	45	2,4	1/3	61424WF.42.40_	61424WF.42.42_

* Lichtstroom van armatuur, tolerantie van +/- 10%

** Luminaire luminous flux, tolerance of +/- 10%*


61424WA.7.30_ _ A of B

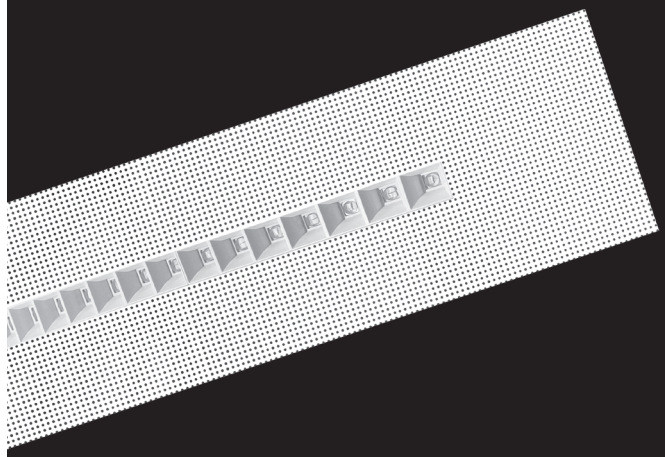


Opties:
- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur


Optional:
- *GST18i3® connector + BST14i2 connector*
- *GST18i5® connector*
- *Different RAL colour*

A Ceiling Bracket

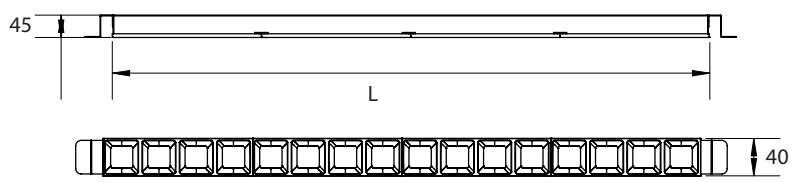

B Crossbar Bracket

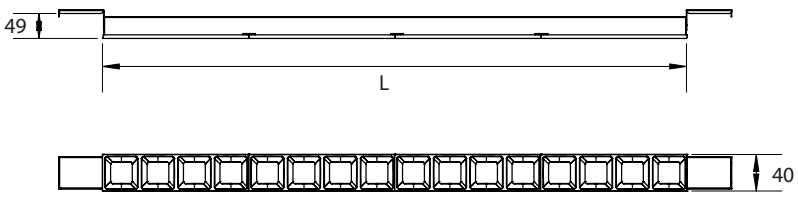



61424WC.7.30
7w 3000k 931lm
ηLB 100%

melis lighting