Grid Clima 70

PF>0,95 IP40

Inleg armatuur met hoog armatuur rendement 140lm/w met standaard afmetingen voor klimaatplafonds. Vervaardigd uit wit gelakt (RAL 9003) plaatstaal met Uv-bestendige kunststof reflectoren met interne lens techniek (UGR<19). Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Inclusief aansluit snoer (0,5m) met GST18i3® stekker. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Recessed luminaire with high efficiency 140lm/w with standard measurements for climate ceilings. Housing made of white painted sheet metal (RAL 9003) with UV-resistant plastic reflectors with internal lens technology (UGR<19). Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Including connection cable (0.5m) with GST18i3® plug. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**B (mm)** *W (mm)*	**L (mm)** *L (mm)*	**H (mm)** *H (mm)*	**Gewicht (kg)** *weight (kg)*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
12W	3000k	1687	>80	71	569	54	1,5	1/3	61392WA.12.30_	61392WA.12.32_
15W	3000k	2109	>80	71	569	54	1,5	1/3	61392WA.15.30_	61392WA.15.32_
17W	3000k	2390	>80	71	569	54	1,5	1/3	61392WA.17.30_	61392WA.17.32_
18W	3000k	2531	>80	71	853	54	1,9	1/3	61392WB.18.30_	61392WB.18.32_
22W	3000k	3093	>80	71	853	54	1,9	1/3	61392WB.22.30_	61392WB.22.32_
26W	3000k	3656	>80	71	853	54	1,9	1/3	61392WB.26.30_	61392WB.26.32_
24W	3000k	3374	>80	71	1137	54	2,4	1/3	61392WC.24.30_	61392WC.24.32_
29W	3000k	4077	>80	71	1137	54	2,4	1/3	61392WC.29.30_	61392WC.29.32_
34W	3000k	4780	>80	71	1137	54	2,4	1/3	61392WC.34.30_	61392WC.34.32_
30W	3000k	4218	>80	71	1421	54	2,4	1/3	61392WD.30.30_	61392WD.30.32_
36W	3000k	5062	>80	71	1421	54	2,4	1/3	61392WD.36.30_	61392WD.36.32_
43W	3000k	6046	>80	71	1421	54	2,4	1/3	61392WD.43.30_	61392WD.43.32_
12W	4000k	1776	>80	71	569	54	1,5	1/3	61392WA.12.40_	61392WA.12.42_
15W	4000k	2220	>80	71	569	54	1,5	1/3	61392WA.15.40_	61392WA.15.42_
17W	4000k	2516	>80	71	569	54	1,5	1/3	61392WA.17.40_	61392WA.17.42_
18W	4000k	2664	>80	71	853	54	1,9	1/3	61392WB.18.40_	61392WB.18.42_
22W	4000k	3256	>80	71	853	54	1,9	1/3	61392WB.22.40_	61392WB.22.42_
26W	4000k	3848	>80	71	853	54	1,9	1/3	61392WB.26.40_	61392WB.26.42_
24W	4000k	3552	>80	71	1137	54	2,4	1/3	61392WC.24.40_	61392WC.24.42_
29W	4000k	4292	>80	71	1137	54	2,4	1/3	61392WC.29.40_	61392WC.29.42_
34W	4000k	5032	>80	71	1137	54	2,4	1/3	61392WC.34.40_	61392WC.34.42_
30W	4000k	4440	>80	71	1421	54	2,4	1/3	61392WD.30.40_	61392WD.30.42_
36W	4000k	5328	>80	71	1421	54	2,4	1/3	61392WD.36.40_	61392WD.36.42_
43W	4000k	6364	>80	71	1421	54	2,4	1/3	61392WD.43.40_	61392WD.43.42_

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

BRACKET:

61392WA.12.30_ _ A, B or C

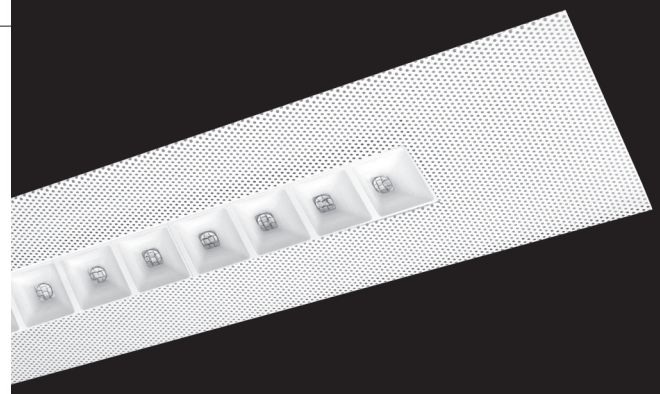


Opties:
- GST18i5® connector
- Andere RAL kleur

Optional:
- *GST18i5® connector*
- *Different RAL colour*



High quality - UV resistant
PC plastic bowls with lenses
for glare control UGR<19




61392WA.12.30
12w 3000k 1687lm
ηLB 100%


melis lighting



A Ceiling Bracket

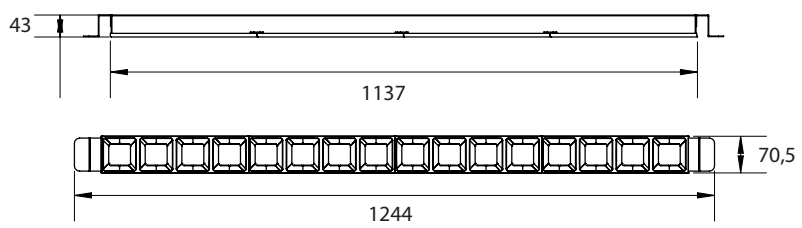

B Crossbar Bracket

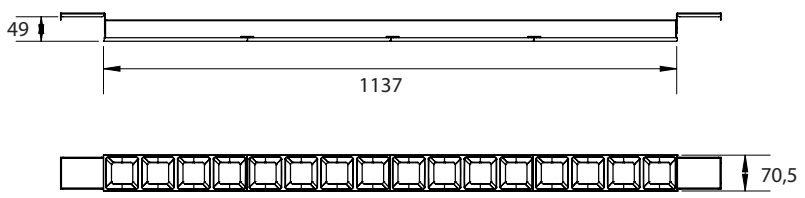

C Ceiling Bracket

