Grid Surface

PF>0,95 IP20


Opbouw armatuur met hoog armatuur rendement 125lm/w met standaard afmetingen voor systeemplafonds (M600) of gipsplafonds. Vervaardigd uit witgelakt (RAL 9003) plaatstaal met UV-bestendige PC plastic kommen (UGR<19). Hierdoor zeer goed toepasbaar in kantoren, klaslokalen, en andere werkruimtes waar hoge eisen aan comfort worden gesteld. Onderhoudsarm en hoge levensduurverwachting (100.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.


Surface mounted luminaire with high efficiency 125lm/w with standard measurements for suspended ceilings (M600) or plasterboard ceilings. Housing made of white painted (RAL 9003) sheet metal with UV-resistant PC plastic bowls (UGR<19). Therefore very suitable for offices, classrooms and other working areas where there are high demands for comfortable light. Low maintenance and high life expectancy (100.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**LED rij** *LED row*	**B (mm)** *B (mm)*	**L (mm)** *L (mm)*	**H (mm)** *H (mm)*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
8W	3000k	1000	>80	1	300	300	45	2,8	1/3	61232WA.8.30	61232WA.8.32
8W	3000k	1000	>80	2	300	300	45	2,8	1/3	61232WB.8.30	61232WB.8.32
16W	3000k	2000	>80	2	300	300	45	3,3	1/3	61232WB.16.30	61232WB.16.32
16W	3000k	2000	>80	2	300	600	45	3,3	1/3	61232WC.16.30	61232WC.16.32
16W	3000k	2000	>80	2	600	600	45	6,6	1/3	61232WD.16.30	61232WD.16.32
24W	3000k	3000	>80	2	600	600	45	6,6	1/3	61232WD.24.30	61232WD.24.32
32W	3000k	4000	>80	2	600	600	45	6,6	1/3	61232WD.32.30	61232WD.32.32
16W	3000k	2000	>80	1 short	300	1200	45	6,6	1/3	61232WF.16.30	61232WF.16.32
24W	3000k	3000	>80	1 short	300	1200	45	6,6	1/3	61232WF.24.30	61232WF.24.32
24W	3000k	3000	>80	3	600	600	45	6,6	1/3	61232WG.24.30	61232WG.24.32
36W	3000k	4500	>80	3	600	600	45	6,6	1/3	61232WG.36.30	6123WG.36.32
48W	3000k	6000	>80	3	600	600	45	6,6	1/3	61232WG.48.30	61232WG.48.32
16W	3000k	2000	>80	1 long	300	1200	45	6,6	1/3	61232WH.16.30	61232WH.16.32
24W	3000k	3000	>80	1 long	300	1200	45	6,6	1/3	61232WH.24.30	61232WH.24.32
32W	3000k	4000	>80	1 long	300	1200	45	6,6	1/3	61232WH.32.30	61232WH.32.32
8W	4000k	1050	>80	1	300	300	45	2,8	1/3	61232WA.8.40	61232WA.8.42
8W	4000k	1050	>80	2	300	300	45	2,8	1/3	61232WB.8.40	61232WB.8.42
16W	4000k	2100	>80	2	300	300	45	3,3	1/3	61232WB.16.40	61232WC.16.42
16W	4000k	2100	>80	2	300	600	45	3,3	1/3	61232WC.16.40	61232WB.16.42
16W	4000k	2100	>80	2	600	600	45	6,6	1/3	61232WD.16.40	61232WD.16.42
24W	4000k	3150	>80	2	600	600	45	6,6	1/3	61232WD.24.40	61232WD.24.42
32W	4000k	4200	>80	2	600	600	45	6,6	1/3	61232WD.32.40	61232WD.32.42
16W	4000k	2100	>80	1 short	300	1200	45	6,6	1/3	61232WF.16.40	61232WF.16.42
24W	4000k	3150	>80	1 short	300	1200	45	6,6	1/3	61232WF.24.40	61232WF.24.42
24W	4000k	3150	>80	3	600	600	45	6,6	1/3	61232WG.24.40	61232WG.24.42
36W	4000k	4725	>80	3	600	600	45	6,6	1/3	61232WG.36.40	61232WG.36.42
48W	4000k	6300	>80	3	600	600	45	6,6	1/3	61232WG.48.40	61232WG.48.42
16W	4000k	2100	>80	1 long	300	1200	45	6,6	1/3	61232WH.16.40	61232WH.16.42
24W	4000k	3150	>80	1 long	300	1200	45	6,6	1/3	61232WH.24.40	61232WH.24.42
32W	4000k	4200	>80	1 long	300	1200	45	6,6	1/3	61232WH.32.40	61232WH.32.42

* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*








High quality - UV resistant
PC plastic bowls for glare control
UGR<17

OPBOUW ARMATUREN

SURFACE MOUNTED LUMINAIRES







61232WH.48.40
48w 4000k 6300lm
ηLB 100%

melis lighting


Grid Surface

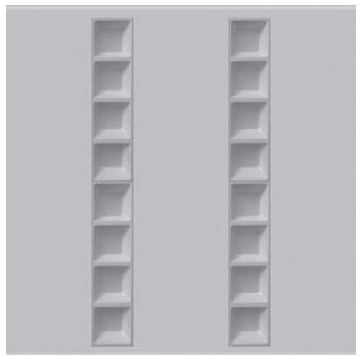

600x600mm 2-row

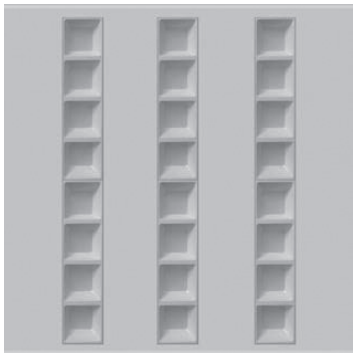

600x600mm 3-row

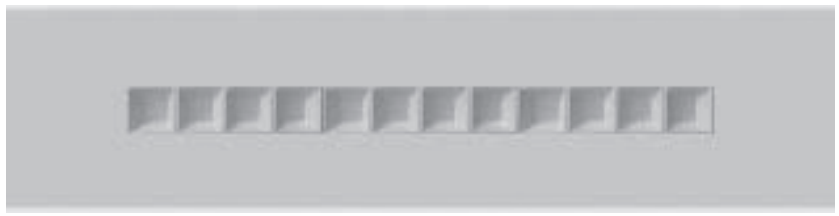

300x1200mm 1-row short




300x1200mm 1-row long



300x300mm
1-row



300x300mm
2-row

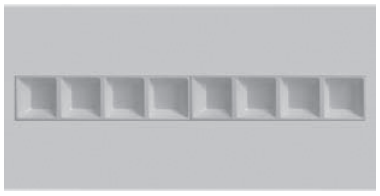

300x600mm 1-row