






Tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>84°) en lage verblinding op maximaal vermogen (UGR<22). Hoog rendement aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Behuizing van verzinkt plaatstaal en verwisselbare aluminium afdekking (RAL 9003). Zeer geschikt als basis verlichting in theaters en musea. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Tunable white modular LED downlight with shallow build-in height and a satinated PS Microprism diffuser. Wide beam angle (>84°) and low glare at maximum power (UGR<22). High efficiency aluminum reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500k. Housing made of galvanised sheet metal and white painted (RAL 9003) aluminum trim. Very suitable as general lighting in theatres and museums. Delivered including external DALI driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1285-1460	>92	2,7	1/3	21004W.13.TW	21004W.13.TWC
19w	2700-6500k	1700-1930	>92	2,7	1/3	21004W.19.TW	21004W.19.TWC
26w	2700-6500k	2240-2545	>92	2,7	1/3	21004W.26.TW	21004W.26.TWC
34w	2700-6500k	2770-3145	>92	2,7	1/3	21004W.34.TW	21004W.34.TWC
39w	2700-6500k	3070-3485	>92	2,7	1/3	21004W.39.TW	21004W.39.TWC
45w	2700-6500k	3365-3815	>92	2,7	1/3	21004W.45.TW	21004W.45.TWC
50w	2700-6500k	3645-4135	>92	2,7	1/3	21004W.50.TW	21004W.50.TWC

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

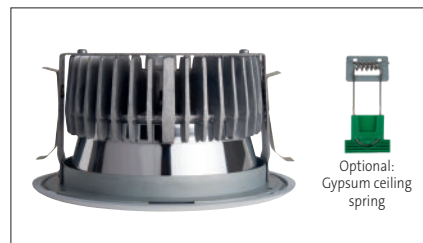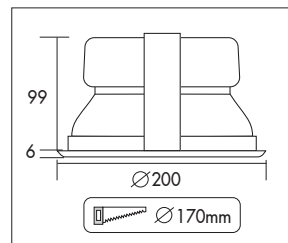


Opties:

- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Andere RAL kleur
- Zijveer

Options:

- GST18i3® connector + BST14i2 connector
- GST18i5® connector
- Different RAL color
- Side spring



21004W.34.TW
34w 2700-6500k 2770-3145lm
ηLB 84%

