

Holon 200




Professionele ronde modulaire LED downlight met gesatineerde PS Microprisma afscherming, brede bundel (>84°) en lage verblinding. Interne hoog rendement aluminium reflector. Voorzien van LED met hoge lichtopbrengst (max. 138lm/w, CRI>93). Behuizing van verzinkt plaatstaal en verwisselbare aluminium afdekring (RAL 9003). Zeer geschikt als basis verlichting in scholen, museums, kantoren, winkels en ziekenhuizen. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage. Onderhoudsarm en hoge levensduurverwachting. Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Professional powerful modular LED downlight with satinated PS Microprism diffuser, wide beam angle (>84°) and low glare. Internal high efficiency aluminum reflector. Integrated LED with high output (max. 138lm/w, CRI>93). Housing made of galvanised sheet metal and white painted (RAL 9003) aluminum trim. Very suitable as general lighting schools, museums, offices and shops. Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikelnr. Article number	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2
5w	3000k	653	>93	150	2,7	1/3	21012W.0030	21012W.0130	21012W.0230
8w	3000k	1085	>93	250	2,7	1/3	21017W.0030	21017W.0130	21017W.0230
12w	3000k	1503	>93	350	2,7	1/3	21004W.0030	21004W.0130	21004W.0230
17w	3000k	2111	>93	500	2,7	1/3	21005W.0030	21005W.0130	21005W.0230
25w	3000k	2881	>93	700	2,7	1/3	21006W.0030	21006W.0130	21006W.0230
33w	3000k	3606	>93	900	2,7	1/3	21007W.0030	21007W.0130	21007W.0230
39w	3000k	4119	>93	1050	2,7	1/3	21014W.0030	21014W.0130	21014W.0230
5w	4000k	653	>93	150	2,7	1/3	21012W.0040	21012W.0140	21012W.0240
8w	4000k	1085	>93	250	2,7	1/3	21017W.0040	21017W.0140	21017W.0240
12w	4000k	1502	>93	350	2,7	1/3	21004W.0040	21004W.0140	21004W.0240
17w	4000k	2111	>93	500	2,7	1/3	21005W.0040	21005W.0140	21005W.0240
25w	4000k	2881	>93	700	2,7	1/3	21006W.0040	21006W.0140	21006W.0240
33w	4000k	3606	>93	900	2,7	1/3	21007W.0040	21007W.0140	21007W.0240
39w	4000k	4119	>93	1050	2,7	1/3	21014W.0040	21014W.0140	21014W.0240

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

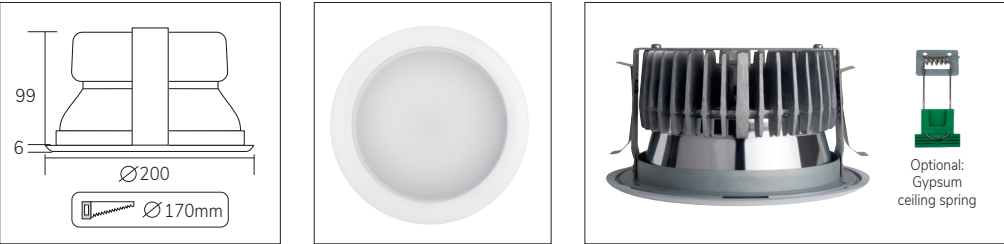

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




Opties:

- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White
- Zijveer

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White
- Side spring



21012W.0030
5w 3000K 653lm
ηLB 100%

melis lighting