


Slank indirect LED pendel armatuur met hoog rendement LED technologie (>160lm/w). Voorzien van 90 graden lens techniek met 93% efficiency. Vervaardigd uit witgelakt (RAL 9003) geëxtrudeerd aluminium. Verblindingsvrij (UGR<10). Zeer goed toepasbaar in kantoren, klaslokalen, en andere werkkruimtes waar de hoogste eisen aan comfort worden gesteld. Voor optimaal rendement dient de InDi minimaal 30cm onder een helder wit plafond gehangen te worden. Voorzien van 1 meter staakabel en 2 meter transparant snoer. Met optioneel ingebouwde sensor functioneert de InDi volledig autonoom en reageert het op intredend daglicht en beweging. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10). Kleur stabiliteit, Mac Adam <3. Garantie 5 jaar.

Slim suspended luminaire with high efficiency LED technology (>160lm/w). Fitted with 90 degree lenses (>93% efficiency). Housing made of white painted (RAL 9003) extruded aluminium. Glare free (UGR<10). Very suitable for offices, classrooms and other working areas where there the highest demands for comfortable light are set. The InDi needs to be mounted at 30cm minimum distance from a bright white ceiling for optimal performance. Delivered including 1 meter steel cable and 2 meter transparent power cord. With optional build in sensor the luminaire will autonomously react to daylight and motion. Low maintenance and high life expectancy (50.000 hours L80B10). Colour stability, Mac Adam <3. Warranty 5 years.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI (Ra) CRI (Ra)	Lengte (mm) Length (mm)	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dali Dali	EasySense Sensor EasySense Sensor
40w	3000k	7.100	>80	1750	6	1	61017.3.0	61017.3.2	61017.3.S
73w	3000k	10.800	>80	1750	6	1	61017.3.0P	61017.3.2P	61017.3.SP
80w	3000k	14.200	>80	3450	12	1	61013.3.0	61013.3.2	61013.3.S
126w	3000k	19.300	>80	3450	12	1	61013.3.0P	61013.3.2P	61013.3.SP
40w	4000k	7.200	>80	1750	6	1	61017.4.0	61017.4.2	61017.4.S
73w	4000k	11.000	>80	1750	6	1	61017.4.0P	61017.4.2P	61017.4.SP
80w	4000k	14.400	>80	3450	12	1	61013.4.0	61013.4.2	61013.4.S
126w	4000k	20.000	>80	3450	12	1	61013.4.0P	61013.4.2P	61013.4.SP

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

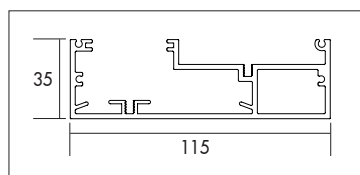


Opties:

1-10V dimbaar

Optional:

1-10V dimmable



61017.4.0

40w 4000k 7200lm
ηLB 100%