Lex

PF>0,9 IK08 IP65-66 RoHS

Slagvast water- en stofdicht IP65 LED armatuur met opalen afscherming (optioneel helder). Zeer hoog armatuur rendement (>131lm/w). Glasvezelversterkte, uv-bestendige behuizing (polyester) en diffuser uit PC met permanent gesealde sluiting en RVS ophangbeugel. Binnenreflector uit wit gelakt plaatstaal. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L80B10) of (35.000 uur L70 Ta. Max.+45ºC). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie (Ta.Max -20ºC).


Impact resistant water- and dust proof IP65 luminaire with high voltage LEDs. Fiberglass reinforced polyester, uv-resistant housing, opal PC diffuser (optionally clear), sealed for life and stainless steel suspension bracket. Inner reflector plate made of white painted sheet metal. High luminaire efficiency (>131lm/w). Low maintenance and high life expectancy (50.000 hours L80B10) or (35.000 hours L70 Ta Max +45ºC). Colour stability, Mac Adam <3. Warranty 5 years (Ta.Max -20ºC).


Wattage *Watts*	**Kleur** *Colour*	**Lumen*** *Lumen**	**CRI (Ra)** *CRI (Ra)*	**Lengte (mm)** *Length (mm)*	**Breedte (mm)** *Width (mm)*	**Hoogte (mm)** *Height (mm)*	**Ta.Max** *Ta.Max*	**kg** *kg*	**Noodvoorz. (u)** *Emergency (h)*	**Artikel nr.** *Article no.*	**Dali** *Dali*
12w	3000k	1425	>80	620	88	81	45	1,5	1/3	27114A.12.30	27114A.12.32
21w	3000k	2460	>80	620	88	81	35	1,5	1/3	27114A.21.30	27114A.21.32
28w	3000k	3590	>80	1190	88	81	45	3,0	1/3	27114B.28.30	27114B.28.32
39w	3000k	4825	>80	1190	88	81	35	3,0	1/3	27114B.39.30	27114B.39.32
35w	3000k	4495	>80	1490	88	81	45	3,8	1/3	27114C.35.30	27114C.35.32
49w	3000k	6040	>80	1490	88	81	35	3,8	1/3	27114C.49.30	27114C.49.32
42w	3000k	5385	>80	1790	88	81	45	4,5	1/3	27114D.42.30	27114D.42.32
70w	3000k	8985	>80	2950	88	81	45	7,0	1/3	27114E.70.30	27114E.70.32
12w	4000k	1500	>80	620	88	81	45	1,5	1/3	27114A.12.40	27114A.12.42
21w	4000k	2590	>80	620	88	81	35	1,5	1/3	27114A.21.40	27114A.21.42
28w	4000k	3780	>80	1190	88	81	45	3,0	1/3	27114B.28.40	27114B.28.42
39w	4000k	5080	>80	1190	88	81	35	3,0	1/3	27114B.39.40	27114B.39.42
35w	4000k	4730	>80	1490	88	81	45	3,8	1/3	27114C.35.40	27114C.35.42
49w	4000k	6360	>80	1490	88	81	35	3,8	1/3	27114C.49.40	27114C.49.42
42w	4000k	5670	>80	1790	88	81	45	4,5	1/3	27114D.42.40	27114D.42.42
70w	4000k	9460	>80	2950	88	81	45	7,0	1/3	27114E.70.40	27114E.70.42


* Lichtstroom van armatuur, tolerantie van +/- 10%

* *Luminaire luminous flux, tolerance of +/- 10%*

High Output variant beschikbaar / *High Output variant available*

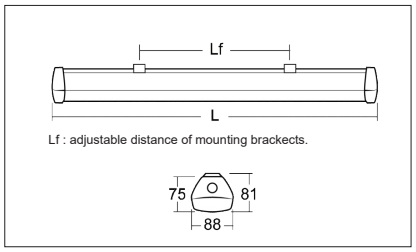

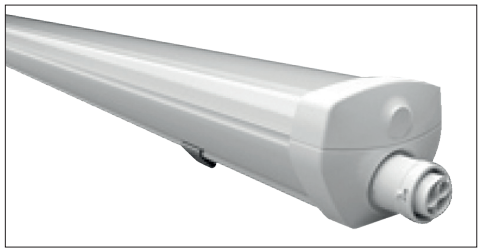

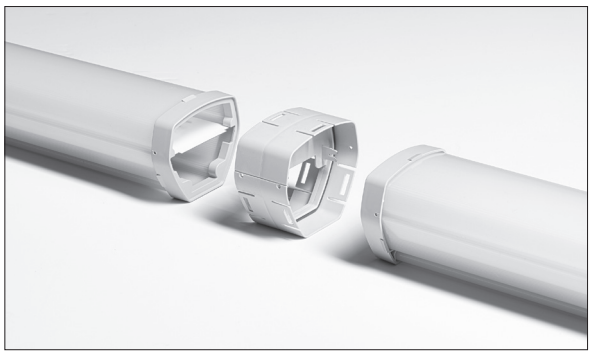

Koppelbaar in combinatie met doorvoerbedrading.


Linkable in combination with transit wiring.



Opties:
- PC clips
- IP66 Wieland / IP65 Stucchi connector
- 6500k
- Bewegingssensor
- Doorvoerbedrading

Optional:
- *PC clips*
- *IP66 Wieland / IP65 Stucchi connector*
- *6500k*
- *Motion sensor*
- *Through-wiring*





27114A.12.30
12w 1425lm 3000k
ηLB 100%

melis lighting