

Lybro 71 IP



IK07 IP65



Ronde compacte stofdichte en sproeiwater dichte (IP65) LED spot downlight. Behuizing en ring van gegoten aluminium met zeer hoogwaardige afwerking (RAL9003). Voorzien van een securitglas (IK08). Geschikt als accent- of basisverlichting voor buiten of als decoratieve spot in gangen en badkamers. Wordt geleverd inclusief externe driver. Verkrijgbaar met drie kleuren aluminium binnenconus (UGR<17). Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting (50.000 uur L90B10). Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round compact dustproof and spray water proof (IP65) LED spot light. Housing and bezel made of die casted aluminium with high grade finish (RAL 9003). Provided with safety glass (IK08). Faceted specular reflector with clear tempered glass diffuser. Available in three colours aluminium baffles (UGR<17). Suitable as accent or general lighting in outdoor areas or as decorative spot in corridors and bathrooms. External driver included. Direct connection to 220-240VAC. Low maintenance and high life expectancy (50.000 hours L90B10). Colour stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Graden Degree	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Artikel nr.** Article no.**	1-10V 1-10V	Dali Dali
3w	3000k	300	>90	12°	0,35	1/3	23000W.312.30_		
6w	3000k	590	>90	12°	0,35	1/3	23000W.612.30_		23000W.612.32_
9w	3000k	875	>90	12°	0,35	1/3	23000W.912.30_	23000W.912.31_	23000W.912.32_
3w	3000k	290	>90	24°	0,35	1/3	23000W.324.30_		
6w	3000k	565	>90	24°	0,35	1/3	23000W.624.30_		23000W.624.32_
9w	3000k	835	>90	24°	0,35	1/3	23000W.924.30_	23000W.924.31_	23000W.924.32_
3w	3000k	285	>90	38°	0,35	1/3	23000W.338.30_		
6w	3000k	550	>90	38°	0,35	1/3	23000W.638.30_		23000W.638.32_
9w	3000k	815	>90	38°	0,35	1/3	23000W.938.30_	23000W.938.31_	23000W.938.32_
3w	3000k	275	>90	60°	0,35	1/3	23000W.360.30_		
6w	3000k	540	>90	60°	0,35	1/3	23000W.660.30_		23000W.660.32_
9w	3000k	800	>90	60°	0,35	1/3	23000W.960.30_	23000W.960.31_	23000W.960.32_

* Lichtstroom van armatuur, tolerantie van +/- 10%



* Luminaire luminous flux, tolerance of +/- 10%

** Voeg binnenconus code toe aan artikelnummer

** Add baffle code to article no.

Conus / Baffle Code

Zwart / Black	B
Wit / White	W
Goud / Gold	G

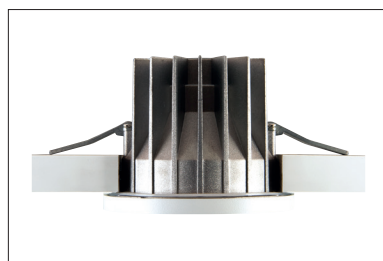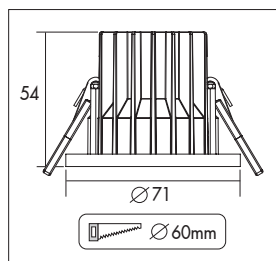

SPOTS SPOTS




Opties:

- 1,5 meter snoer met 3-polige Schuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- 2700K, 3500k, 5000k of hogere CRI waarde 97
- Vlees, brood of Crisp White
- Afdekring in andere RAL kleur

Options:

- 1,5m cable with Schuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- 2700k, 3500k, 5000k or higher CRI value 97
- Meat, bread or Crisp White
- Bezel in different RAL Colour



23000W.938.30B

Black Baffle

9w 3000k 38° 815lm

ηLB 66%

melis lighting