

Marici 120 Darklight






Ronde miniatuur LED downlight met een lage inbouwhoogte. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met medium bundel (>50°) en hoge efficiency (max 147lm/w) met CRI>80. Zeer lage verblinding (UGR<19, 5-19w) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) aluminium behuizing. Snelle montage met veren. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting. Kleur stabiliteit, Mac Adam <3. Vijf jaar garantie.

Round miniature LED downlight with shallow build-in height. Trumpet shaped darklight reflector made of 99,98% specular aluminium with medium beam angle (>50°) and high efficiency (max 147lm/w) with CRI>80. Very low glare (UGR<19, 5-19w) and minimal brightness due to unique darklight reflector design. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. Color stability, Mac Adam <3. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	Amperage (mA) Amperage (mA)	kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali Dali	Casambi Casambi
5w	3000k	747	140	0,6	1/3	23007W.05.30	23007W.05.31	23007W.05.32	23007W.05.35
9w	3000k	1202	250	0,6	1/3	23007W.09.30	23007W.09.31	23007W.09.32	23007W.09.35
13w	3000k	1629	350	0,6	1/3	23007W.13.30	23007W.13.31	23007W.13.32	23007W.13.35
19w	3000k	2227	500	0,6	1/3	23007W.19.30	23007W.19.31	23007W.19.32	23007W.19.35
28w	3000k	2899	700	0,6	1/3	23007W.28.30	23007W.28.31	23007W.28.32	23007W.28.35
5w	4000k	781	140	0,6	1/3	23007W.05.40	23007W.05.41	23007W.05.42	23007W.05.45
9w	4000k	1262	250	0,6	1/3	23007W.09.40	23007W.09.41	23007W.09.42	23007W.09.45
13w	4000k	1709	350	0,6	1/3	23007W.13.40	23007W.13.41	23007W.13.42	23007W.13.45
19w	4000k	2329	500	0,6	1/3	23007W.19.40	23007W.19.41	23007W.19.42	23007W.19.45
28w	4000k	3047	700	0,6	1/3	23007W.28.40	23007W.28.41	23007W.28.42	23007W.28.45

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

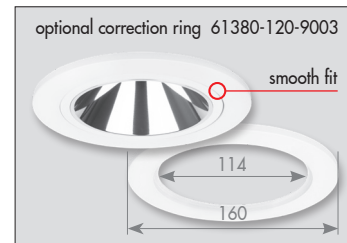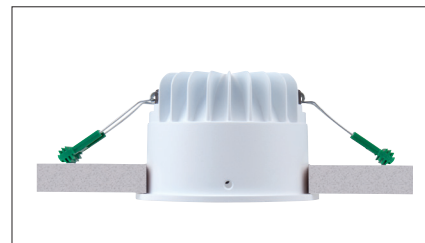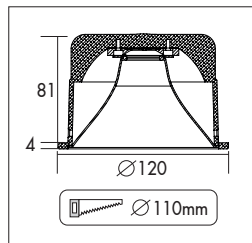

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



Opties:


- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k of hogere CRI waarde 90/97
- Vlees, brood of Crisp White

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k or higher CRI values 90/97
- Meat, bread or Crisp White



Levensduurverwachting (uren) Life expectancy (hours)		
Watt	L80B10	L90B10
5	154.000	73.000
9	149.000	70.000
13	126.000	60.000
19	112.000	53.000
28	92.000	44.000



23007W.05.30

5w 3000k 747lm
ηLB 84%

melis lighting