

Marici 120 Darklight






Ronde miniatuur LED downlight met een lage inbouwhoogte. Voorzien van trompetvormige darklight reflector van 99,98% hoogglans aluminium met medium bundel (>50°) en hoge efficiency (max 152lm/w) met **CRI>93 (R9>88)**. Zeer lage verblinding (UGR<19, 5-19w) en minimale helderheid door uniek darklight reflector ontwerp. Wit gelakte (RAL 9003) aluminium behuizing. Snelle montage met veren. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round miniature LED downlight with shallow build-in height. Trumpet shaped darklight reflector made of 99,98% specular aluminium with medium beam angle (>50°) and high efficiency (max 152lm/w) with **CRI>93 (R9>88)**. Very low glare (UGR<19, 5-19w) and minimal brightness due to unique darklight reflector design. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

| Wattage<br>Watts | Kleur<br>Colour | Lumen*<br>Lumen* | CRI<br>CRI | Amperage (mA)<br>Amperage (mA) | kg  | Noodvoorz. (u)<br>Emergency (h) | Artikel nr.<br>Article no. | Dimbaar (1-10V)<br>Dimmable (1-10V) | Dali-2<br>Dali-2 | Casambi<br>Casambi |
|------------------|-----------------|------------------|------------|--------------------------------|-----|---------------------------------|----------------------------|-------------------------------------|------------------|--------------------|
| 5w               | 3000k           | 759              | >93        | 150                            | 0,6 | 1/3                             | 23007W.05.30               | 23007W.05.31                        | 23007W.05.32     | 23007W.05.35       |
| 9w               | 3000k           | 1208             | >93        | 250                            | 0,6 | 1/3                             | 23007W.09.30               | 23007W.09.31                        | 23007W.09.32     | 23007W.09.35       |
| 13w              | 3000k           | 1628             | >93        | 350                            | 0,6 | 1/3                             | 23007W.13.30               | 23007W.13.31                        | 23007W.13.32     | 23007W.13.35       |
| 19w              | 3000k           | 2344             | >93        | 500                            | 0,6 | 1/3                             | 23007W.19.30               | 23007W.19.31                        | 23007W.19.32     | 23007W.19.35       |
|                  |                 |                  |            |                                |     |                                 |                            |                                     |                  |                    |
| 5w               | 4000k           | 759              | >93        | 150                            | 0,6 | 1/3                             | 23007W.05.40               | 23007W.05.41                        | 23007W.05.42     | 23007W.05.45       |
| 9w               | 4000k           | 1208             | >93        | 250                            | 0,6 | 1/3                             | 23007W.09.40               | 23007W.09.41                        | 23007W.09.42     | 23007W.09.45       |
| 13w              | 4000k           | 1628             | >93        | 350                            | 0,6 | 1/3                             | 23007W.13.40               | 23007W.13.41                        | 23007W.13.42     | 23007W.13.45       |
| 19w              | 4000k           | 2344             | >93        | 500                            | 0,6 | 1/3                             | 23007W.19.40               | 23007W.19.41                        | 23007W.19.42     | 23007W.19.45       |

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

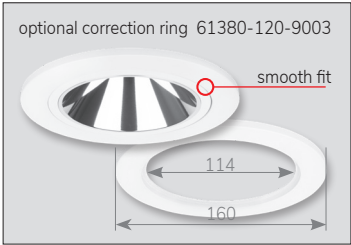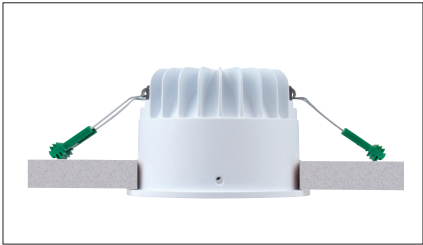

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS



Opties:


- 1,5 meter snoer met 3-polige Shuko stekker
- 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
- 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
- 0,5 meter snoer + GST18i5® Blue connector male (dim)
- Andere RAL kleur
- 2700K, 3500k, 5000k
- Vlees, brood of Crisp White

Options:

- 1,5m cable with Shuko 3-pin plug
- 0,5 meter cable + GST18i3® connector (non - dimmable)
- 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
- 0,5 meter cable + GST18i5® Blue connector male (dim)
- Different RAL color
- 2700k, 3500k, 5000k
- Meat, bread or Crisp White



| Levensduurverwachting (uren)<br>Life expectancy (hours) |         |        |
|---------------------------------------------------------|---------|--------|
| Watt                                                    | L80B10  | L90B10 |
| 5                                                       | 154.000 | 73.000 |
| 9                                                       | 149.000 | 70.000 |
| 13                                                      | 126.000 | 60.000 |
| 19                                                      | 112.000 | 53.000 |



23007W.05.30  
5w 3000k 759lm  
ηLB 100%

melis lighting