

Marici 120 Matt RGB-TW






RGB en Tunable white LED downlight met matte reflector en gesatineerde PS Microprisma afscherming. Voorzien van dimbaar RGB + tunable white LED technology (>100lm/w, 2500-7000k, CRI>90). Aanstuurbaar via DALI DT8 (slechts 1 BUS adres). RGB dimming 0-100%, CCT dimming 5-100%. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in theaters, musea en ziekenhuizen. Wordt geleverd inclusief externe DALI driver. Directe aansluiting op 48VDC of 220-240VAC. Zeer hoge initiële kleurstabiliteit Mac Adam <1. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (50.000 uur L90B10). Vijf jaar garantie.

RGB and tunable white modular LED downlight with high efficiency (>80%) matt aluminum reflector and satinated PS Microprism diffuser. Build-in RGB + tuneable white LED technology (>100lm/w, 2500-7000k, CRI>90). RGB dimming 0-100%, CCT dimming 5-100%. White painted die cast aluminum body (RAL9003). Ideal for museums, theaters and hospitals. Standard 0,5m cable. Delivered including external DALI driver. Direct connection to 48VDC or 220-240VAC. Very high initial colour stability, Mac Adam <1. Low maintenance and high life expectancy (50.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	48VDC 48VDC	220-240VAC 220-240VAC	Casambi Casambi
22w	1660	>90	0,75	23008W.22D.RGBM	23008W.22A.RGBM	23008W.22C.RGBM
31w	2160	>90	0,75	23008W.31D.RGBM	23008W.31A.RGBM	23008W.31C.RGBM

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

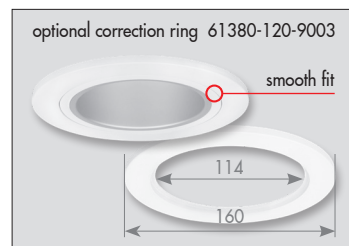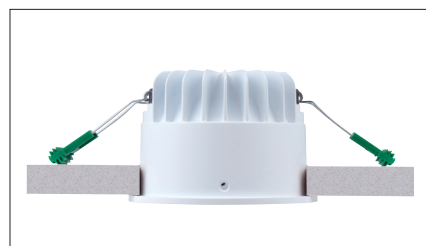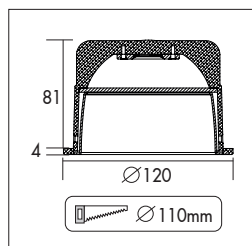


Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

Options:

- GST18i5® connector
- Different RAL color
- IP65



23008W.31D.RGBM
31w 2160lm
ηLB 72%

melis lighting

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS