

# Marici 120 Matt TW



IP44-65






Compacte tunable white LED downlight met lage inbouwhoogte en gesatineerde PS Microprisma afscherming. Brede bundel (>73°) en lage verblinding op maximaal vermogen (UGR<21). Matte aluminium reflector. Tunable white - dynamisch mengen van licht kleur tussen 2700K en 6500K. Wit gelakte (RAL 9003) aluminium behuizing. Zeer geschikt als basis verlichting in scholen, theaters en musea. Wordt geleverd inclusief externe DALI DT8 driver. Directe aansluiting op 220-240VAC. Kleurstabiliteit Mac Adam <3. Snelle en eenvoudige montage met veren. Onderhoudsvrij en hoge levensduurverwachting (60.000 uur L90B10). Vijf jaar garantie.

Compact tunable white modular LED downlight with satinated PS Microprism diffuser. Wide beam angle (>73°) and low glare at maximum power (UGR<21). Aluminum matt reflector. Tunable white - dynamic mixing of light colour, linear colour mixing between 2700K and 6500k. White painted die cast aluminum body (RAL9003). Very suitable as general lighting in schools, theatres and museums. Delivered including external DALI DT8 driver. Direct connection to 220-240VAC. Colour stability, Mac Adam <3. Low maintenance and high life expectancy (60.000 hours L90B10). Fast and easy mounting with springs. Five years warranty.


Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Gewicht (kg) Weight (kg)	Noodvoorz. (u) Emergency (h)	Dali Dali	Casambi Casambi
13w	2700-6500k	1100-1250	>92	0,75	1/3	23008W.13.TWM	23008W.13.TWMC
19w	2700-6500k	1455-1650	>92	0,75	1/3	23008W.19.TWM	23008W.19.TWMC
26w	2700-6500k	1920-2180	>92	0,75	1/3	23008W.26.TWM	23008W.26.TWMC
34w	2700-6500k	2375-2695	>92	0,75	1/3	23008W.34.TWM	23008W.34.TWMC

\* Lichtstroom van armatuur, tolerantie van +/- 10%

\* Luminaire luminous flux, tolerance of +/- 10%

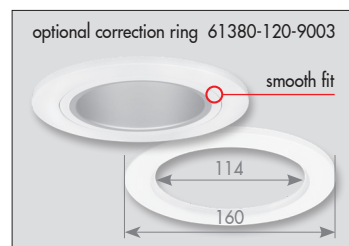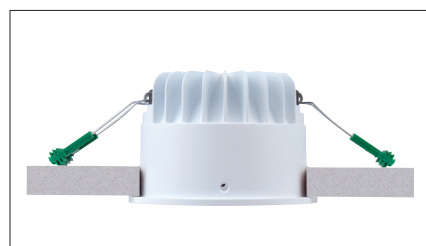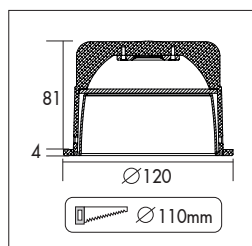

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS

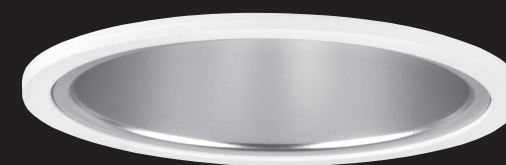


### Opties:

- GST18i5® connector
- Andere RAL kleur
- IP65

### Options:

- GST18i5® connector
- Different RAL color
- IP65



23008W.13.TWM  
13w 2700-6500k 1100-1250lm  
ηLB 72%

melis lighting

