

Marici 120 Matt






Ronde miniatuur LED downlight met een lage inbouwhoogte. Voorzien van decoratieve aluminium (99,9%) matte reflector met brede uitstraling >73° (UGR<21) en hoge efficiency (max 113lm/w) met **CRI>93 (R9>83)**. Gesatineerde PS Microprisma afscherming voor extra comfort. Wit gelakte (RAL 9003) aluminium behuizing. Wordt geleverd inclusief externe driver. Directe aansluiting op 220-240VAC. Snelle en eenvoudige montage met veren. Onderhoudsarm en hoge levensduurverwachting. Hoge kleurconsistentie SDCM <2. Vijf jaar garantie.

Round minature LED downlight with shallow build-in height. Matt aluminium reflector (99,9%) with wide beam angle >73° (UGR<21) and high efficiency (max 113lm/w) with **CRI>93 (R9>83)**. Satinated PS Microprism diffuser for high comfort. White painted die cast aluminum body (RAL9003). Delivered including external driver. Direct connection to 220-240VAC. Low maintenance and high life expectancy. High color consistency SDCM <2. Fast and easy mounting with springs. Five years warranty.

Wattage Watts	Kleur Colour	Lumen* Lumen*	CRI CRI	Amperage (mA) Amperage (mA)	kg kg	Noodvoorz. (u) Emergency (h)	Artikel nr. Article no.	Dimbaar (1-10V) Dimmable (1-10V)	Dali-2 Dali-2	Casambi Casambi
5w	3000k	565	>93	150	0,6	1/3	23008W.05.30M	23008W.05.31M	23008W.05.32M	23008W.05.35M
9w	3000k	938	>93	250	0,6	1/3	23008W.09.30M	23008W.09.31M	23008W.09.32M	23008W.09.35M
13w	3000k	1301	>93	350	0,6	1/3	23008W.13.30M	23008W.13.31M	23008W.13.32M	23008W.13.35M
19w	3000k	1830	>93	500	0,6	1/3	23008W.19.30M	23008W.19.31M	23008W.19.32M	23008W.19.35M
27w	3000k	2501	>93	700	0,6	1/3	23008W.27.30M	23008W.27.31M	23008W.27.32M	23008W.27.35M
5w	4000k	565	>93	150	0,6	1/3	23008W.05.40M	23008W.05.41M	23008W.05.42M	23008W.05.45M
9w	4000k	938	>93	250	0,6	1/3	23008W.09.40M	23008W.09.41M	23008W.09.42M	23008W.09.45M
13w	4000k	1301	>93	350	0,6	1/3	23008W.13.40M	23008W.13.41M	23008W.13.42M	23008W.13.45M
19w	4000k	1830	>93	500	0,6	1/3	23008W.19.40M	23008W.19.41M	23008W.19.42M	23008W.19.45M
27w	4000k	2501	>93	700	0,6	1/3	23008W.27.40M	23008W.27.41M	23008W.27.42M	23008W.27.45M

* Lichtstroom van armatuur, tolerantie van +/- 10%

* Luminaire luminous flux, tolerance of +/- 10%

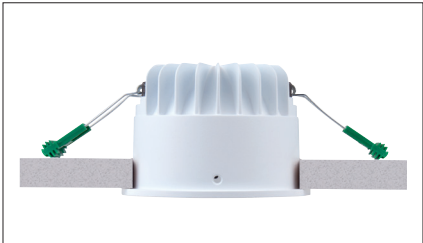

INBOUW DOWNLIGHTS RECESSED DOWNLIGHTS




- Opties:**
- 1,5 meter snoer met 3-polige Shuko stekker
 - 0,5 meter snoer + GST18i3® connector (niet - dimbaar)
 - 0,5 meter snoer + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter snoer + GST18i5® Blue connector male (dim)
 - Andere RAL kleur
 - 2700K, 3500k, 5000k of hogere CRI waarde 90/97
 - Vlees, brood of Crisp White
 - IP65

- Options:**
- 1,5m cable with Shuko 3-pin plug
 - 0,5 meter cable + GST18i3® connector (non - dimmable)
 - 0,5 meter cable + GST18i3® and BST14i2 connector (dim)
 - 0,5 meter cable + GST18i5® Blue connector male (dim)
 - Different RAL color
 - 2700k, 3500k, 5000k or higher CRI values 90/97
 - Meat, bread or Crisp White
 - IP65



Levensduurverwachting (uren) Life expectancy (hours)		
Watt	L80B10	L90B10
5	154.000	73.000
9	149.000	70.000
13	126.000	60.000
19	112.000	53.000
27	92.000	44.000



23008W.05.30M
5w 3000k 565lm
ηLB 100%

melis lighting